MILITARY SPECIFICATION

SURVIVAL KIT, INDIVIDUAL, AIRMAN'S

This specification is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for survival kit, individual, airman's designated as Type I. In addition, this specification covers the requirements for two major subassemblies of the above kit identified as Medical Packet Type II and General Packet Type III. Each type may be procured independently as a separate item of supply.

1.2 Classification. Airman's survival kits shall be of the following types, as specified:

Type I - Survival Kit, Individual Airman's (Including Medical Packet and General Packet)

Type II - Medical Packet, Survival Kit, Individual, Airman's

Type III - General Packet, Survival Kit, Individual, Airman's

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

L-P-375 - Plastic Film, Flexible, Vinyl Chloride

L-P-378 - Plastic Sheet and Strip, Thin Gauge, Polyolefin

L-P-535 - Plastic Sheet (Sheeting); Vinyl Chloride Polymer and Vinyl Chloride-Vinyl Acetate Copolymer, Rigid

V-T-295 - Thread, Nylon

FF-P-416 - Pins, Safety

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:38Z
Check the source to verify that this is the current version before use.

FEDERAL (Continued)

PPP-B-566	-	Boxes, Folding, Paperboard
PPP-B-636	-	Boxes, Shipping, Fiberboard
PPP-T-76	-	Tape, Pressure-Sensitive Adhesive Paper, Water Resistant, (For Carton Sealing)

MILITARY

MIL-B-131	-	Barrier Materials, Watervaporproof, Flexible, Heat-Sealable
MIL-P-149	-	Plastic Coating Compound, Strippable (Hot Dipping)
MIL-C-5040	-	Cord, Nylon
MIL-C-10928	-	Candy and Chocolate Confections
MIL-F-21840	-	Fastener Tape, Hook and Pile, Synthetic
MIL-L-38217	-	Light, Marker, Distress, SDU-5/E
MIL-C-43352	-	Cloth, Netting, Nylon, Tulle, Tricot
MIL-H-81843	-	Hood, Flyer's, Anti-Exposure, Inflatable, HGU-32/P

STANDARDS

FEDERAL

FED-STD-191	-	Textile Test Methods
FED-STD-595	-	Colors

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection By Attributes
MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-417	-	Rubber Composition, Vulcanized General Purpose, Solid (Symbols and Tests)

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:38Z
Check the source to verify that this is the current version before use.

MILITARY (Continued)

MIL-STD-751 - Stitches, Seams, and Stitching

DRAWINGS

Defense Personnel Support Center

24328 - Panel, Rescue, Signal, Medical Instructions

24357 - Mosquito Headnet and Mittens

NATIONAL STOCK NUMBERS

NSN 6505-00-104-9522 - Aspirin Tablets, USP 0.324 gm, 12s

NSN 6505-00-299-6175 - Sodium Sulfacetamide Opthalmic Ointment, Modified, 30 Percent, 1/8 oz (3.5 grams), 12s

NSN 6505-00-913-5872 - Diphenoxylate Hydrochloride and Atropine Sulfate Tablets, NF, 120s

NSN 6510-00-913-7906 - Bandage, Gauze, Elastic, 2-ply, 2 inches by 5 yards, 50s

NSN 6510-00-913-7909 - Bandage, Adhesive, 3/4 by 3 inches, 300s

NSN 6510-00-926-8881 - Adhesive Tape, Surgical, Porous, Woven, 1/2 inch by 10 yards, 24s

NSN 6515-00-926-2089 - Razor, Knife, Surgical Preparation, Straight Type, Small

NSN 6850-00-985-7166 - Water Purification Tablets, Iodine, 8 mg, 50s

(When requesting any of the applicable documents, refer to both title and number. All requests should be made via the cognizant Government quality assurance representative. Copies of this specification and other unclassified specifications and standards required by contractors in connection with specific procurement functions should be obtained upon application to the Commanding Officer, Naval Publications and Forms Center (Code 1051), 5801 Tabor Avenue, Philadelphia, Pennsylvania 19120. Copies of the Defense Personnel Support Center's unclassified drawings should be obtained upon application to the Commander, Defense Personnel Support Center (DPSC-ATTH), Material Standards Branch, Technical Operations Division, Directorate of Medical Material, 2800 South 20th Street, Philadelphia,

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:38Z
Check the source to verify that this is the current version before use.

Pennsylvania 19101. All other documents should be obtained from the procuring activity or as directed by the contracting officer).

3. REQUIREMENTS

3.1 First article. Unless otherwise specified, the airman's individual survival kits furnished under this specification shall be a product which has been inspected and has passed the first article inspection specified in 4.3 through 4.3.2.

3.2 Materials and components. The materials and components shall conform to applicable specifications, standards, and drawings, as listed or required herein. The processing plant, grounds, equipment, personal practices, and sanitary procedures used in the production of the survival kits shall minimize the possibility of contamination of the containers and the components through microbial growth, dust, pests, rodents, condensate, or other unsanitary sources. The products shall be prepared, processed, and handled in a manner that shall minimize deterioration or damage.

3.2.1 Bag. Each outer and inner carrying bag and the packet bag shall be fabricated from polyurethane-coated nylon taffeta based cloth conforming to the material specified in MIL-H-81843. The color of the material shall be Green, approximating 34097 of FED-STD-595, when inspected as specified in 4.6.2.

3.2.1.1 Carrying. Each outer and inner carrying bag may be fabricated from one piece of the coated cloth and the sides or the bottom and one side shall be heat sealed together. If desired, each outer and inner bag may be fabricated from two pieces of the coated cloth and the sides and bottom shall be heat sealed together. The packet bag shall be closed by folding and mating of the hook fastener tape to the pile cloth. The opening or openings, as applicable, at the top of each outer and inner bag shall be capable of being closed by firmly pressing together the hook and pile fastener tapes. The hook and pile fastener tapes shall conform to MIL-F-21840, Type I, Class 1, 5/8 inch wide, heat sealable coating on the underside. The color of the hook and pile fastener tapes shall approximately match the color of the outer and inner carrying and packet bag cloth, when inspected as specified in 4.6.2, or may be black. The fastener tapes shall be heat sealed on all the sides and ends to each outer and inner carrying and packet bag. The heat sealed seams of the bag and tapes, as applicable, shall be straight, continuous, and parallel to each other and the edges of the bag and tapes, as applicable. The method of heat sealing shall not have a deleterious effect on the cloth or fastener tapes. The fastener tapes when mated and separated from each other shall show no evidence of any heat seal or bond failure at any point between the pile and hook fastener tape attachment to any carrying or packet bag, as applicable. When inspected as specified in 4.6.3, the seam adhesion of each outer or inner carrying bag shall be not less than 12 pounds.

3.2.1.1.1 Outer. Each inner carrying bag shall be inserted into the proper outer carrying bag. The outer carrying bag shall conform to Figures 1, 2 and 3.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:38Z
Check the source to verify that this is the current version before use.

Each bag shall be marked in accordance with 3.4 and shall contain the markings specified in Figure 4, as applicable.

3.2.1.1.2 Inner. Two packet bags, each containing the specified items, shall be inserted into the applicable compartments of the proper inner carrying bag. The inner carrying bag shall conform to Figures 3, 5, 6 and 7, as applicable. Each bag shall be marked in accordance with 3.4 and shall contain the markings specified in Figures 8 and 9, as applicable.

3.2.1.1.3 Packet. The non-pile side of the pile fastener cloth, Number V-22-90, as manufactured by the Velcro Corporation, New York, New York, or equivalent shall be permanently and securely bonded to one side of the bag cloth by any suitable process in accordance with Figures 2, 3 and 7. The bonding process shall not affect the chemical and physical properties of the pile fastener cloth or the coated cloth. The laminated resultant packet bag cloth shall be free from wrinkles, puckers, and tackiness. There shall not be any bonding medium strike-through. The laminated packet bag shall be free from congealed masses of the bonding substance and spots or stains resulting from excess bonding material. The packet bag shall conform to Figures 10 through 13. The specified items for the 1A and 2A bags, as applicable, shall be attached by firmly pressing the hook fastener tape attached to the plastic envelope to the pile fastener cloth. The hook fastener tape on the water storage bag shall be used to attach the water storage bag to the pile fastener cloth. The name of the item on the paper label added to the inside of the plastic envelope or on the item itself, as applicable, shall be placed so that it shall be visible when the packet bag is opened. The items shall be neatly arranged in the 1A and 2A packet bags, as applicable, in a manner that shall prevent movement and afford adequate protection against damage to themselves, to the other components in the bag, or to the bag. The 1B and 2B bags shall each contain 27 squares of the hook fastener tape conforming to MIL-F-21840, Type I, Class 1, black in color, with a pressure-sensitive coating on the non-hook side. The size of the squares shall be 5/8 inch. The pressure-sensitive side shall be protected by a suitable liner. The liner shall be capable of free separation without affecting the adhesion properties of the pressure-sensitive coating. The squares shall be neatly arranged and attached to the packet bag by mating the hook fastener side to the pile fastener cloth side. As an alternate, 7/16 inch diameter discs may be substituted for the 5/8 inch squares. The bag shall be neatly folded and closed by mating the hook fastener tape attached to the outer side of the packet bag with the pile cloth.

3.2.2 Plastic envelope. Except for the elastic gauze bandage, 3.3.1.5, adhesive bandage, 3.3.1.6, water storage bag, 3.3.2.2, razor knife, 3.3.2.9, and the fire starter 3.3.2.8, all the other packet components and including the instruction cards shall be individually heat sealed with a snug fitting, clear, transparent, plastic envelope conforming to L-P-378, Type I, Class 1, 0.004 inch gage film. When applicable, a paper label (see 3.4.1) shall be inserted into the plastic envelope prior to the heat sealing. The heat sealed seams shall be straight and parallel to each other and the edges of the envelope. One end of the envelope shall contain an interrupted seal

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:38Z
Check the source to verify that this is the current version before use.

1/8 inch ± 1/32 inch that will permit air venting and yet preclude moisture from entering the envelope. The contents of each envelope shall not be damaged or affected by the sealing or manner of enclosing and shall not be caught in any of the envelope seams. One or more 5/8 inch squares or 7/16 inch diameter discs of the pressure-sensitive hook fastener tape specified in 3.2.1.1.3, as applicable, shall be attached to each plastic envelope and to the outer sealed containers of the elastic gauze and adhesive bandages and the razor knife. The location of the hook fastener tape on the envelope or outer sealed container, as applicable, shall be compatible with 3.2.1.1.3.

3.3 Packet components.

3.3.1 Medical packet. The medical packet shall contain the following components:

3.3.1.1 Tablets (see 6.4).

3.3.1.1.1 Aspirin. The aspirin tablets shall conform to National Stock Number NSN 6505-00-104-9522. A strip of 12 tablets shall be folded and heat sealed within the plastic envelope, 3.2.2.

3.3.1.1.2 Anti-diarrhea. The anti-diarrhea tablets shall conform to National Stock Number NSN 6505-00-913-5872. A strip of 8 tablets shall be folded and heat sealed in the plastic envelope, 3.2.2.

3.3.1.1.3 Water purification. The water purification tablets shall conform to National Stock Number NSN 6850-00-985-7166. One bottle containing 50 tablets shall be heat sealed within the plastic envelope, 3.2.2.

3.3.1.2 Ointment.

3.3.1.2.1 Sun and bug repellent. The sun and bug repellent ointment shall be Silicote Sun N Bug Insect Repellent and Sun Screen as manufactured by the Silicote Corporation, Oshkosh, Wisconsin; or Sun Screen and Insect Repellent as manufactured by the Day-Baldwin, Incorporated, Hillside, New Jersey; or equivalent. One ounce of the sun and bug repellent ointment shall be packaged in a metal squeeze tube. Closure of the tube shall be effected by a hand tightened plastic threaded cap in such a manner which shall prevent the contents from leaking. To further prevent the contents from leaking from the cap, the cap and the upper portion of the tube shall be dipped into a compatible plastic solution which shall harden to form a leak-proof film seal (see 6.5). The plastic sealing shall exhibit good adhesion to the cap and tube and shall not contain any signs of cracking or crazing down to cap or tube. The plastic sealing shall result in a neat and complete seal of the tube and cap juncture. The sealed area shall not contain any air bubbles. The sealing shall not obliterate any of the tube markings. The capped and sealed tube shall be approximately 4-3/4 inches in length and one inch in diameter. The tube shall contain the following information:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:38Z
Check the source to verify that this is the current version before use.

SUN N BUG INSECT REPELLENT AND SUNSCREEN or
INSECT REPELLENT AND SUN SCREEN

USAGE

TO REPEL INSECTS AND TO PREVENT SUN AND WINDBURN

DIRECTIONS FOR USE

APPLY OINTMENT LIGHTLY TO ALL EXPOSED SKIN AREAS.
KEEP OUT OF EYES.

One sealed sun and bug repellent tube shall be heat sealed within the plastic envelope, 3.2.2.

3.3.1.2.2 Eye (see 6.4). The eye ointment shall conform to NSN 6505-00-299-8175. Closure of the tube shall be effected by a hand tightened plastic threaded cap in such a manner which shall prevent the contents from leaking. To further prevent the contents from leaking from the cap, the cap and the upper portion of the tube shall be dipped into a compatible plastic solution which shall harden to form a leakproof film seal (see 6.5). The plastic sealing shall exhibit good adhesion to the cap and tube and shall not contain any signs of cracking or crazing down to cap or tube. The plastic sealing shall result in a neat and complete seal of the tube and cap juncture. The sealed area shall not contain any air bubbles. The sealing shall not obliterate any of the tube markings. One sealed eye ointment tube shall be heat sealed within the plastic envelope, 3.2.2.

3.3.1.3 Cake of soap. The cake of soap shall be any kind commercially available that is unscented. The cake of soap shall be approximately 1-1/4 by 2 by 1/4 inches and a net weight of approximately 1/2 ounce. The cake of soap shall be covered with an inner wrapper of waxed paper and an outer wrapper of paper. The outer wrapper shall contain the name of the contents SOAP. Commercial wrapping and marking shall be acceptable. One wrapped cake of soap shall be heat sealed within the plastic envelope, 3.2.2.

3.3.1.4 Waterproof receptacle. The non-lubricated waterproof receptacle shall be regular weight latex rubber prophylactic Number 50 THINS as manufactured by the Young Rubber Company, New York, NewYork; or Silver-Tex as manufactured by the Killian Manufacturing Division of the Akwell Corporation, Akron, Ohio; or equivalent. The rubber prophylactic shall be hermetically sealed. The overall dimensions shall be 2-5/8 inches by $1 \pm 1/8$ inch. The package shall be marked with the name of the contents. Commercial wrapping and marking shall be acceptable. One hermetically sealed prophylactic shall be heat sealed within the plastic envelope, 3.2.2.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:38Z
Check the source to verify that this is the currentversion before use.

3.3.1.5 Elastic gauze bandage (see 6.4). The elastic gauze bandage shall conform to NSN 6510-00-913-7906. One wrapped bandage shall be included in the kit.

3.3.1.6 Adhesive bandages (see 6.4). The adhesive bandages shall conform to NSN 6510-00-913-7909. Commercial markings shall be acceptable. The kit shall contain six adhesive bandages.

3.3.1.7 Adhesive tape (see 6.4). The adhesive tape shall conform to NSN 6510-00-926-8881. One roll shall be heat sealed within the plastic envelope, 3.2.2.

3.3.1.8 Instruction card. The instruction card, for Medical Packet 1A, shall be fabricated from the polyvinyl chloride plastic sheeting conforming to L-P-535, Composition A, Type I, Class 1, 0.010 inch thick, opaque, white in color. The markings shall be accomplished by the lithograph, photo-offset, or silk screen process. The markings shall be sharply defined and legible. A clear sheet of compatible polyvinyl chloride plastic shall be laminated over the markings. The total thickness of the laminated instruction card shall be not greater than 0.015 inch. The markings and the size of the card and the markings shall conform to Figure 14. The instruction card shall be heat sealed within the plastic envelope, 3.2.2.

3.3.2 General packet. The general packet shall contain the following components:

3.3.2.1 Flash guards. Flash guards and filters shall be fabricated in accordance with Figures 16 through 18. The material used in the fabrication of the Flash Guard shall conform to MIL-STD-417, Type S, Class SC. The carrier material for the filters shall be high quality commercial Butyrate. The blue filter shall approximate Munsel Notation 7.5 PB 3/14. The infrared filter shall transmit maximumly in the infrared spectro range and shall not transmit visible energy below the infrared energy.

3.3.2.2 Water storage bag. The water storage bag shall be fabricated from flexible vinyl chloride plastic film conforming to L-P-375. Type II, Class 1, 0.008 inch thick, colorless, and shall conform to Figures 19 through 21. The lips of the neck portion shall be reinforced, on each side, with 0.020 inch thick plastic film conforming to L-P-375, Type II, Class 1. The hook and pile fastener tapes shall conform to MIL-F-21840, Type I, Class 1, 5/8 inch wide, black in color, heat sealable coating on the underside. Each water storage bag shall be marked in accordance with 3.4 and shall contain the markings specified in Figure 22. The bag shall be neatly folded to an approximate size of 2-1/2 by 2 by 1 inches and held together with a polychloroprene rubber band. The bag shall be folded in such a manner that the hook fastener tape shall be used to attach the water storage bag to the pile fastener cloth of the packet bag.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:38Z
Check the source to verify that this is the current version before use.

3.3.2.3 Tweezer and safety pins. The square-jaw tweezer shall have two identical legs joined together at the end opposite the tips to form a solid one-piece. The tweezers shall be fabricated from stainless steel. The width at the tip shall be approximately 1/8 inch. The overall length of the tweezers shall be approximately 3-1/2 inches. The safety pins shall conform to FF-P-416, Sizes 1 and 2. Three Size 1 and two Size 2 safety pins shall be heat sealed with one tweezer within the same plastic envelope, 3.2.2.

3.3.2.4 Mosquito headnet and mittens. The mosquito headnet and mittens shall be fabricated from the nylon tulle cloth conforming to MIL-C-43352, Class 2, black in color. The headnet and mittens shall be constructed in accordance with Drawing 24357. The dimensions of the assembled headnet and mittens, as applicable, shall be obtained without stretching the cloth. One headnet and one pair of the mittens shall be compressed together, without damage, to an approximate rectangular size of 2-3/4 by 2-1/4 by 3/4 inch. The headnet and the pair of the mittens shall be heat sealed together within the plastic envelope, 3.2.2.

3.3.2.5 Chewing gum. The chewing gum shall be Chiclets as manufactured by the Warner-Lambert Pharmaceutical Company, Morris Plains, New Jersey, or equivalent. Three pairs of assorted flavors of the gum shall be commercially packaged or wrapped so that each pair can be separated without damage to the other pairs. The three pairs may be packaged in individual pairs or the pairs may be joined together in strips. The three pairs of the packaged gum shall be heat sealed within the plastic envelope, 3.2.2.

3.3.2.6 Candy.

3.3.2.6.1 Assorted flavors. The assorted flavored hard candy shall be Charms, eight pieces per rectangular package, as manufactured by Charms Candy Co., or equivalent. Commercial markings and packaging shall be acceptable. One package of the hard candy shall be heat sealed within the plastic envelope, 3.2.2.

3.3.2.6.2 Coffee flavor. The coffee flavored hard candy shall be Enerjets, 10 pieces individually wrapped per rectangular package, as manufactured by the Chilton Laboratories, West Caldwell, New Jersey, or equivalent. One rectangular package of the coffee flavored hard candy shall be heat sealed within the plastic envelope, 3.2.2.

3.3.2.7 Wrist compass, strap, and lanyard. The wrist compass and strap shall conform to Waltham Precision Instrument Company, Waltham, Massachusetts, Drawing 91576, or East/West Industries, Farmingdale, NY, PN/165D100-1 or equivalent, except that radium paint shall not be used. The 30 degree graduation marks, arrow, and letters E, S, and W shall be filled by fluorescent phosphorescent material. In addition to the strap, a 40 inch length of nylon cord conforming to MIL-C-5040, Type IA shall be looped through one of the compass strap brackets and the ends shall be tied together with a square knot to form a lanyard so that the compass may be

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:38Z
Check the source to verify that this is the current version before use.

suspended from the neck of the user. The cut ends of the cord shall be seared to prevent raveling and shall not contain any sharp edge. The color of the lanyard shall be the same as the strap. The lanyard shall be neatly wrapped around the compass. The strap shall also be neatly wrapped around the compass and the end shall be passed through the strap loop to hold the strap in position. One compass shall be heat sealed within the plastic envelope, 3.2.2.

3.3.2.8 Fire starter. The fire starter for Type II and Type IV ax kits shall consist of a synthetic flint, a plastic cap on one end, and a flexible retaining loop. The flint shall be fabricated from a pyrophoric alloy substance adequately compounded for strength to withstand breaking and to produce sparks of sufficient intensity to induce fire. The flint size shall be approximately 2-1/2 inches in length by 1/4 inch diameter. One end shall be securely embedded into a suitable compounded colored plastic cap approximately 15/16 inch in length by 3/8 inch diameter. The upper end of the cap shall contain a through hole for accommodating a flexible retaining loop. The retaining loop shall be constructed from a material resistant to corrosion, and shall measure, when extended, a minimum of 4 inches. The retaining loop, with an instruction card attached to it, shall be threaded through the hole in the cap and the ends joined securely together.

3.3.2.8.1 Coating and packaging of fire starter. Each fire starter shall be dipped in coating material conforming to MIL-P-149 Type II, color light blue. The coating material shall cover the full length of the fire starter including a portion of the cap. The fire starter, a dessicant capsule 1/4" by 1-3/4", and instruction card, shall be heat sealed together within an envelope made of waterproof barrier material conforming to MIL-B-131, Class 1.

3.3.2.8.1.1 Instruction card. The instruction card shall contain the following information:

FIRE STARTER

IMPORTANT, Do not stow fire starter after removal from package

3.3.2.9 Razor knife. The razor knife shall be NSN 6515-00-926-2089. One razor knife packaged as received shall be included in the kit.

3.3.2.10 Rescue, signal, and medical instruction panel. The rescue, signal, and medical instruction panel shall be fabricated in accordance with Drawing 24328 (see 6.3). The panel shall be folded into a rectangle not more than 3-1/4 by 4-5/8 inches. The panel shall be heat sealed within the plastic envelope, 3.2.2.

3.3.2.11 Signalling mirror. The signalling mirror shall be fabricated from Type 430 stainless steel, 25 gage, Number 8 finish on both sides. The size of the mirror shall be 2 x 3 inches; the four corners shall be rounded approximately 1/4R and all sharp edges shall be broken. The mirror shall contain a centered 3/16

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:38Z
Check the source to verify that this is the current version before use.

inch diameter sighting hole. The mirror shall also contain one hole in one corner 3/16 inch in diameter. The mirror shall be heat-sealed within the plastic envelope, 3.2.2.

3.3.2.12 Instruction card. The instruction card for the General Packet 2A, shall conform to the requirements for the Medical Packet 1A instructions card 3.3.1.8, except that the markings and size of card shall conform to Figure 15.

3.4 Markings. Unless otherwise specified, the markings shall be legible and durable upper case black letters and Arabic numerals and shall be thoroughly dry prior to packaging. The markings shall be lusterless and the letters and numerals shall be sharply defined. The markings shall be accomplished by using such methods and materials as shall be resistant to erasure or fading under the condition of usage. The marking medium shall not contain any materials which are deleterious to the substance being marked.

3.4.1 Paper label. A white paper label marked in accordance with 3.4 shall be inserted into the plastic envelope for the flash guards, mosquito headnet and mittens, tinder, and rescue, signal, and instruction panel, prior to heat sealing. The label shall be placed so that the information on the label shall be capable of being read through the envelope and shall be compatible with 3.2.1.1.3 and 3.2.2. The paper label shall contain the name of the contents.

3.5 Performance.

3.5.1 Expansion due to altitude. When inspected as specified in 4.6.4, each sealed plastic envelope shall not burst or break. Each sealed seam shall remain intact.

3.5.2 Pressure. When inspected as specified in 4.6.5, there shall be no structural damage. Water leakage from between the lips of the folded-down neck shall not exceed 104 ml.

3.5.3 Drop test. When inspected as specified in 4.6.6, there shall be no evidence of structural damage to the water bag.

3.6 Workmanship. The survival kit or separately procured packet shall not contain any spot, stain, hole, abraded area, tear, cut, mend, or pucker and tackiness. The metal components shall not be misaligned or distorted nor contain any corrosion, scale, pit, dent, unspecified sharp edge, crack, nick, burr, or sliver. Because of the emergency and life support use of these kits or packets, the importance of providing a product of uniform excellent quality cannot be overemphasized. The kits or packets shall be uniform in quality and shall be free from irregularities or defects which could adversely affect performance, reliability, or durability. The kits shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the acceptance criteria established herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:38Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Records. Records of kit or medical packet serial numbers (see 6.2), and records of examinations and tests performed by or for the contractor shall be maintained by the contractor and made available to the Government, upon the Government's request, at any time, or from time to time, during the performance of the contract and for a period of three years after delivery of the supplies to which such records relate.

4.1.2 Certificates of quality. Certificates of quality, supplied by the manufacturer of the coated nylon cloth, fastener tapes, plastic envelopes, and contractor furnished components, may be furnished in lieu of actual performance of such testing by the contractor, provided lot identity has been maintained and can be demonstrated to the Government. The certificate shall include the name of the contractor, the contract number, the name of the manufacturer or supplier, the NSN, the item identification, the name of the component/material, the lot number, the lot size, the sample size, the date of testing, the test method, individual test results, and the specification requirements.

4.2 Classification of inspection. The examination and testing of the airman's, individual survival kits shall be classified as follows:

a. First article inspection. First article inspection consists of examinations and tests performed on samples which are representative of the production item after award of a contract to determine that the production item conforms to the requirements of this specification (see 3.2 and 4.3 through 4.3.2).

b. Quality conformance inspection. Quality conformance inspection consists of examinations and tests performed on individual products or lots to determine conformance of the products or lots with the requirements set forth in this specification (see 4.4 through 4.4.1.2).

4.3 First article inspection. The first article inspection of the total assembly or individual packets shall consist of examinations and tests for all the requirements of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:38Z
Check the source to verify that this is the current version before use.

4.3.1 First article samples. Unless otherwise specified, as soon as practicable after award of the contract or order, the contractor shall submit three survival kits or packets as applicable. The samples shall be representative of the construction, workmanship, components and materials to be used during production. When a contractor is in continuous production of these kits or packets from contract to contract, submission of further first article inspection samples, on the new contract, may be waived at the discretion of the procuring activity (see 6.2(d)). Approval of the first article inspection samples or the waiving of the first article inspection does not preclude the requirements for performing the quality conformance inspection. The first article inspection samples shall be furnished to the Government as directed by the contracting officer (see 6.3(e)).

4.3.2 Upon completion of the first article inspection, all the applicable inspection reports and when applicable, recommendations and comments pertinent for use in monitoring production will be forwarded to the cognizant Government activity. One of the approved kits or packets will be returned to the manufacturer for use in monitoring production. The other two kits or packets will be consumed or destroyed in the first article inspection and shall not be considered as part of the quantity to be delivered under contract.

4.4 Quality conformance inspection. The sampling and inspection levels shall conform to MIL-STD-105. The quality conformance inspection shall consist of the following:

Visual examination of the kits or packets
Packaging

4.4.1 Sampling.

4.4.1.1 Inspection lot.

4.4.1.1.1 Survival kits or packets. An inspection lot size shall be expressed in units of one survival kit (medical packet plus general packet in their respective carrying bags) or one complete packet assembled essentially from the same materials and components. The sample unit shall be one survival kit (medical packet plus general packet in their respective carrying bags) or one complete packet.

4.4.1.1.2 Packaging. An inspection lot size shall be expressed in units of one fully prepared shipping container, containing survival kits (medical packet plus general packet in their respective carrying bags for each kit) or packets fully prepared for delivery from essentially the same materials and components. The sample unit shall be one shipping container, containing survival kits (medical packet plus general packet in their respective carrying bags for each kit) or packets fully prepared for delivery with the exception that it need not be sealed.

4.4.1.2 Sampling for examinations and tests of the survival kits or packets and packaging. The sample size, acceptance criteria, examinations and tests required for the survival kits or packets or the packaging, as applicable, shall be as specified in Table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:38Z
Check the source to verify that this is the current version before use.

TABLE I. Sample size acceptance criteria, examinations and tests of the survival kits or packets, and packaging

Inspection	Paragraph		Sample size	Acceptance criteria
	Requirement	Method		
Visual examination	3.2 through 3.4.1, 3.6, and Figures 1 through 25, as applicable	4.6.1.1	Inspection Level II	An acceptable quality level of 2.5 defects per 100 units for major defects and 6.5 defects per 100 units for total (major plus minor) defects
Dimensional check	3.2.1.1, 3.2.1.1.3, 3.2.2, 3.3.1.2.1, 3.3.1.3, 3.3.1.4, 3.3.1.8, 3.3.2.2 through 3.3.2.4, 3.3.2.7, 3.3.2.10 through 3.3.2.12, and Figures 1 through 25, as applicable	4.6.1.1	Inspection Level S-2	An acceptable quality level of 4.0 defects per 100 units
Packaging	Section 5	4.6.1.2	Inspection Level S-2	An acceptable quality level of 2.5 defects per 100 units
Color matching	3.2.1.1	4.6.2	Inspection Level S-2	AQL of 4.0 per 100 units
Seam adhesion	3.2.1.1	4.6.3	Inspection Level S-2	AQL of 4.0 per 100 units
Expansion due to altitude	3.5.1	4.6.4	Inspection Level S-2	AQL of 4.0 per 100 units

4.5 Inspection conditions.

4.5.1 Atmospheric conditions. Unless otherwise specified, all inspections required by this specification shall be conducted at an atmospheric pressure of 28 to

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:38Z
Check the source to verify that this is the current version before use.

32 inches of mercury and at a temperature of 77 ±18 degrees Fahrenheit (25 ±10 degrees Centigrade). When the inspections are conducted at an atmospheric pressure or temperature different from the above values, proper corrections shall be made for the change in instrument reading.

4.6 Inspection methods.

4.6.1 Visual examination.

4.6.1.1 Survival kits or packets. Each survival kit (medical packet plus general packet in their respective carrying bags) or complete packet selected as a sample unit from the lot, shall be thoroughly checked dimensionally and examined visually to determine conformance to this specification. The classification list of defects, Tables II and III, as applicable, shall be used to classify and enumerate the defects found.

TABLE II. Classification of defects for the visual examination of the survival kits or packets

Defect	Major	Minor
a. Any evidence of foreign matter, spots, stains, rust, or dirt	X	
b. Any component or any part of a component missing, damaged, deformed, broken, cracked, fogged, bent, crushed, chipped, kinked, torn, tangled, twisted, not attached to the packet bag, defective, or not as specified	X	
c. Any non-specified hole, tear, mend, burn, or any weakening defect such as deep scratches, abrasion marks, or dents	X	
d. Any surface rough, misaligned, or contains any nick, crack, burr, or unspecified sharp edge	X	
e. Any component damaged by the packaging or is not packaged as specified, or any container broken, cracked, damaged, or any seal open	X	
f. Any component contains any mend or splice	X	
g. Color of any component not as specified or not uniform	1/	
h. Less than 10 percent of the hooks or pile flattened or missing from any fastener tape		X

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:38Z
Check the source to verify that this is the current version before use.

TABLE II. (Continued)

	Defect	Major	Minor
i.	10 percent or more of the hooks or pile flattened or missing from any fastener tape	X	
j.	Any bonding medium strike through to the surface of the laminated pile fastener cloth	1/	
k.	Any wrinkle, pucker, gathering of the cloth, or area of delamination on the laminated packet bag cloth	1/	
l.	Any portion of any fastener tape, coated cloth, or plastic envelope stiffened, hardened, or scorched by any process of manufacture	1/	
m.	Any plastic envelope not fabricated from clear film, (3.2.2) or any seam open other than the specified interrupted seal	X	
n.	Information on the paper label, as applicable, not readable through the plastic envelope or no label in the envelope as required		X
o.	Name of the item not visible when any packet bag is opened		X
p.	Any medicinal instruction marking, date of manufacture, or expiration date, as applicable, of any medicinal product missing, illegible, incomplete, incorrect, improperly located, or not easily discernible	X	
q.	All the other medicinal instruction markings missing, illegible, incomplete, incorrect, improperly located, or not specified size		X
r.	Any instruction card missing, illegible, incorrect, incomplete, or not fabricated as specified		X
s.	Any carrying or inner bag marking missing, illegible, incorrect, or incomplete		X
t.	Any ointment tube cap not sealed as specified	X	

1/ The defect shall be classified as major, when it seriously affects the serviceability or appearance, otherwise it shall be classified as a minor defect.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:38Z
Check the source to verify that this is the current version before use.

TABLE III. List of defects for the dimensions of the assembled kit or packet

Examine	Defect
Measure the outer, inner, and packet bag, and all the components	Any measurement deviating from the dimensions and tolerances as specified shall be enumerated as a dimensional defect.

4.6.1.2 Packaging. Each of the fully prepared shipping containers, containing survival kits (medical packets plus general packet in their respective carrying bags for each kit) or packets, selected as a sample unit from the lot, shall be visually examined to determine that the packaging, packing, and marking conform to this specification. The list of defects, Table IV, shall be used to enumerate the defects found.

TABLE IV. List of defects for packaging

Item	Defects
Exterior and interior markings	Missing, incorrect, incomplete, or illegible; of improper size, location, sequence, or method of application; markings not the same on the interior and exterior containers.
Packaging and packing materials	Any non-conforming component; any component missing, damaged, or otherwise defective.
Workmanship	Inadequate application of the components such as incomplete closure of the unit package, container flaps, or loose strapping; bulging or distortion of any container.
Exterior and interior weight or content	Number per container is more or less than required; gross or net weight exceeds the requirements; each kit not composed of a medical packet plus a general packet.

4.6.2 Color matching. The color of the bag cloth and the nylon fastener tapes (when not black in color), as applicable, shall be compared to the approved standard shade under natural (north sky) daylight or artificial daylight having a color temperature of 7500 degrees Kelvin.

4.6.3 Seam adhesion. Five specimens, $1 \pm 1/16$ inch wide and $6 \pm 1/16$ inches long, shall be cut across and perpendicular to the seams of the outer carrying

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:38Z
Check the source to verify that this is the currentversion before use.

bag. The specimens shall be cut from different locations so as to be representative of the sealing of the entire bag. The specimens shall be taken from the straight portion of bag. One free end of one specimen (end not bonded) shall be placed in the upper jaw and the other free end in the lower jaw of a suitable inspection apparatus equipped with an autographic recording device (see FED-STD-191, Method 5100). The seam portion of the specimen shall be in the center between the two jaws. The jaws shall be separated until failure occurs, either breaking of the cloth or separation of the bond. In either case, the result obtained shall be not less than that specified in 3.2.1.1. The highest value obtained shall be taken as the result, for the seam adhesion, for the individual inspected specimen. The rate of jaw separation, under no load, shall be 12 ± 1/2 inches per minute. The front clamp of each jaw shall be 1 by 3 inches. The remaining four specimens shall be similarly treated and inspected. The inspection results of the five specimens shall not be averaged. Each individual specimen shall conform to the seam adhesion requirement specified in 3.2.1.1. The inner carrying bag shall be similarly inspected.

4.6.4 Expansion due to altitude. The components of each kit or packet, in their sealed plastic envelopes, shall be inserted into a suitable air-tight container. The pressure within the container shall be reduced to an absolute pressure of 100 ± 10 millimeters of mercury in a maximum time of 15 minutes. The pressure shall be maintained for 5 ± 1 minutes and the plastic envelopes observed for bursting and opening of the sealed area. Upon completion of the observation, the pressure in the air-tight container shall be returned to normal within one minute and the plastic envelopes examined for bursting and opening of the sealed area (see 3.5.1).

4.6.5 Pressure. A water storage bag conforming to 3.3.2.2 shall be filled with water to the quart line. The top of the bag shall be folded down tightly by securing pile fastener tape on the neck to hook fastener tape on the front of the bag. The closure shall be reinforced by securing hook fastener tape, attached to the back of the bag to pile fastener tape on the front of the bag. The water filled bag shall then be subjected to a 70 pound, uniformly applied external load for 15 minutes. The water bag shall conform to the requirements of 3.5.2.

4.6.6 Drop test. A water storage bag conforming to 3.3.2.2 shall be filled with water and closed securely. The bag shall then be dropped from a height of 10 feet to a smooth rigid surface. The water bag shall conform to the requirements of 3.5.3.

5. PACKAGING

5.1 Packaging. Packaging shall be Level A or C, as specified (see 6.2(f)).

5.1.1 Unit of issue. Each survival kit or each packet, as specified, constitutes one unit of issue.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:38Z
Check the source to verify that this is the currentversion before use.

5.1.2 Packaging quantities. The number of units of issue indicated in Table V shall be packaged in each unit and exterior container, as applicable, for the required level of protection specified in the procurement document.

TABLE V. Packaging quantities

Item	Unit package	Intermediate package	Exterior container
Kit	1 unit	Not required	25 units
Packet	1 unit		24 units

5.1.2.1 Packing variation permitted. If the required number of units in the entire shipment is less than the number of units specified to be overpacked in an exterior container, such units may be packed in an exterior container of suitable size and design, acceptable to a common carrier, which shall insure safe delivery to destination.

5.1.3 Level A.

5.1.3.1 Unit package.

5.1.3.1.1 Kit. The survival kit (medical packet plus general packet in their respective carrying bags and with the belt loops of each carrying bag folded down) shall be packaged within a 0.032 inch thick kraft lined chipboard folding box, approximately 10-1/2 inches deep, 6-1/2 inches long and 3 inches wide conforming to PPP-B-566, Variety 1, Style II, Type D, Class A, notched tucks. A paperboard separator, of the same composition and thickness as the paperboard box, shall be placed between the two carrying bags. The size of the separator shall be approximately 10-1/4 by 6-1/4 inches. Closure of box shall be secured.

5.1.3.1.2 Packet. Each packet, inserted within the carrying bag and with the belt loop of each bag folded down shall be packaged with a 0.032 inch thick kraft lined chipboard folding box, approximately 10-1/2 inches long, 6-1/2 inches wide and 1-1/4 inches deep. The box shall conform to PPP-B-566, Variety 1, Style II, Type D, Class A, notched tuck. Closure of box shall be secured.

5.1.3.1.3 Level C. The survival kit or packet, inserted in their respective carrying bags, shall be packaged to afford the minimum degree of protection necessary to prevent deterioration or damage during shipment under normal environmental conditions and commercial modes of transportation.

5.2 Packing. Packing shall be Level A, B, or C, as specified (see 6.2(f)).

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:38Z
Check the source to verify that this is the currentversion before use.

5.2.1 Level A.

5.2.1.1 Exterior container. Exterior container shall be a snug fitting box constructed in accordance with PPP-B-636, Class weather resistant, Grade V3c or V3s. Closure, strapping and waterproofing shall be as specified in the appendix of the box specification.

NOTE

Strapping shall not be required for shipments forwarded to a receiving activity within the continental limits of the United States for storage and redistribution.

5.2.2 Level B.

5.2.2.1 Exterior container. Exterior container shall be a snug fitting box constructed in accordance with PPP-B-636, Type CF or SF, Class domestic, Grade 275. Method II closure as specified in PPP-B-636 shall be utilized. In addition, all seams shall be sealed with a minimum of 3 inch wide tape conforming to PPP-T-76.

5.2.3 Level C. The packaged survival kits or packets shall be packed within exterior type shipping containers in a manner that shall insure safe transportation at the lowest rate to the point of delivery. The shipment shall conform to the minimum requirements of the rules and regulations applicable to the mode of transportation selected.

5.3 Marking. In addition to any special markings required by the contract (see 6.2(g)), the interior container shall be marked in accordance with Figure 23, 24 or 25. The exterior container shall be marked in accordance with MIL-STD-129 and shall include the date of assembly (month and year).

6. NOTES

6.1 Intended use. The survival kits covered by this specification are intended to be used by aircraft personnel in emergency situations.

6.2 Ordering data. Procurement documents shall specify the following:

a. Title, number, and date of this specification.

b. Quantity desired.

c. Whether first article inspection is waived (see 4.3.1).

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:38Z
Check the source to verify that this is the current version before use.

d. Name and address of the first article inspection laboratory (see 4.3.1).

e. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

f. Special markings for the interior container is required (see 5.3).

g. See 6.4 for Government furnished components.

h. See 6.3 for pattern drawing information.

6.3 Pattern drawing. The Defense Personnel Support Center Drawing 24328 is actually a full scale pattern that shows the exact size and location of the printing and symbols. This pattern drawing may be obtained from the Commander, Defense Personnel Support Center, 2800 South 20th Street, Philadelphia, Pa. 19101, Attention: Code DPSC-ATTH-2.

6.4 Medicinal drugs and bandages. The Government will furnish to the kit contractor, the following medical components:


Aspirin tablets
Anti-diarrhea tablets (diphenoxylate hydrochloride and atropine sulfate)
Water purification tablets
Eye ointment (sodium sulfacetamide ophthalmic)
Elastic gauze bandage
Adhesive bandage
Adhesive tape
Razor, surgical preparation (Razor knife)

6.5 Ointment tubes. It is to be noted that it is the responsibility of the kit contractor to have the sun and bug repellent and the eye ointment tubes sealed as required by 3.3.1.2.1 and 3.3.1.2.2 even though a proprietary and Government item is specified and furnished.

6.6 Data. For the information of contractors and contracting officers, any of the data, specified in the applicable documents, listed in Section 2 of this specification, or referenced lower-tier documents, need not be prepared for the Government and shall not be furnished to the Government, unless specified in the contract or order. The data, to be furnished, shall be listed on DD Form 1423 (Contractor Data Requirements List), which shall be attached to and made a part of the contract or order. NavWeps Form 4200/25 (Drawings, Lists, and Specifications Required) shall be attached, where applicable.

Preparing activity:
Navy - AS
(Project No. 4240-N680)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:38Z
Check the source to verify that this is the current version before use.

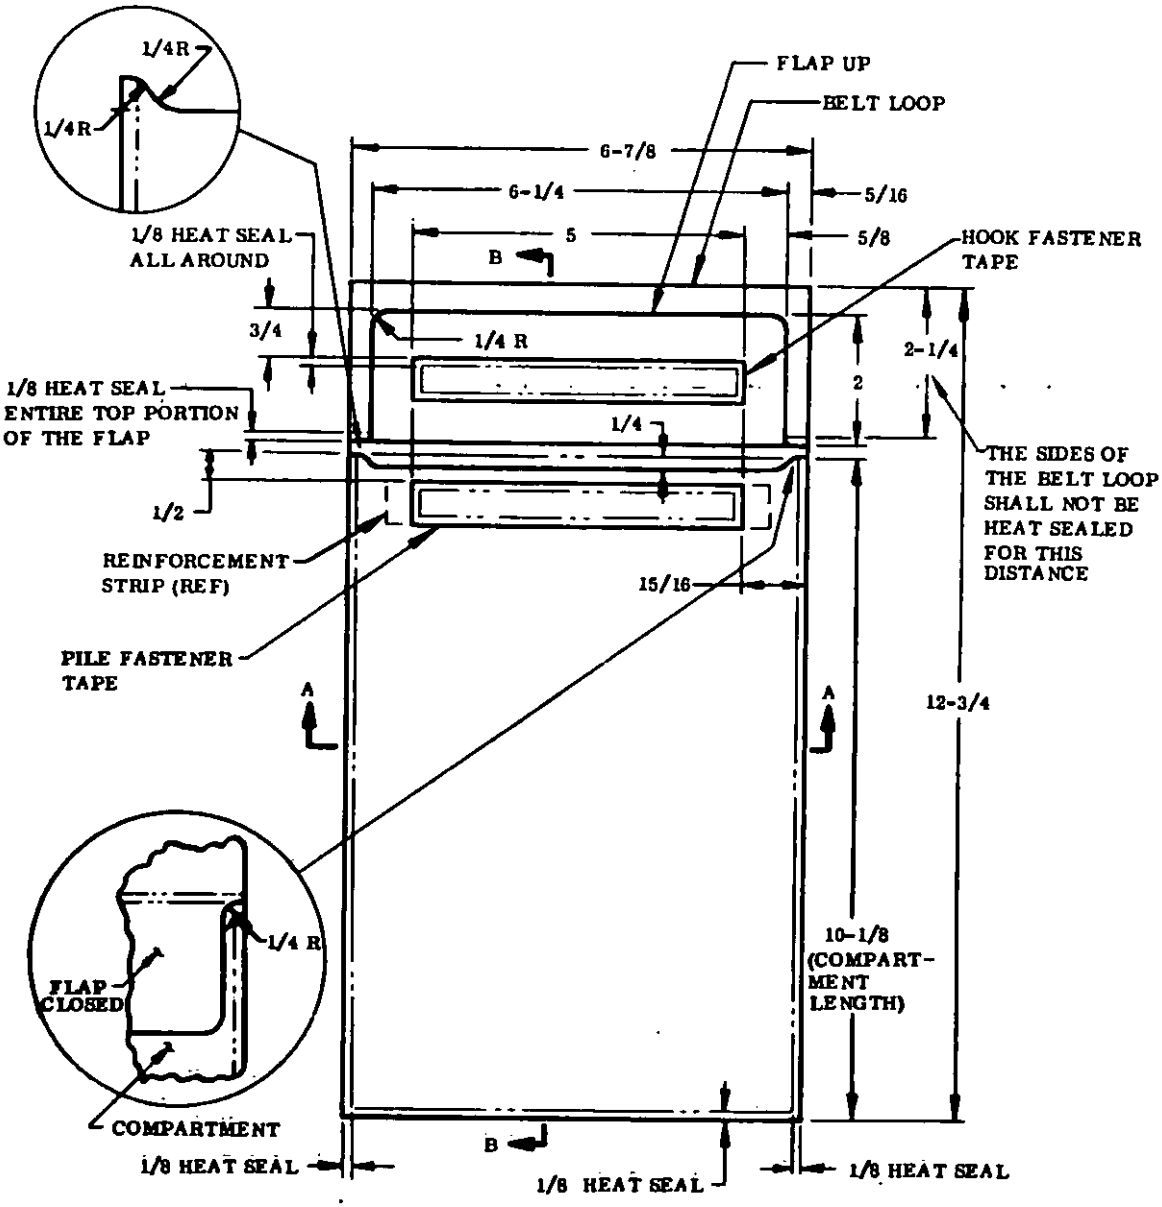


DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ON DIMENSIONS SHALL BE AS FOLLOWS:

DIMENSIONS	TOLERANCES
0 TO 1/2	±1/32
OVER 1/2 TO 1	±1/16
OVER 1 TO 5	±1/8
OVER 5 TO 10	±1/4
OVER 10	±3/8


FOR SECTIONS A-A AND B-B, SEE FIGURE 2.
FOR MARKINGS SEE FIGURE 4.
FOR HEAT SEAL PERFORATIONS (FRONT PANEL) AND REINFORCEMENT STRIP, SEE FIGURES 2 AND 3.

FIGURE 1. Outer carrying bag

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:38Z
Check the source to verify that this is the current version before use.

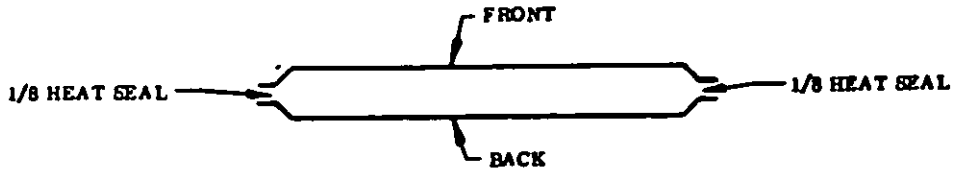

SECTION A-A

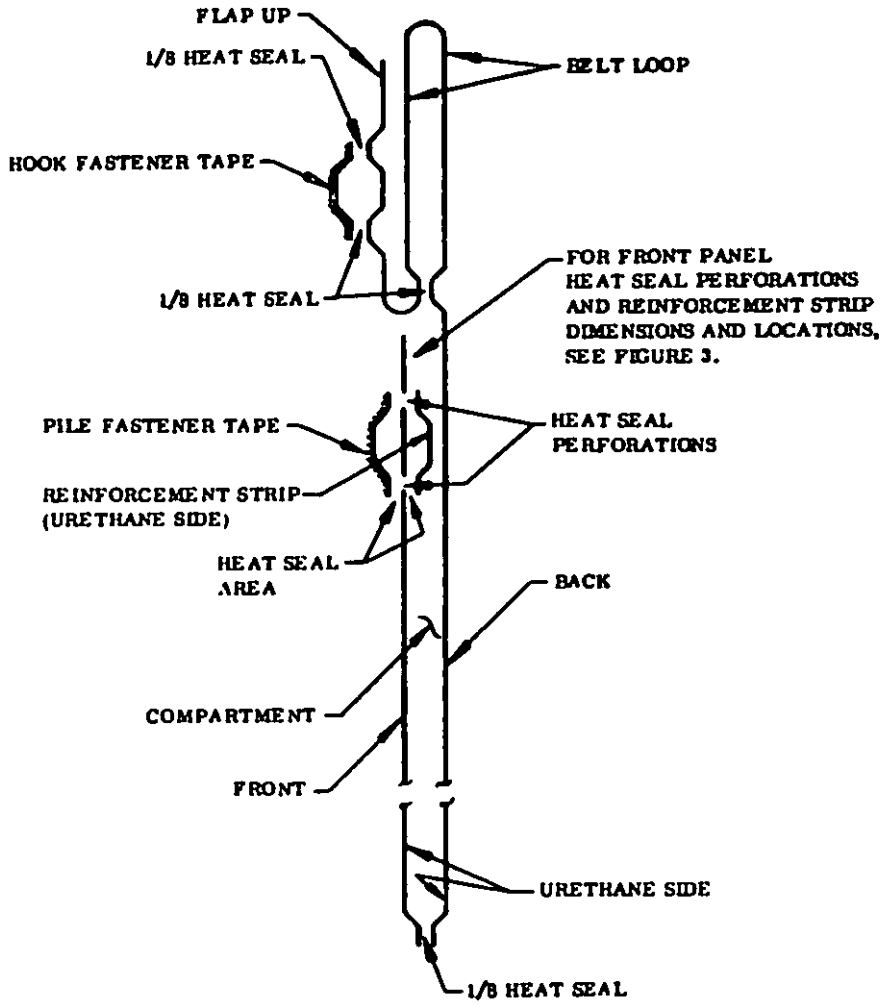


SECTION B-B

DIMENSIONS IN INCHES.
UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE AS SPECIFIED IN FIGURE 1.

FIGURE 2. Outer carrying bag sections


Source: https://assist.dla.mil -- Downloaded: 202610-26T04:38Z
Check the source to verify that this is the currentversion before use.

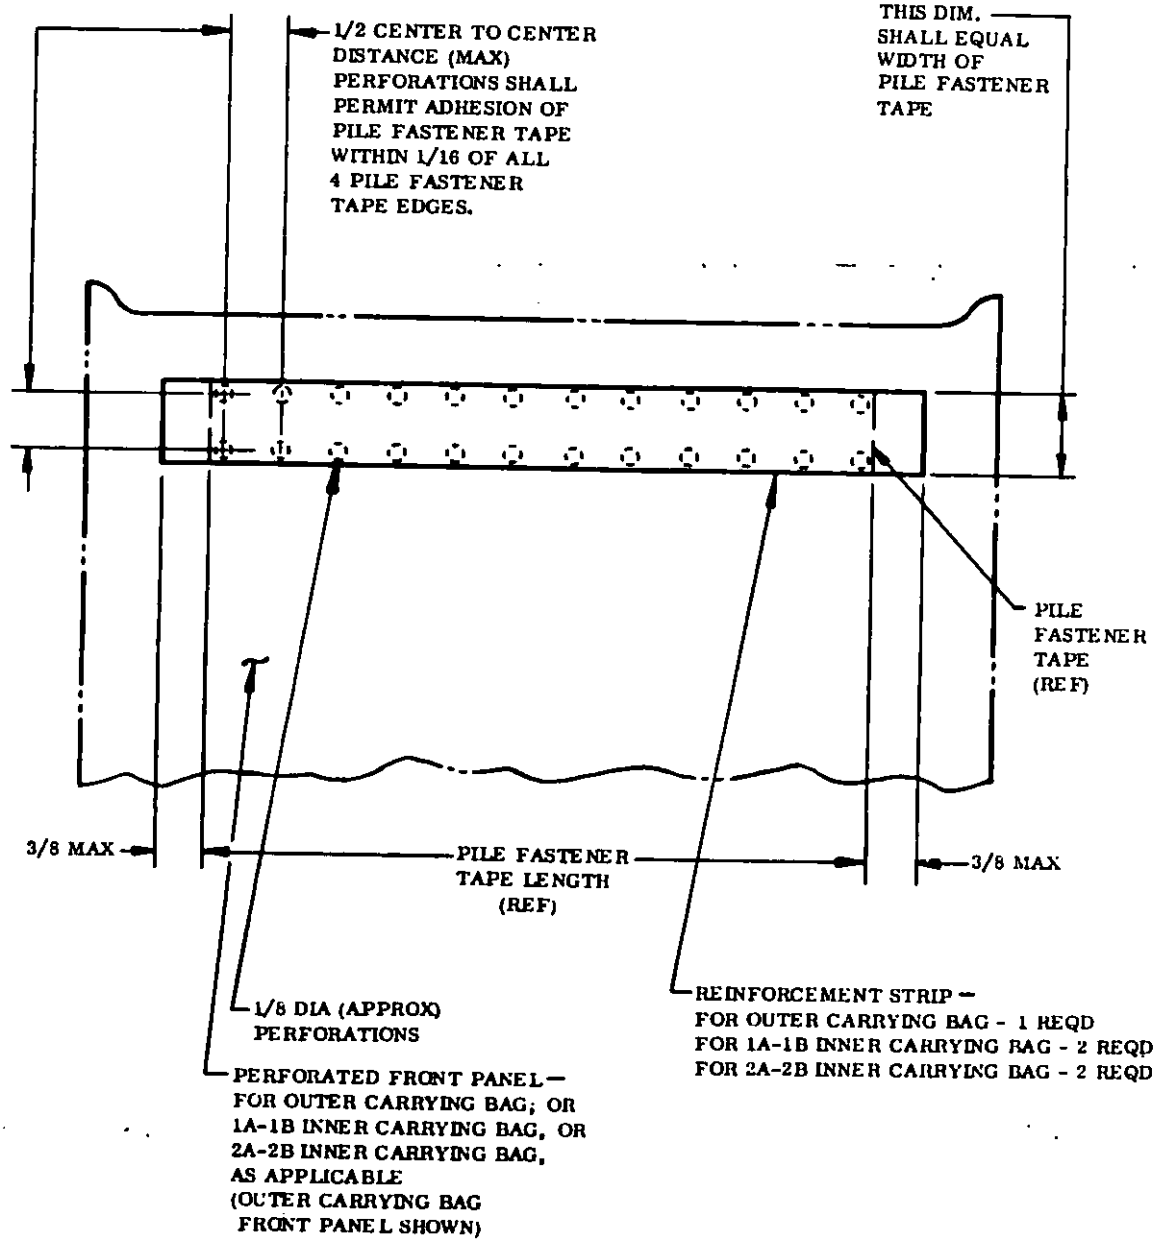

DIMENSIONS IN INCHES.
UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE AS SPECIFIED IN FIGURE 1.

FIGURE 3. Perforated front panels and reinforcement strips

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:38Z
Check the source to verify that this is the current version before use.

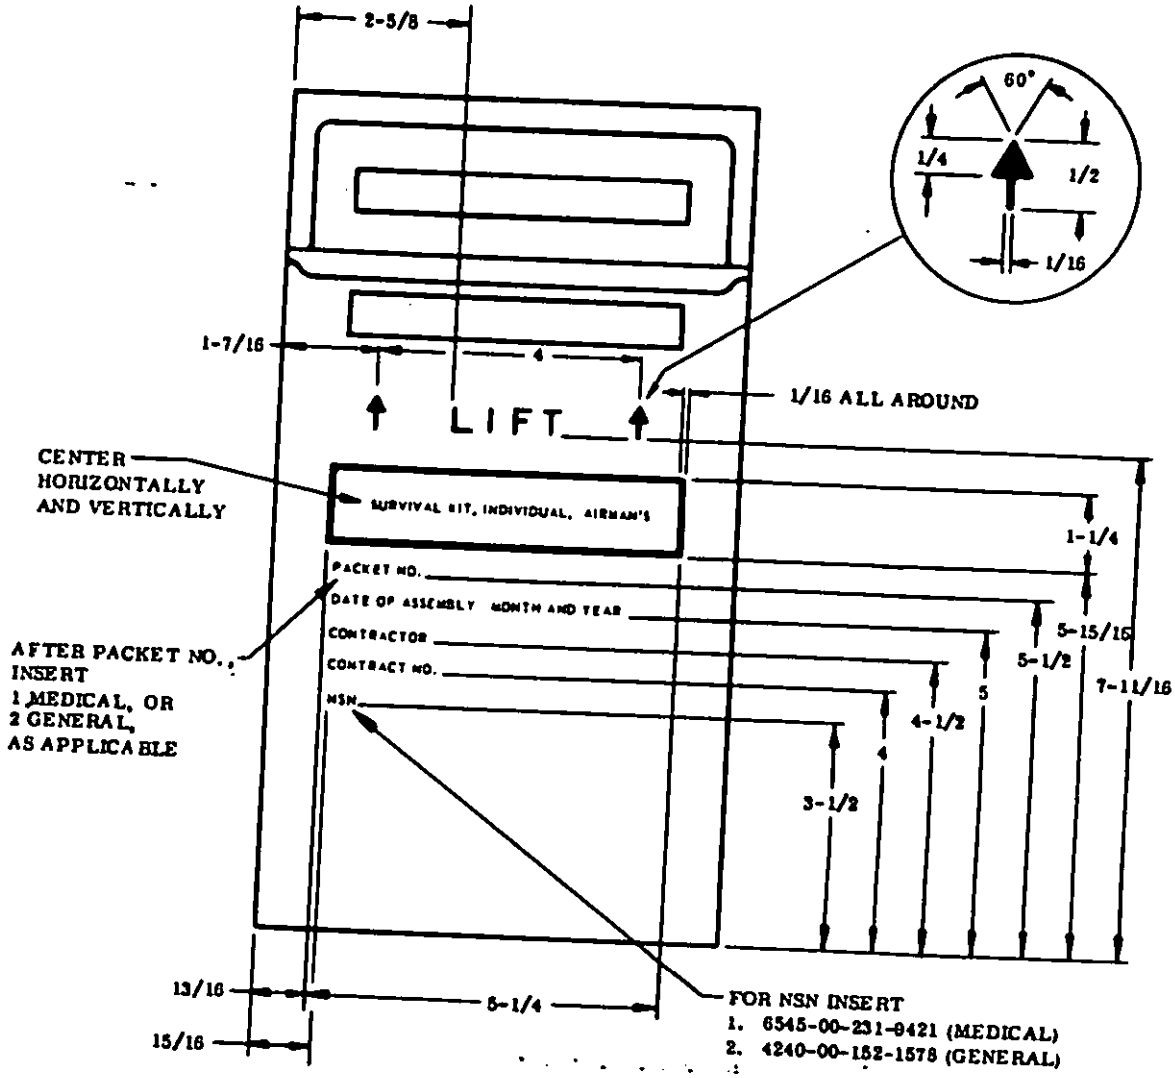


DIMENSIONS IN INCHES.
UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE AS SPECIFIED IN FIGURE 1.

EXCEPT FOR "LIFT", THE MARKINGS SHALL BE NEWS GOTHIC 14 POINT. "LIFT" SHALL BE NEWS GOTHIC 36 POINT.

FIGURE 4. Outer carrying bag markings

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:38Z
Check the source to verify that this is the current version before use.

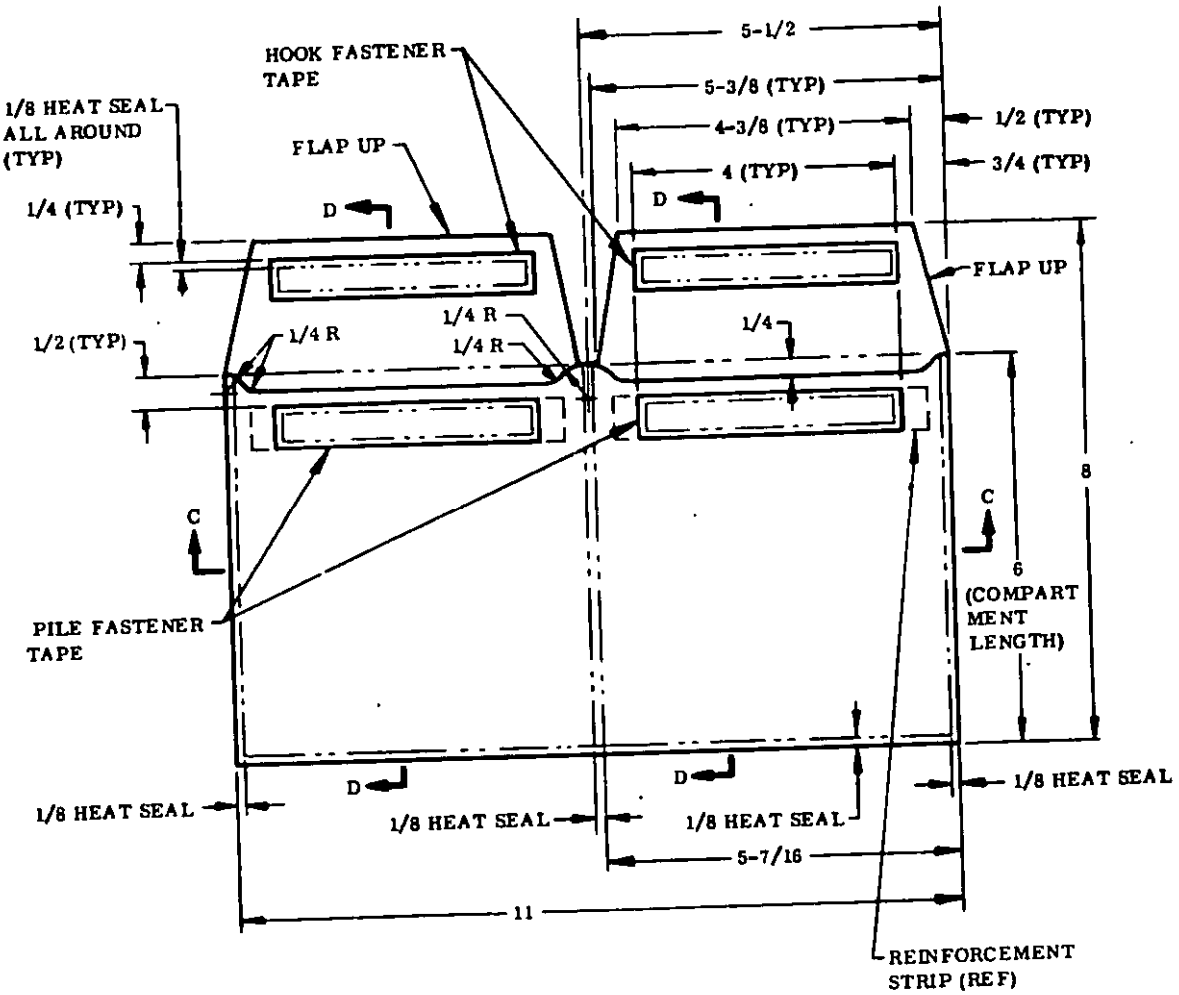


DIMENSIONS IN INCHES.
UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE AS SPECIFIED IN FIGURE 1.

FOR SECTIONS C-C AND D-D, SEE FIGURE 7.
FOR MARKINGS SEE FIGURE 8.
FOR HEAT SEAL PERFORATIONS (FRONT PANEL) AND REINFORCEMENT STRIP, SEE FIGURES 3 AND 7.

FIGURE 5. 1A-1B inner carrying bag

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:38Z
Check the source to verify that this is the current version before use.

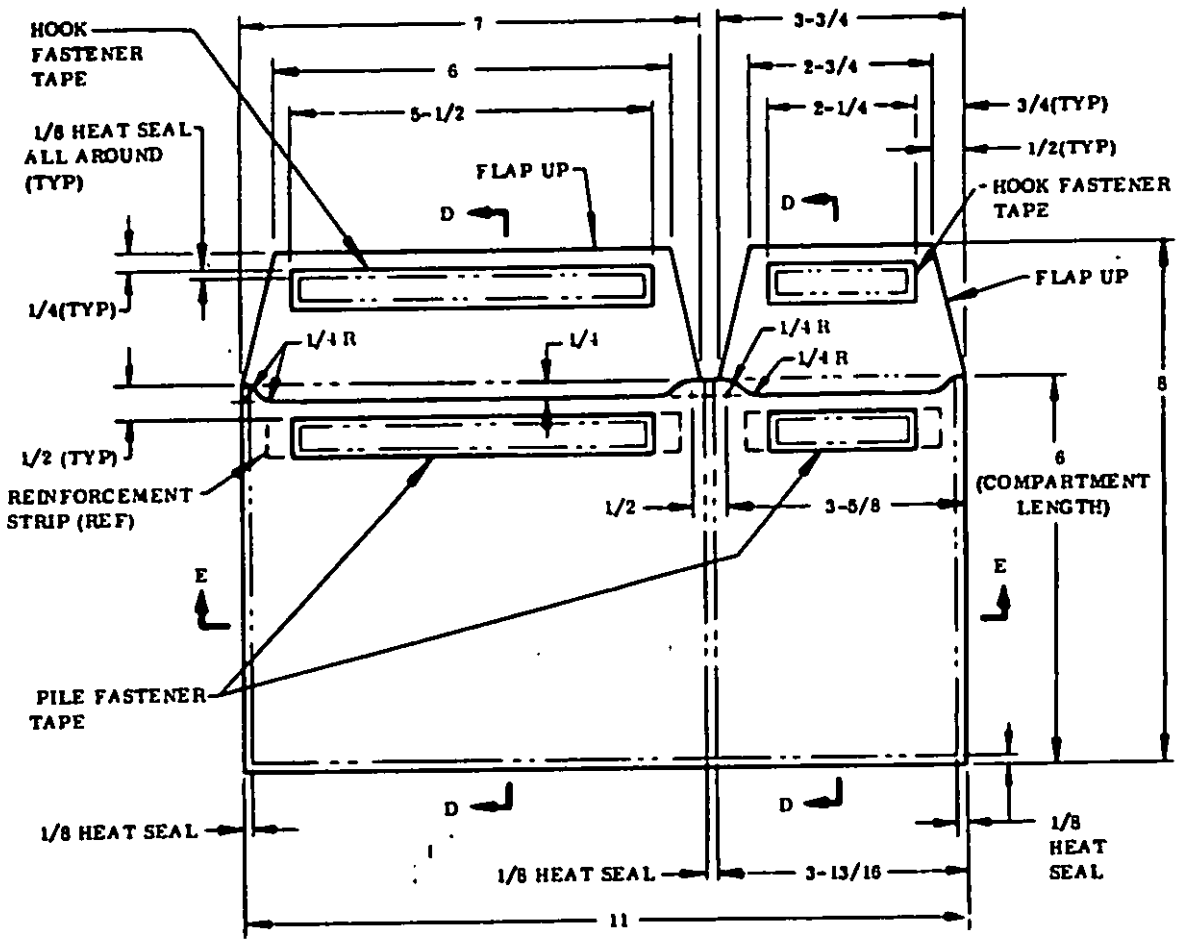


DIMENSIONS IN INCHES.
UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE AS SPECIFIED IN FIGURE 1.


FOR SECTIONS D-D AND E-E, SEE FIGURE 7.
FOR MARKINGS SEE FIGURE 9.
FOR HEAT SEAL PERFORATIONS (FRONT PANEL) AND REINFORCEMENT STRIP, SEE FIGURES 3 AND 7.

FIGURE 6. 2A-2B inner carrying bag


Source: https://assist.dla.mil -- Downloaded: 202610-26T04:38Z
Check the source to verify that this is the currentversion before use.

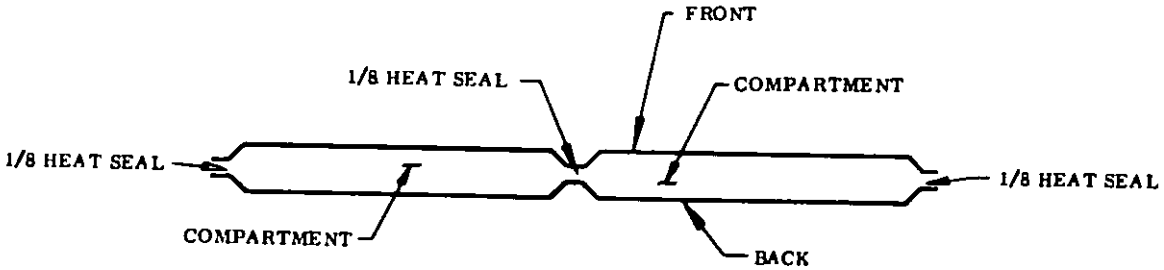

SECTION C-C
(1A-1B INNER CARRYING BAG)

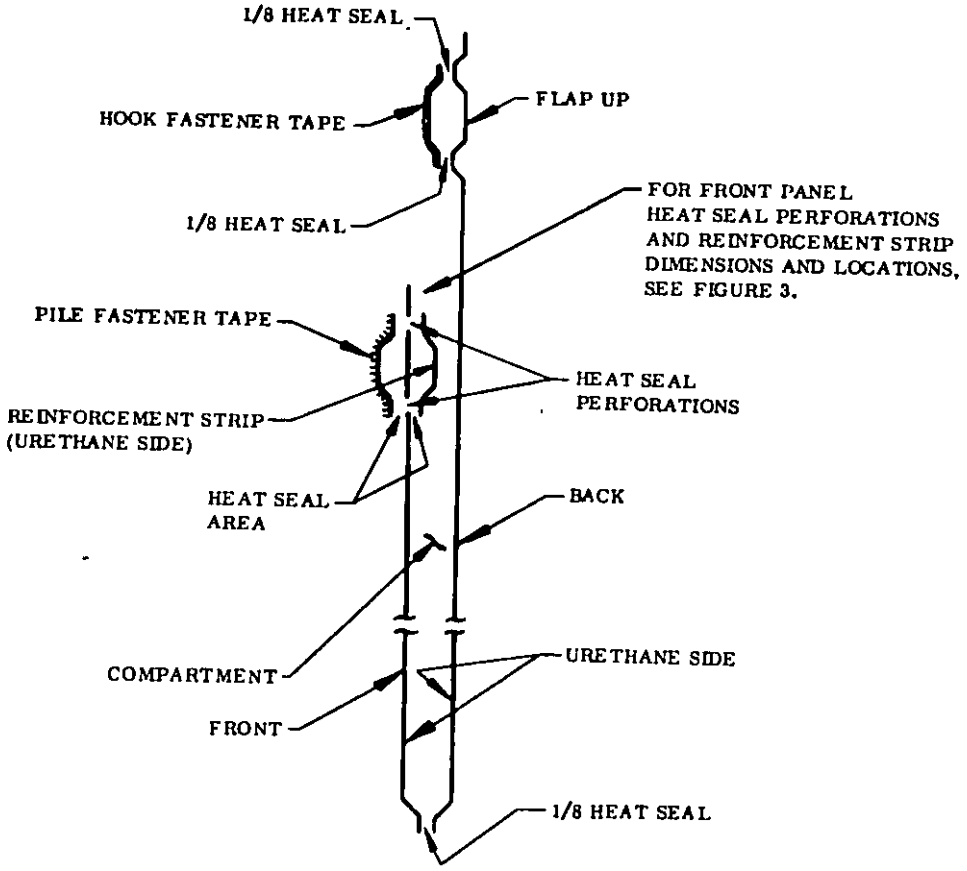

SECTION D-D
(1A-1B AND 2A-2B INNER CARRYING BAGS)

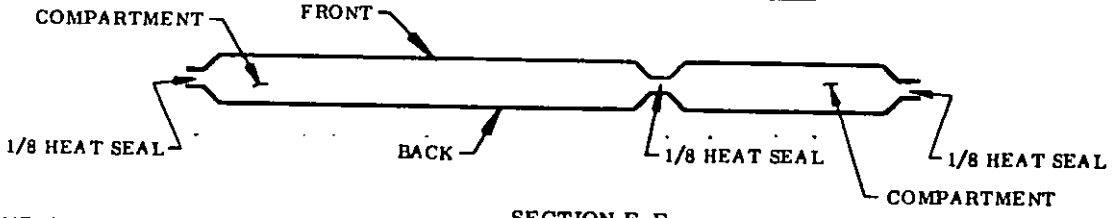


SECTION E-E
(2A-2B INNER CARRYING BAG)

DIMENSIONS IN INCHES.
UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE AS SPECIFIED IN FIGURE 1.

FIGURE 7. 1A-1B and 2A-2B inner carrying bag sections


Source: https://assist.dla.mil -- Downloaded: 202610-26T04:38Z
Check the source to verify that this is the current version before use.

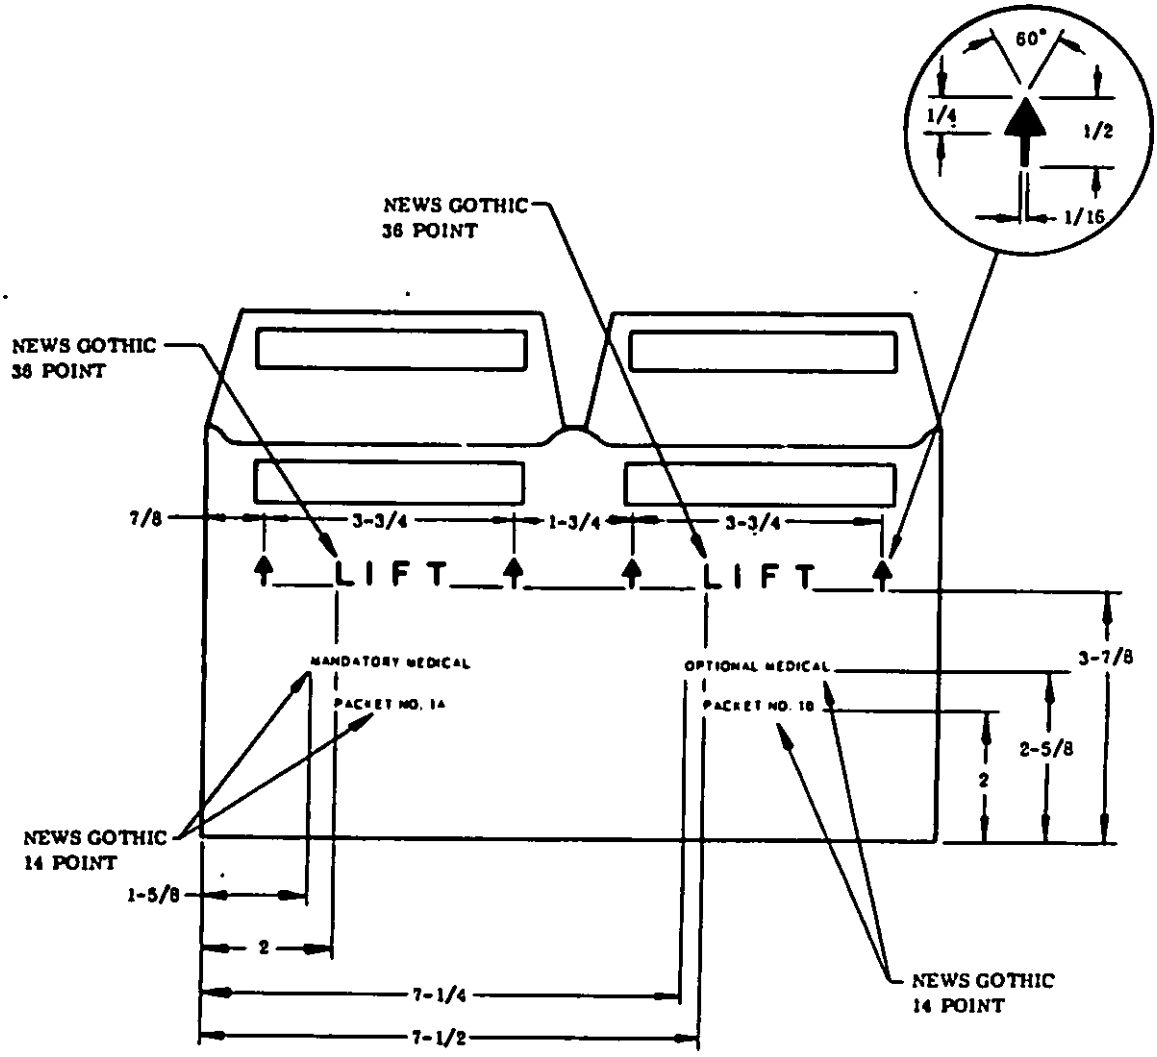

DIMENSIONS IN INCHES.
UNLESS OTHERWISE SPECIFIED,
TOLERANCES SHALL BE AS
SPECIFIED IN FIGURE 1.

FIGURE 8. 1A-1B inner carrying bag markings


Source: https://assist.dla.mil -- Downloaded: 202610-26T04:38Z
Check the source to verify that this is the current version before use.

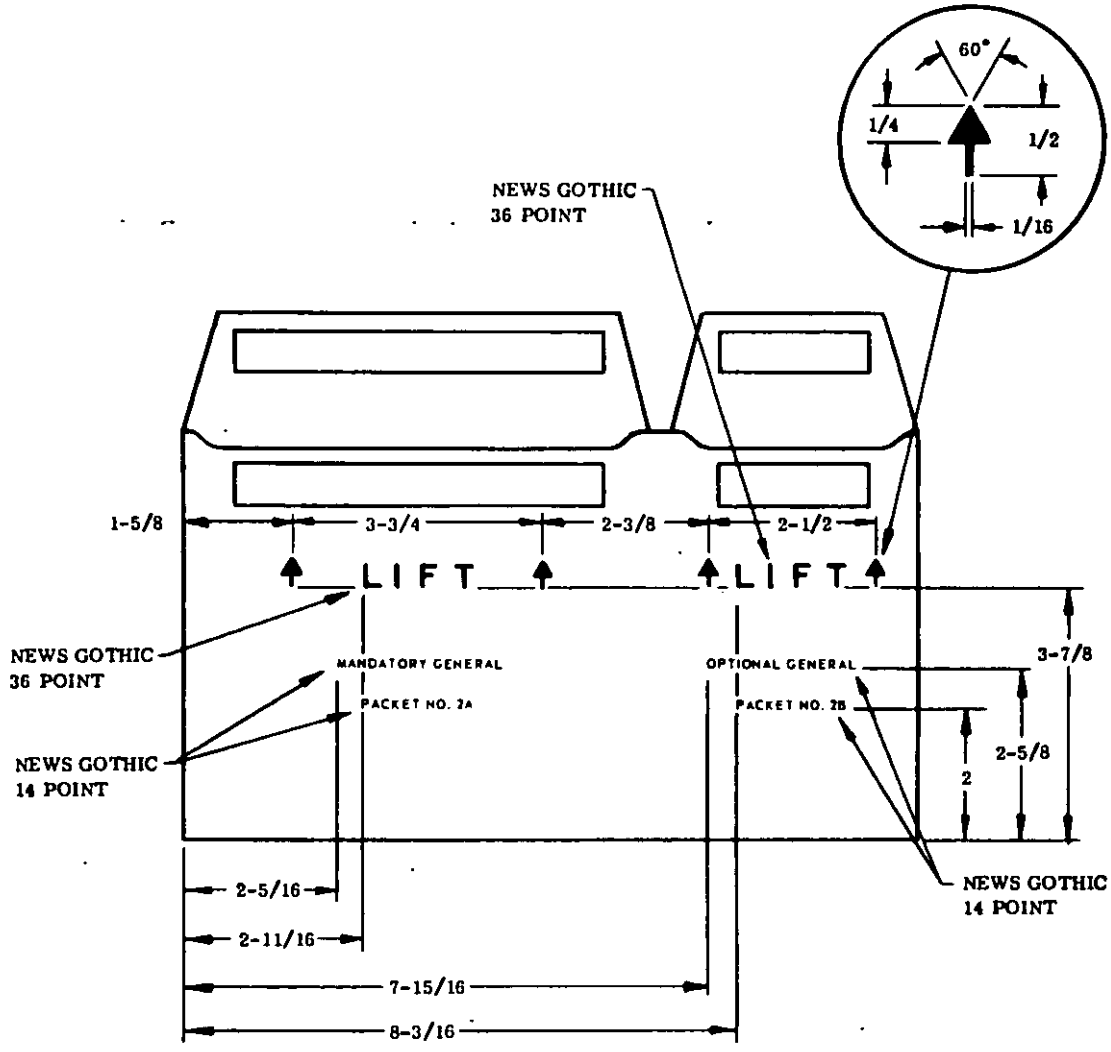

DIMENSIONS IN INCHES.
UNLESS OTHERWISE SPECIFIED,
TOLERANCES SHALL BE AS
SPECIFIED IN FIGURE 1.

FIGURE 9. 2A-2B inner carrying bag markings

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:38Z
Check the source to verify that this is the current version before use.

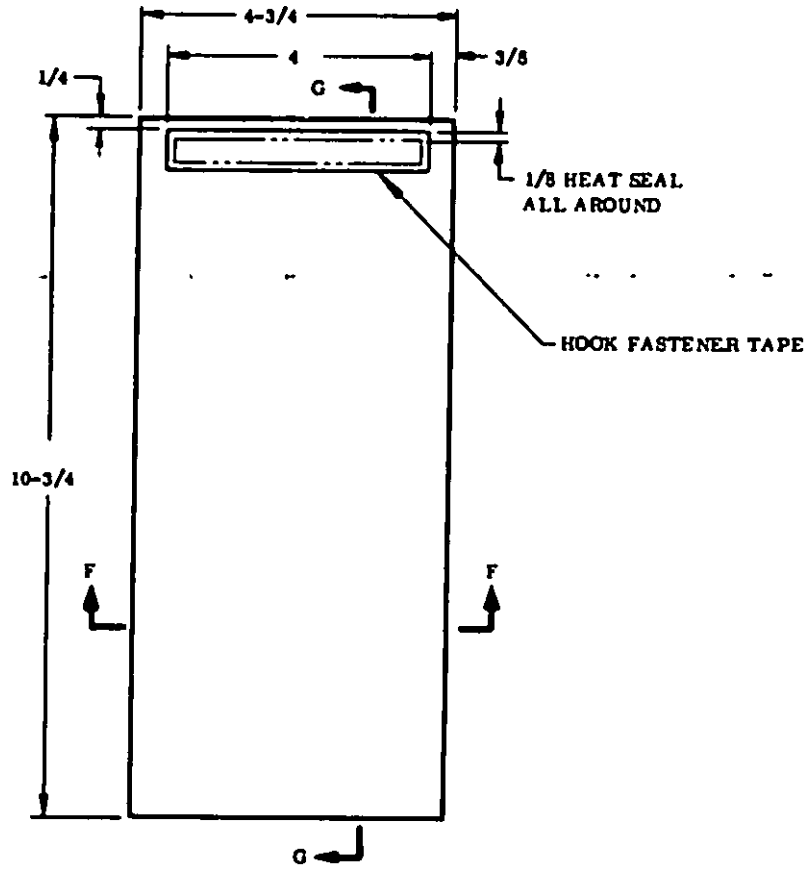


DIMENSIONS IN INCHES.
UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE AS SPECIFIED IN FIGURE 1.

FOR SECTIONS F-F AND G-G, SEE FIGURE 13.

FIGURE 10. 1A-1B packet bag

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:38Z
Check the source to verify that this is the current version before use.

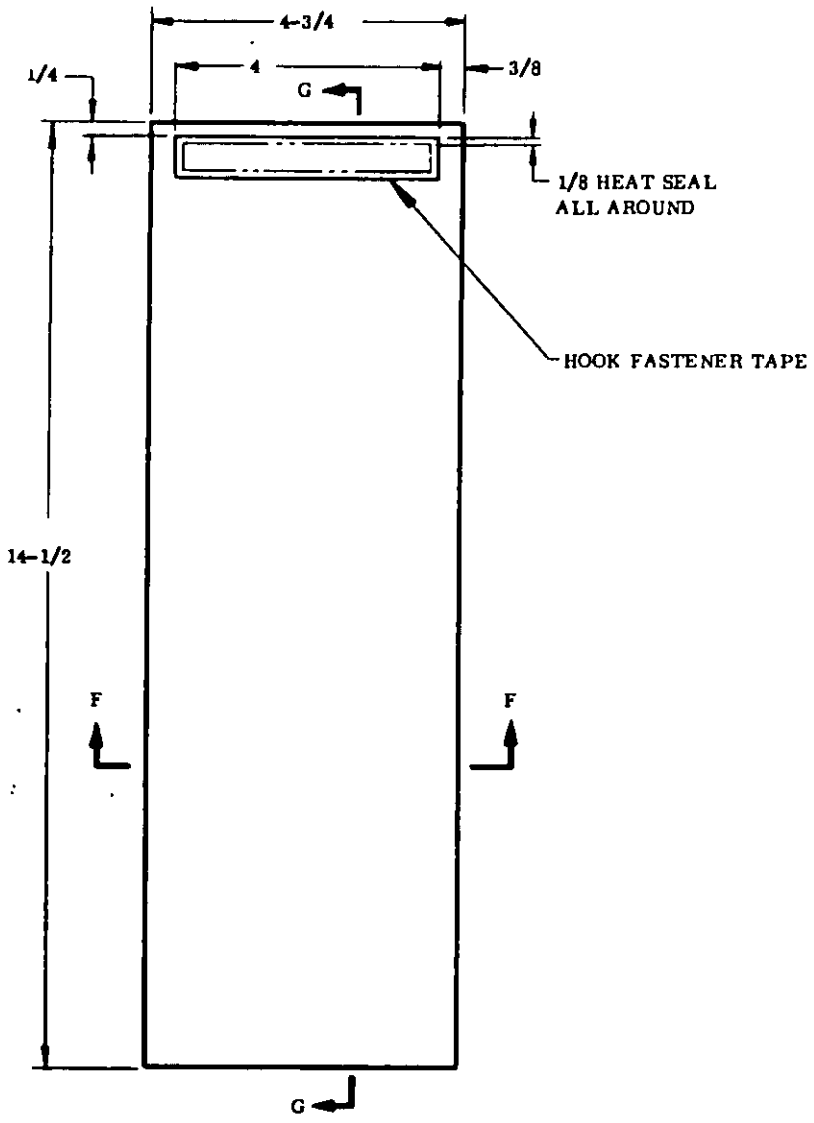


DIMENSIONS IN INCHES.
UNLESS OTHERWISE SPECIFIED,
TOLERANCES SHALL BE AS
SPECIFIED IN FIGURE 1.

FOR SECTIONS F-F AND G-G, SEE FIGURE 13.

FIGURE 11. 2A packet bag

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:38Z
Check the source to verify that this is the current version before use.

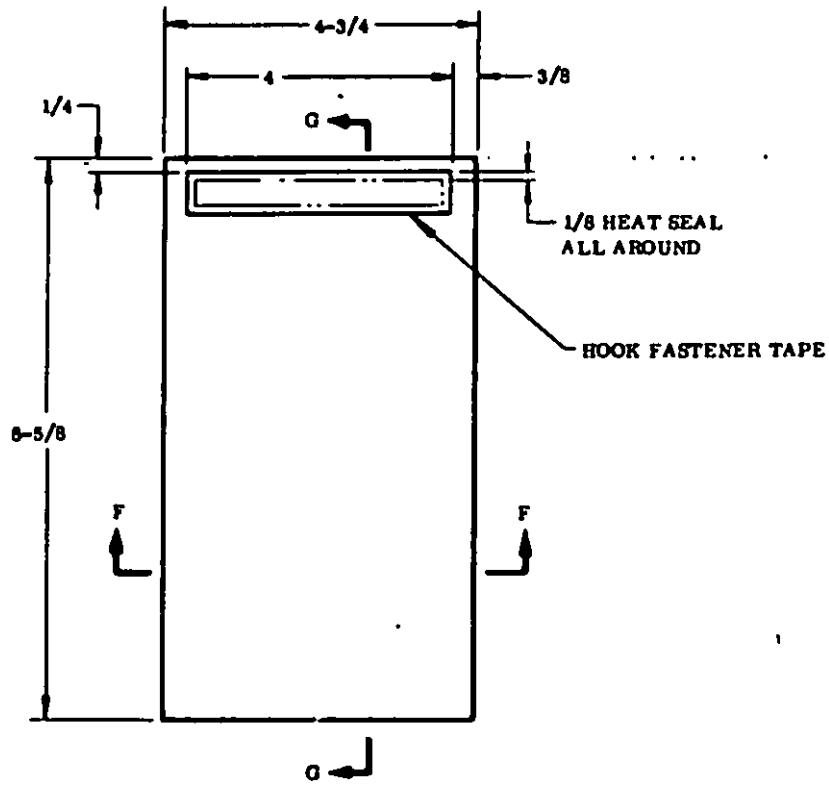


DIMENSIONS IN INCHES.
UNLESS OTHERWISE SPECIFIED,
TOLERANCES SHALL BE AS
SPECIFIED IN FIGURE 1.


FOR SECTIONS F-F AND G-G, SEE FIGURE 13.

FIGURE 12. 2B packet bag

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:38Z
Check the source to verify that this is the current version before use.

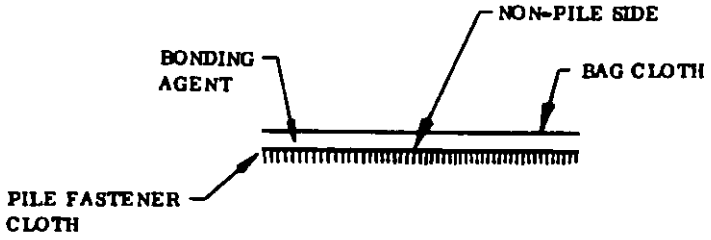

SECTION F-F

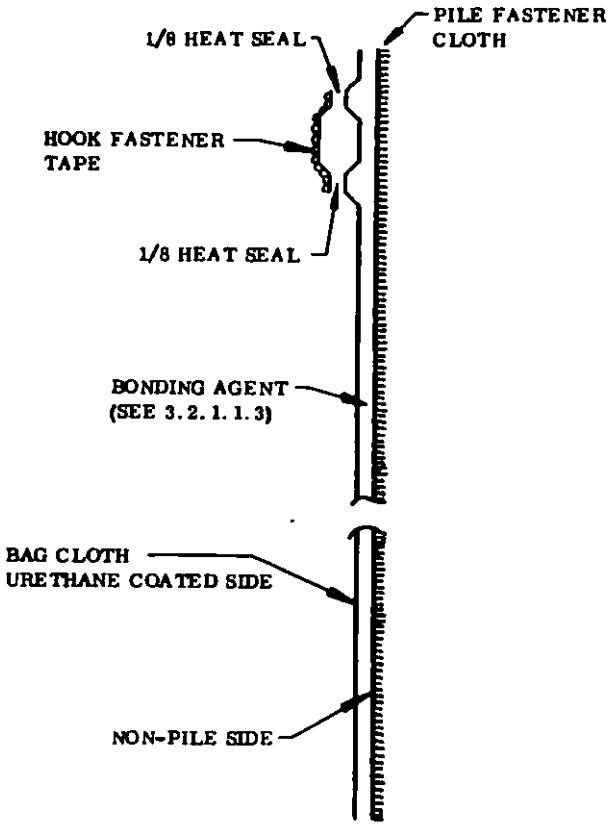


SECTION G-G

DIMENSIONS IN INCHES.
UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE AS SPECIFIED IN FIGURE 1.

FIGURE 13. 1A-1B and 2A-2B packet bag sections

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:38Z
Check the source to verify that this is the current version before use.

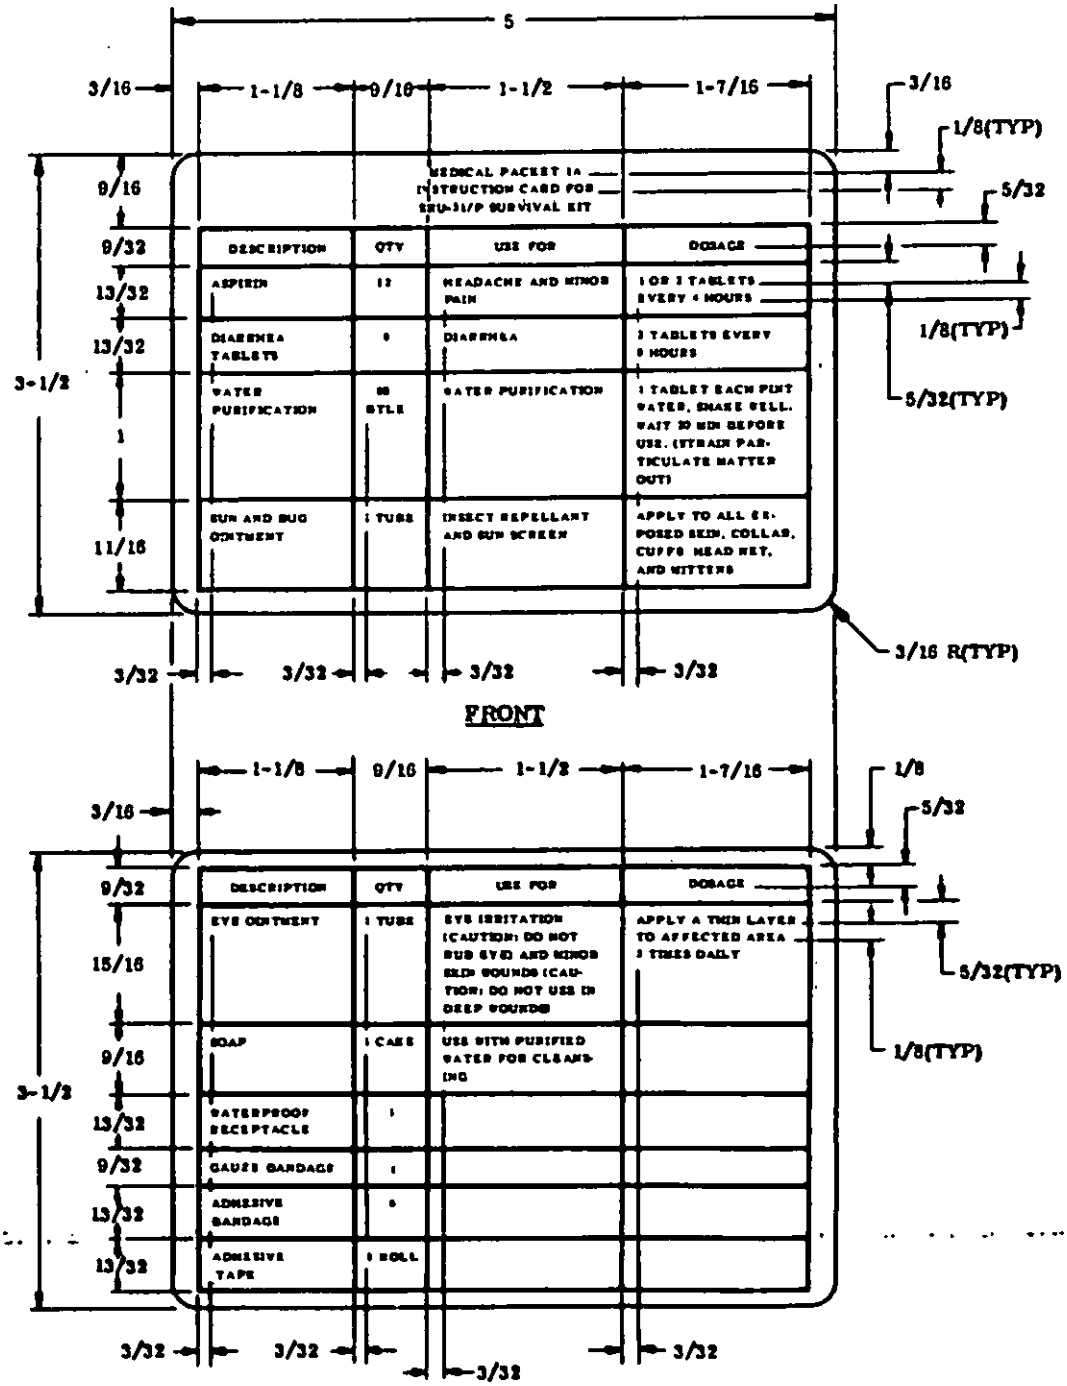


DIMENSIONS IN INCHES.
UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE AS SPECIFIED IN FIGURE 1.

ALL MARKINGS SHALL BE NEWS GOTHIC, 6 POINT. ALL COLUMN HEADS SHALL BE CENTERED WITHIN COLUMNS AS SHOWN.

FIGURE 14. Medical packet 1A instruction card

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:38Z
Check the source to verify that this is the current version before use.

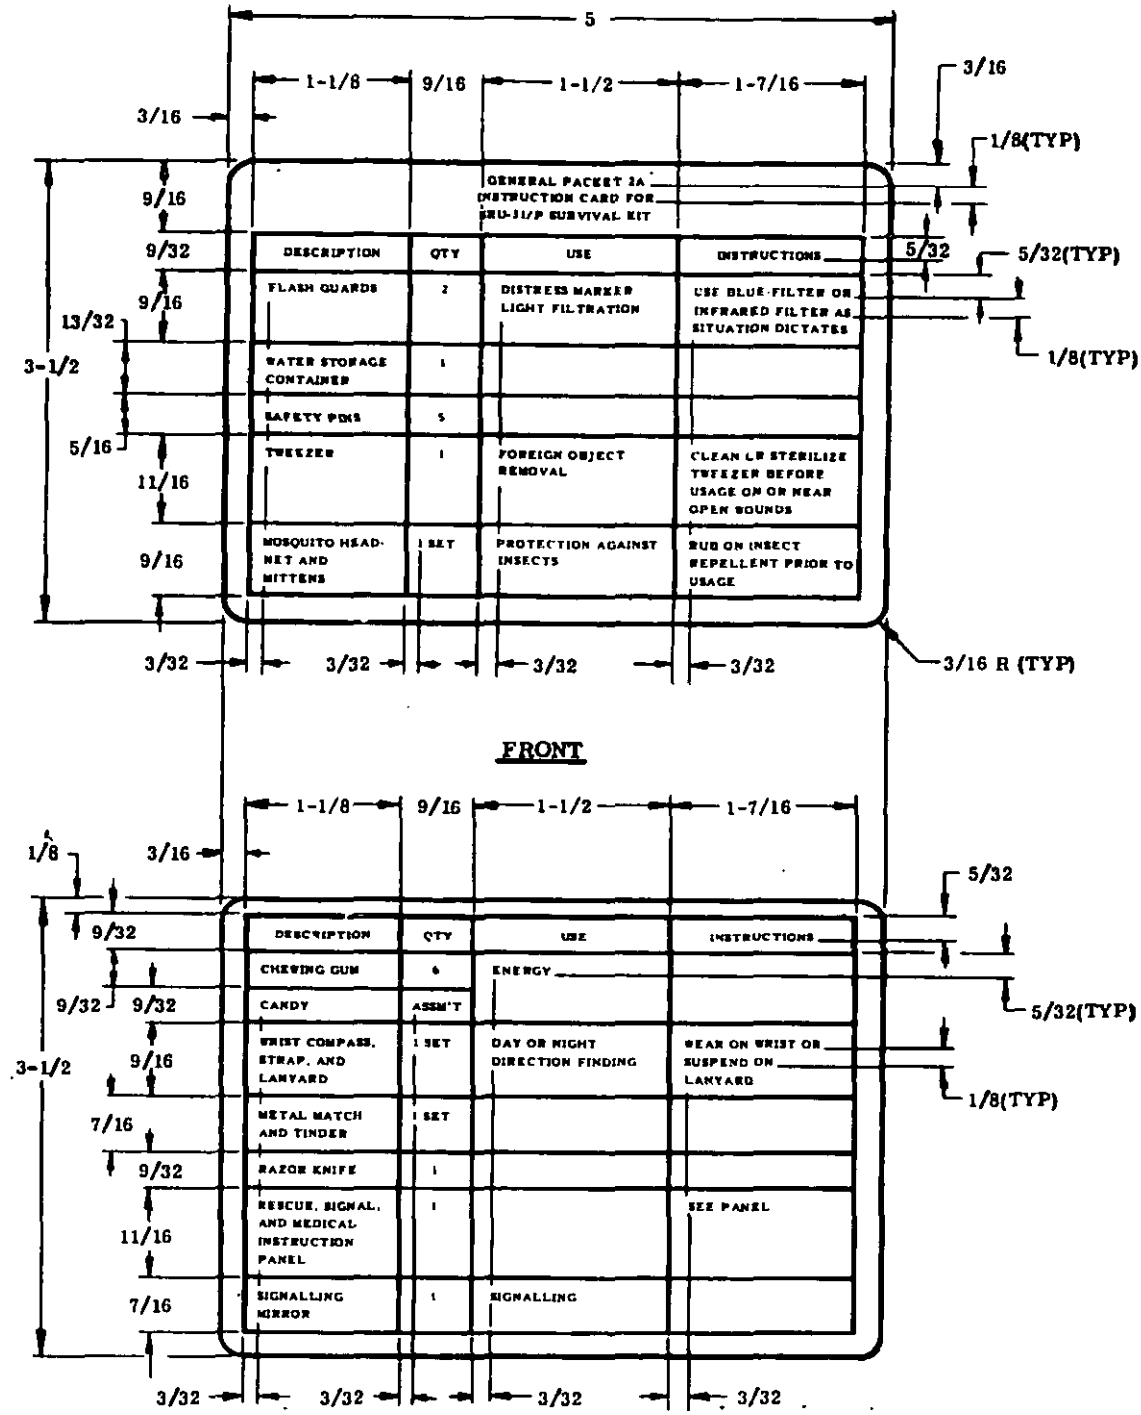


DIMENSIONS IN INCHES.
UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE AS SPECIFIED IN FIGURE 1.

BACK

ALL MARKINGS SHALL BE NEWS GOTHIC, 6 POINT. ALL COLUMN HEADS SHALL BE CENTERED WITHIN COLUMNS AS SHOWN.

FIGURE 15. General packet 2A instruction card


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:38Z
Check the source to verify that this is the current version before use.

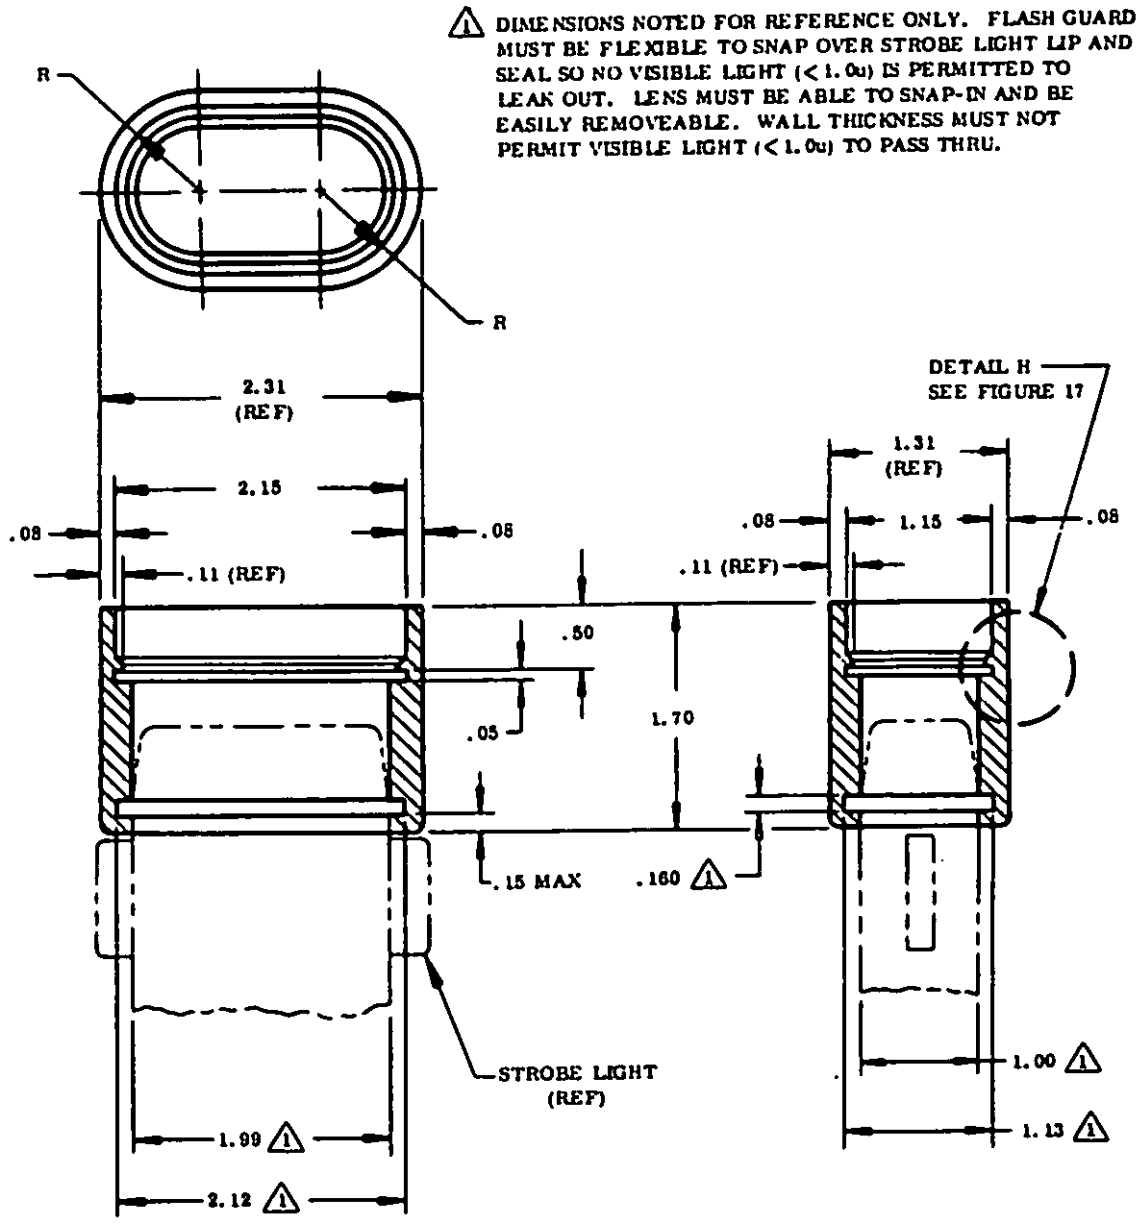

DIMENSIONS IN INCHES. DECIMAL DIMENSIONS	TOLERANCES
2 PLACE	±.01
3 PLACE	±.005
ANGULAR°	±1/2°

FIGURE 16. Flash guard

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:38Z
Check the source to verify that this is the current version before use.

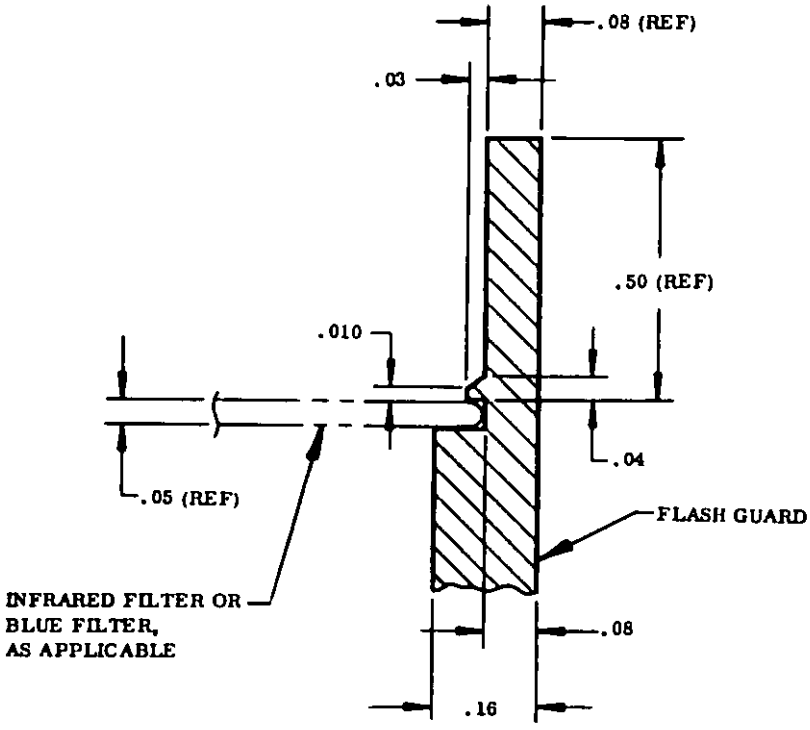


DETAIL H

DIMENSIONS IN INCHES. DECIMAL DIMENSIONS	TOLERANCES
2 PLACE	±.01
3 PLACE	±.005
ANGULAR°	±1/2°

FIGURE 17. Flash guard with filters shown in position

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:38Z
Check the source to verify that this is the current version before use.

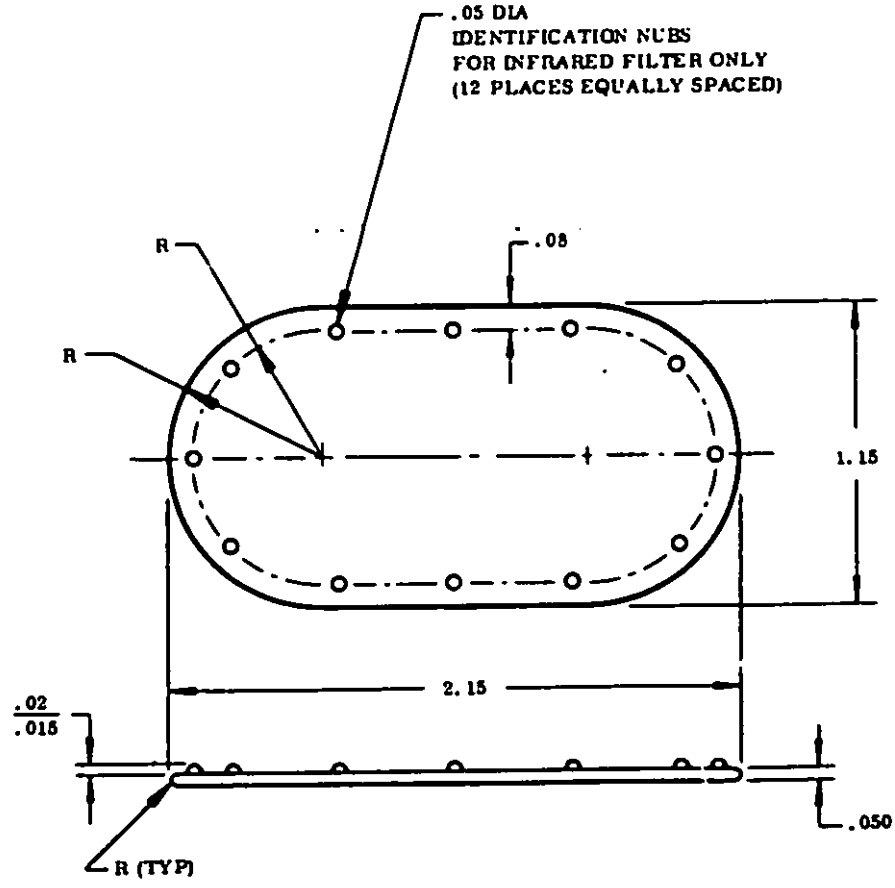


INFRARED FILTER
BLUE FILTER

DIMENSIONS IN INCHES. DECIMAL DIMENSIONS	TOLERANCES
2 PLACE	±.01
3 PLACE	±.005

FIGURE 18. Infrared and blue filters

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:38Z
Check the source to verify that this is the current version before use.

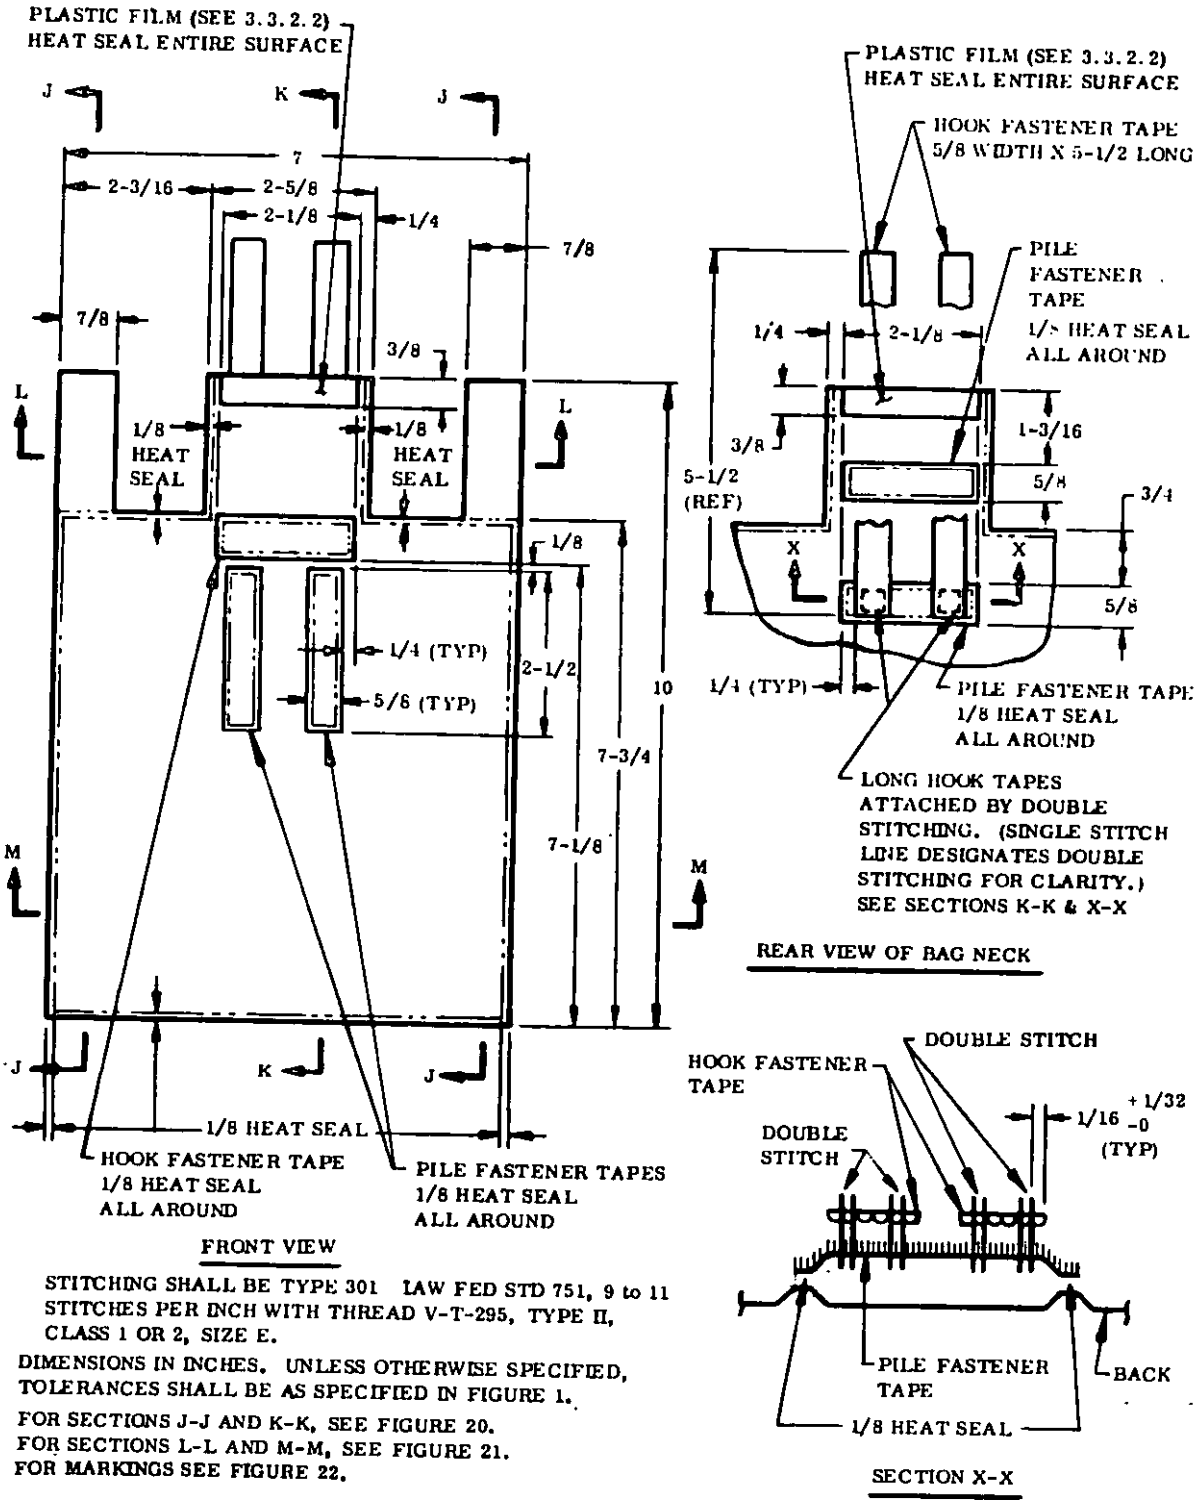


STITCHING SHALL BE TYPE 301 LAW FED STD 751, 9 to 11 STITCHES PER INCH WITH THREAD V-T-295, TYPE II, CLASS 1 OR 2, SIZE E.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE AS SPECIFIED IN FIGURE 1.

FOR SECTIONS J-J AND K-K, SEE FIGURE 20.
FOR SECTIONS L-L AND M-M, SEE FIGURE 21.
FOR MARKINGS SEE FIGURE 22.

FIGURE 19. Water storage bag


Source: https://assist.dla.mil -- Downloaded: 202610-26T04:38Z
Check the source to verify that this is the current version before use.

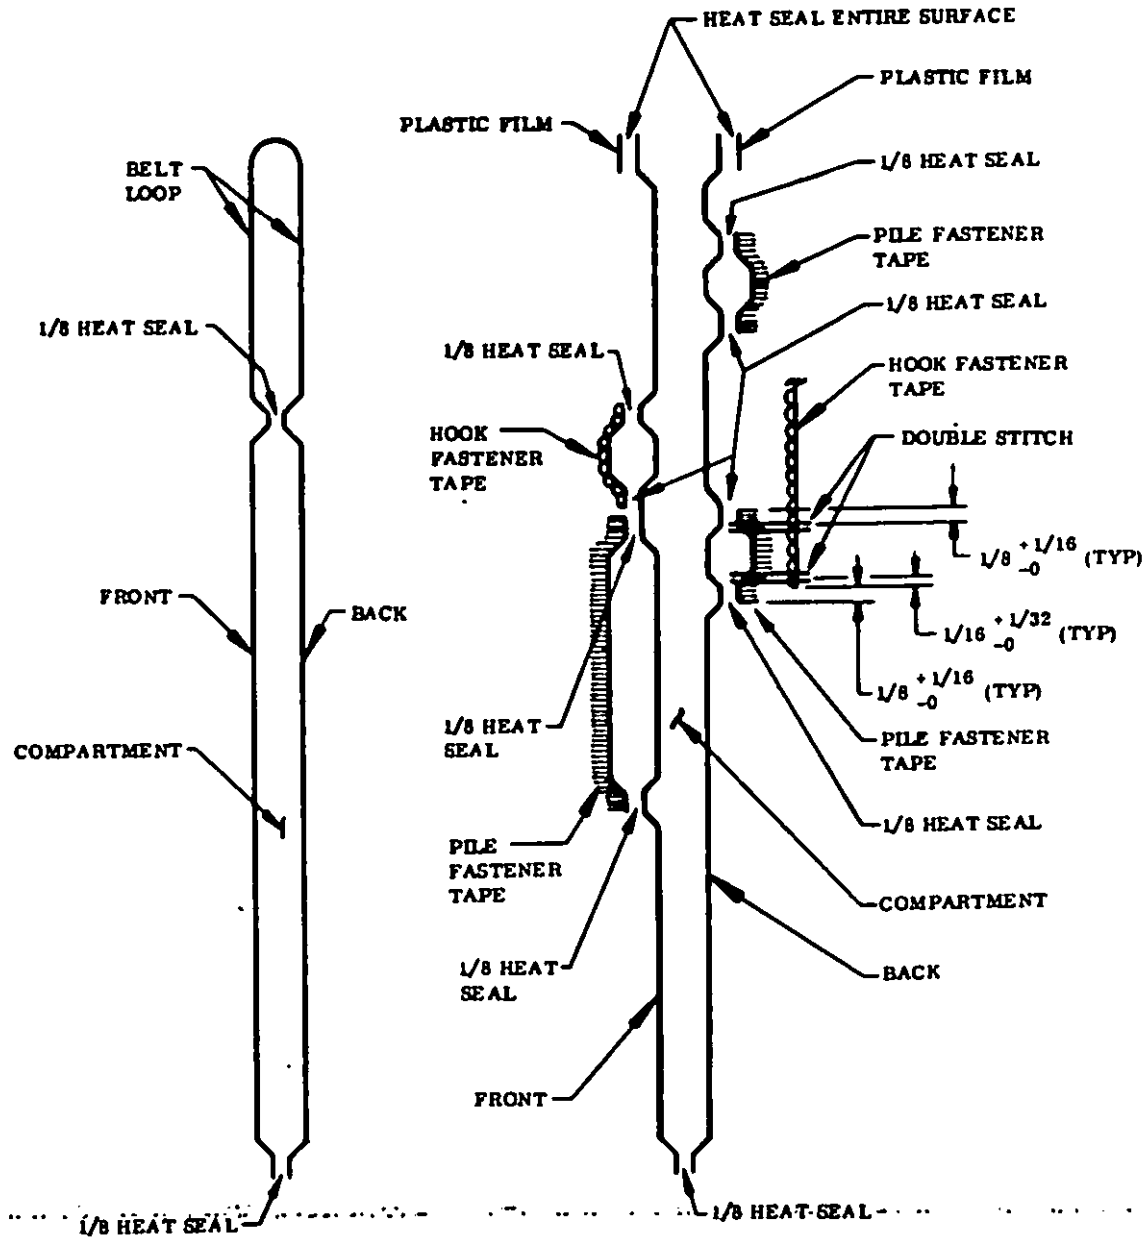


DIMENSIONS IN INCHES.
UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE AS SPECIFIED IN FIGURE 1.

FIGURE 20. Water storage bag sections

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:38Z
Check the source to verify that this is the current version before use.

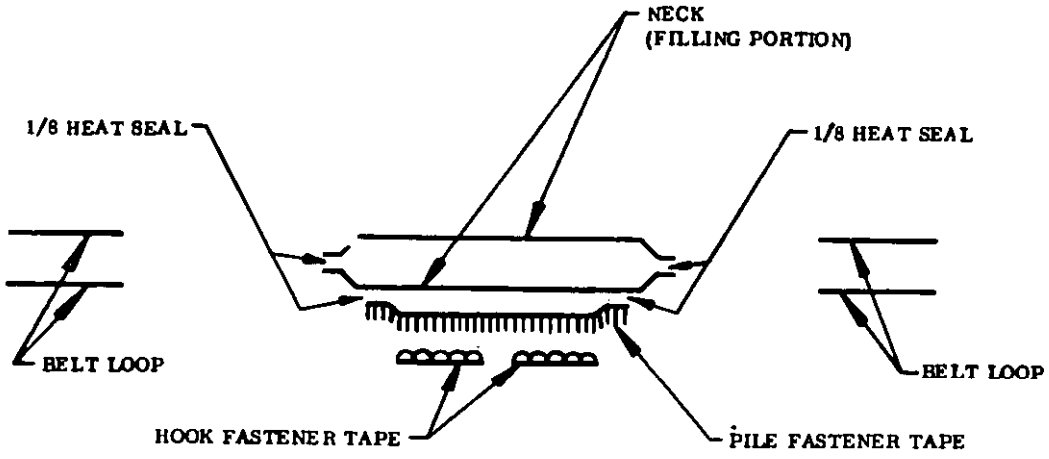

SECTION L-L

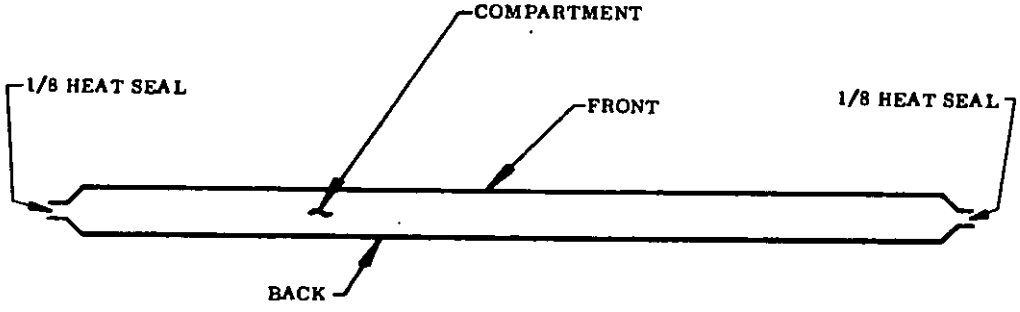


SECTION M-M

DIMENSIONS IN INCHES.
UNLESS OTHERWISE SPECIFIED,
TOLERANCES SHALL BE AS
SPECIFIED IN FIGURE 1.

FIGURE 21. Water storage bag sections

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:38Z
Check the source to verify that this is the current version before use.

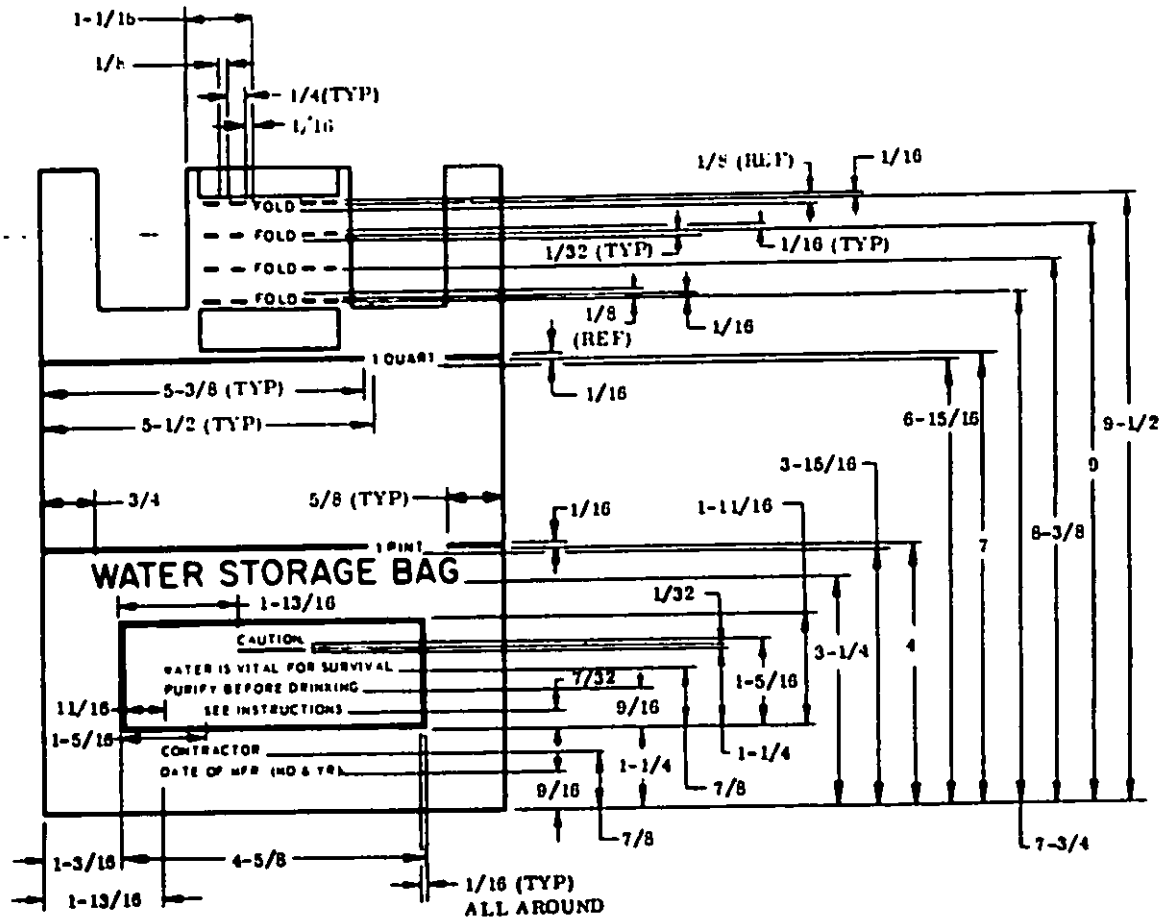


EXCEPT FOR "WATER STORAGE BAG", THE MARKINGS SHALL BE NEWS GOTHIC 14 POINT. "WATER STORAGE BAG" SHALL BE NEWS GOTHIC 36 POINT.

DIMENSIONS IN INCHES.
UNLESS OTHERWISE SPECIFIED,
TOLERANCES SHALL BE AS
SPECIFIED IN FIGURE 1.

FIGURE 22. Water storage bag markings


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:38Z
Check the source to verify that this is the current version before use.

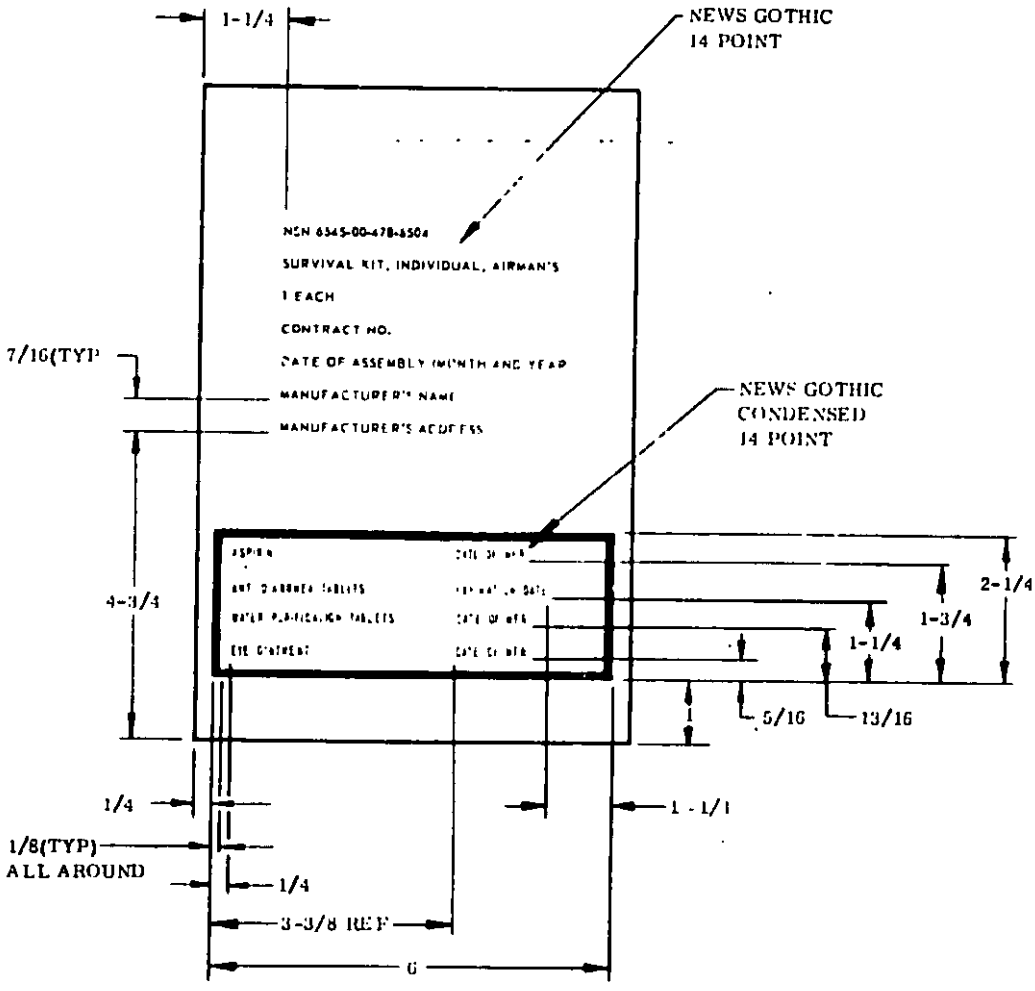

DIMENSIONS IN INCHES.
UNLESS OTHERWISE SPECIFIED,
TOLERANCES SHALL BE AS
SPECIFIED IN FIGURE 1.

FIGURE 23. Folding box markings - complete kit


Source: https://assist.dla.mil -- Downloaded: 202610-26T04:38Z
Check the source to verify that this is the current version before use.

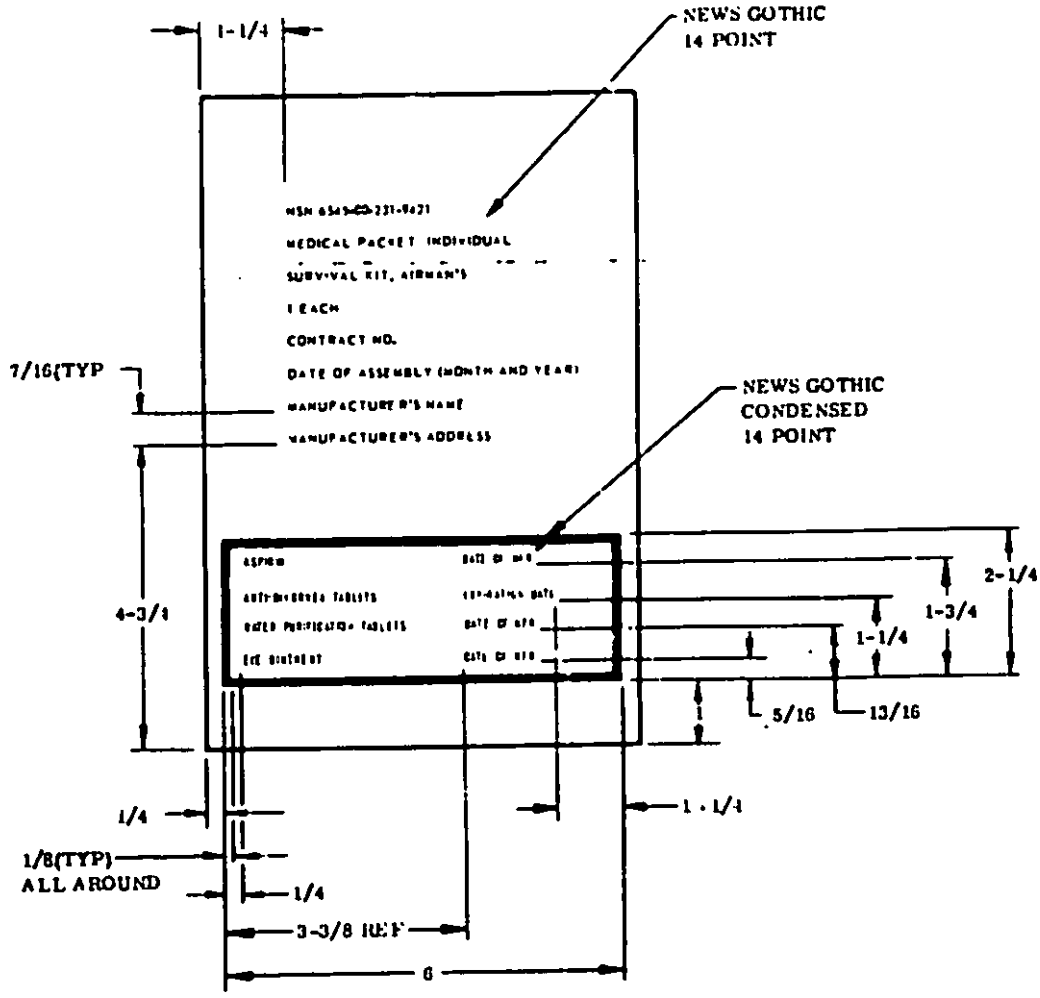

DIMENSIONS IN INCHES.
UNLESS OTHERWISE SPECIFIED,
TOLERANCES SHALL BE AS
SPECIFIED IN FIGURE 1.

FIGURE 24. Folding box markings - medical packet

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:38Z
Check the source to verify that this is the currentversion before use.

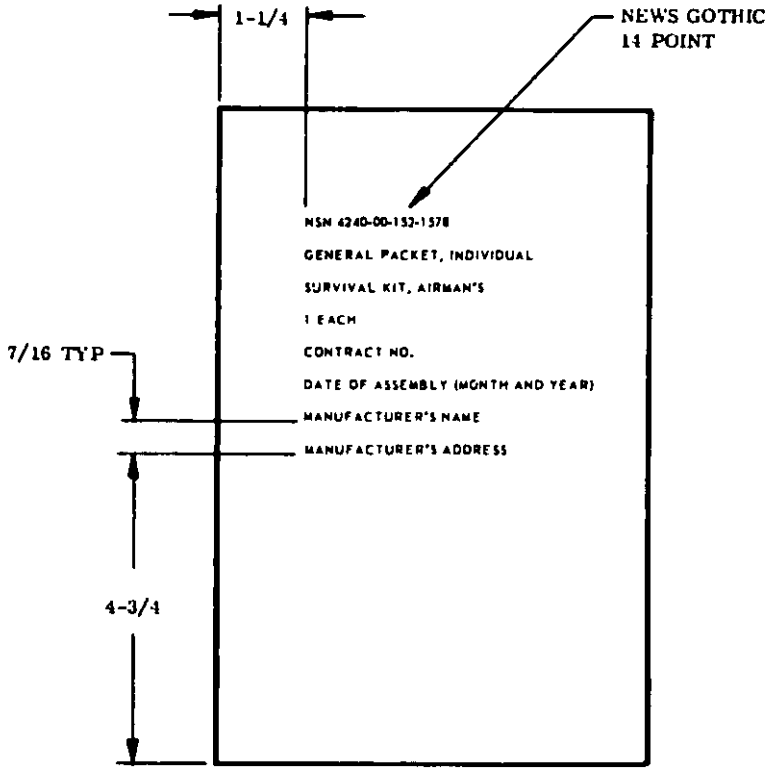

DIMENSIONS IN INCHES.
UNLESS OTHERWISE SPECIFIED
TOLERANCES SHALL BE AS
SPECIFIED IN FIGURE 1.

FIGURE 25. Folding box markings - general packet

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:38Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE
MIL-S-81941A(AS) SURVIVAL KIT, INDIVIDUAL, AIRMAN'S

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO (If "Yes", in what way?)

4. REMARKS

SUBMITTED BY (Printed or typed name and address - Optional)

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:38Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
Naval Air Engineering Center
Lakehurst, NJ 08733

OFFICIAL BUSINESS

POSTAGE AND FEES PAID
DEPARTMENT OF THE NAVY
DOD 316

Engineering Specifications and Standards Department (Code 93)
Naval Air Engineering Center
Lakehurst, NJ 08733

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:38Z
Check the source to verify that this is the current version before use.