MILITARY SPECIFICATION

TABARD: USMC BAND, EMBROIDERED

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers the requirements for one type and size scarlet wool broadcloth tabard, with fringe and tying cords, embroidered with the Unite States Marine Corps emblem.

2. APPLICABLE DOCUMENTS

*2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-T-276	- Thread, Cotton.

MILITARY

MIL-F-2310	- Fringe, Ornamental, Rayon.
MIL-B-17757	- Boxes, Fiber, Corrugated (Modular Sizes).
MIL-C-82252	- Cloth, Broadcloth, Wool And Wool Synthetic.

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods.
FED-STD-751	- Stitch, Seam and Stitching.

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

MIL-STD-129 - Marking for Shipment and Storage.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

*2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

UNIFORM CLASSIFICATION COMMITTEE. AGENT
Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

3. REQUIREMENTS

3.1 Samples. Samples are furnished solely for guidance and information to the supplier (see 6.3). Variation from this specification may appear in the sample, in which case the specification shall govern.

*3.2 First article. Unless otherwise specified (see 6.2), before production is commenced, the first article, consisting of the number of tabards specified by the procuring activity (see 6.2), shall be submitted or made available to the contracting officer or his authorized representative for approval. The approval of the first article authorizes the commencement of production but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The first article shall be manufactured by the supplier in the same facilities to be used for the manufacture of the production items.

3.3 Material.

*3.3.1 Basic material. The basic material shall be cloth, broadcloth, wool, scarlet shade 2501 (see 6.3), 16.5 ounce, conforming to type I, class 4, of MIL-C-82252.

*3.3.2 Buckram. The buckram for embroidering shall be a light, open weave, single ply fabric weighing 2.5 ounces minimum per square yard having a minimum thread count of 40 ends in the warp and 20 ends in the filling. The buckram shall have a minimum breaking strength of 30 pounds in the warp direction and 20 pounds in the filling direction when tested as specified in Section 4, Table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

*3.3.3 Fringe. The fringe shall be rayon, 1-1/2-inch length, conforming to class 1 of MIL-F-2310. The color of the fringe shall be old gold HE Cable No. 67105.

*3.3.4 Tying cords. The cords shall be constructed of two strands twisted together. Each strand shall have four ends of cotton thread as a core wound with sufficient ends of rayon yarn as a covering. The two strands shall be twisted together with 16 turns per inch. A length of the cord shall be doubled, with the cut ends to finish at the center of the doubled length, and the entire length of the doubled cord shall be twisted upon itself with six turns per inch, forming a finished tying cord not less than 12 inches in overall length. The color of the cotton and rayon yarns shall be old gold, HE, Cable No. 67105, and shall show good fastness to wet (dry) cleaning and light when tested as specified in Section 4, Table II.

*3.3.5 Thread.

*3.3.5.1 Rayon thread. The embroidery thread shall be continuous filament, regenerated cellulose (viscose or cuprammonium) type of rayon, 600 denier, single ply, minimum of 460 yards per ounce, and minimum breaking strength of 2.3 pounds. Embroidery threads shall match the approved standard shades (see 6.3), conforming to the following cable numbers for rayon thread:

White HA	Cable No. 67101
Scarlet HL	Cable No. 67111
Silver gray HAM	Cable No. 67137
Light blue HU	Cable No. 67120
Old gold HE	Cable No. 67105

The dyed threads shall show good fastness to wet (dry) cleaning and light when tested as specified in Section 4, Table II.

*3.3.5.2 Bobbin thread. Bobbin thread used in the embroidery shall be a good commercial grade of two-ply cotton yarn and when tested as specified in Section 4, Table II, shall comply with the requirements specified herein.

*3.3.5.3 Cotton thread. The thread for seaming and stitching shall be cotton, soft finish, ticket No. 40, three-ply, conforming to type IA3 of V-T-276. The thread for basting shall be a good commercial grade. This thread shall be dyed scarlet shade W. Cable No. 66040. The dyed thread shall show fastness to light and wet (dry) cleaning equal to or better than the standard sample. When no standard sample is available, the dyed thread shall show fair fastness to light and wet (dry) cleaning.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

*3.4 Design. The tabard shall be the Marine Corps design shown in Figure 1.

*3.5 Patterns. Standard patterns will be furnished to the supplier by the Government. The standard patterns shall not be altered in any way and shall be used only as a guide for cutting the supplier's working patterns. The standard patterns provide 1/4-inch seam allowance, except as otherwise specified in Table I.

*3.5.1 List of pattern parts. Tabard shall be cut from the material specified herein in accordance with the number of pattern parts indicated below:

Item	Pattern nomenclature Material: Cloth, Broadcloth, Wool	No. of cut parts
1.	Front and back part	2

3.6 Construction. The construction shall conform in all respects to Figure 1 and as specified herein. The tabard shall be made of two plies of basic material with each ply embroidered with the Marine Corps emblem, fringe at side and bottom edges, and two tying cords at top edge. The emblem shall be identically oriented on each side of the finished tabard as shown on the standard sample; that is, the emblem on both sides shall face toward the same end of the tabard.

3.6.1 Manufacturing requirements. Tabard shall be manufactured in accordance with the operations and the stitch, seam, and stitching types specified in Table I.

3.6.1.1 Operations. The supplier is not required to follow the exact sequence of the operations as listed in Table I but all operations specified shall be used to manufacture the tabard.

3.6.1.2 Stitches, seams, and stitching. The stitch, seam, and stitching types specified in Table I shall conform to FED-STD-751. The number of stitches per inch as specified in Table I indicates the minimum and maximum number permitted.

3.6.1.2.1 Ends of seams and stitching. Ends of seams and stitching (stitc type 301), when not caught in other seams or stitchings, shall be backtacke not less than 1/4 inch; thread breaks (all stitch types) shall be secured b stitching back of break not less than 1/2 inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

'N IO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
.	Cutting. a. Cut tabards in strict accordance with patterns furnished by the Government.					
.	Replacement of damaged parts. a. Replace at time of cutting any parts of the tabard containing holes or serious weakening defects such as smashes, multiple floats, loose weakening slubs, etc., expected to develop into holes, shade bars and dye streaks or unsightly slubs, etc. b. Replace any parts damaged during the manufacturing process by needle chews which may develop into a hole, scissor or knife cuts, tears, holes, mends or burns in the material.					
).	Make tabards. a. The Marine Corps emblem shall be embroidered in accordance with the standard sample (see Figure 2 for the location of colors). The stitch types, texture and density of the embroidered emblem shall conform in all respects to the standard sample. The thread colors of the emblem shall be as specified in 3.3.5. Embroidery work shall not be stiff but shall be soft and flexible in finish. Buckram shall be used as backing for reinforcing the stitches of the embroidered emblem. The emblem shall be identically oriented on each side of the finished tabard as shown in the standard sample; that is, the emblem on both sides shall face toward the same end of the tabard.					

Source: https://assist.dla.mil -- Downloaded: 20261O-26T04:39Z
Check the source to verify that this is the current version before use.

tied as open seams

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
4.	Assemble tabard.					
	a. Position the heading of the fringe on the outside of a single ply of basic material, even with the side and bottom edge. Stitch fringe to tabard 1/8 to 3/16 inch from the edge.	301	SSa-1	12-14	40/3	40/
	b. Position the two plies face to face with edges even. Stitch together at side and bottom edges 1/4 to 5/16 inch from raw edges, with the heading of fringe caught in the stitching.	301	SSa-1	12-14	40/3	40/
5.	Turn tabard.					
	a. Turn the tabard right side out, with the face of fabrics and emblems on the outside, completely working out the corners.					
	b. Baste tabard along the side and bottom edges of seam.	101		4-6	40/3	
	c. Press tabard smooth and flat with a heated pressing iron or pressing machine. Press marks shall not be permitted.					
6.	Close top edge.					
	a. Close the top edge with the raw edges turned to the inside approximately 3/8 inch, and tying cords positioned at the notches.					
	b. Stitch the top edge 1/8 to 3/16 inch from the folded edge with the tying cords caught in the stitching.	301	SSc-1	12-14	40/3	40/
	c. The cut ends of the tying cords shall be stitched together to prevent raveling.	301	SSa-1	4-6	40/3	40/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
7.	Clean tabard. a. Pull any basting thread, trim and remove any loose ends of threads, and remove any spots or stains.					
8.	Press cover. a. Press the tabard smooth and flat with a heated pressing iron or pressing machine.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

3.7 Finished measurements. The finished tabard shall conform to the measurements shown in Figure 1.

*3.8 Workmanship. The finished tabard shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the level set by the applicable acceptable quality levels (AQL's).

4. QUALITY ASSURANCE PROVISIONS

*4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

*4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of this certification.

*4.2 Inspection. Inspection shall be in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated herein.

*4.2.1 First article inspection. When first article is required, inspection shall be performed on a completely fabricated tabard for conformance to all provisions of this specification.

*4.2.2 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, figures and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document. In addition, testing shall be performed on components liste in Table II for characteristics noted. Wherever applicable, tests shall be conducted in accordance with FED-STD-191. All test reports shall contain individual values utilized in expressing the final results.

*4.2.2.1 Sampling for testing. Unless otherwise specified in subsidiary specifications, sampling shall be in accordance with the following:

Lot size (lot unit)	Sample size (sample unit)
800 or less	2
801 to 22,000	3
22,000 and over	5

The lot shall be unacceptable if one or more sample units fail to meet any test requirement specified herein. The unit for expressing lot size sample unit for testing component shall be in accordance with applicable subsidiary specification and as follows:

Component	Lot size expressed as:	Sample unit for testing
Buckram	Yard	1/4 yard full width
Tying cord	Tube, cone or spool	One cone, tube or spool
Rayon thread	Tube, cone or spool	One cone, tube or spool
Bobbin thread	Tube, cone or spool	One cone, tube or spool

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Table II. - Test Methods

Component	Characteristics	Rqmt. para.	Test methods	No. determinations per sample unit	Results reported as:
Buckram	Weight per sq. yd.	3.3.2	5041	5	Avg. of the 5 det. to nearest 0.1 oz.
	Yarns per inch:				
	- warp	3.3.2	5050	5	Avg. of the 5 det. in each direction to nearest whole number
	- filling	3.3.2	5050	5	
	Breaking strength	3.3.2	5100	5	Avg. of 5 det. to nearest 0.1 lb.
Tying cord	Material identification 1/				
	- core	3.3.4	Std Comm'l	1	Pass or fail
	- covering	3.3.4	Std Comm'l	1	Pass or fail
	No. of strands	3.3.4	Visual	1	To nearest number
	No. of core ends	3.3.4	Visual	1	To nearest number
	Turns per inch of strands	3.3.4	Visual	1	To nearest number
	Overall length of tying cord	3.3.4	Visual	1	To nearest 1/8 inch
	Color	3.3.4	Visual	1	Pass or fail
	Colorfastness to:				
	-wet (dry) cleaning	3.3.4	4622	1	Good, fair or poor
	light	3.3.4	4660	1	Good, fair or poor
Rayon thread	Material identification 1/	3.3.5	Std Comm'l	1	Pass or fail
	Ply	3.3.5	Visual	1	To nearest number

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Table II. - Test Methods

Component	Characteristics	Rqmt. para.	Test methods	No. determinations per sample unit	Results reported as:
	Yard per ounce	3.3.5	4010	5	Avg. of 5 det. to nearest yard per ounce
	Denier	3.3.5	4021	4	To nearest unit
	Breaking strength	3.3.5	4100	20	To nearest 0.1 lb.
	Color	3.3.5.1	Visual	1	Pass or fail
	Colorfastness to:				
	-wet (dry) cleaning	3.3.5.1	4622	1	Good, fair or poor
	light	3.3.5.1	4660	1	Good, fair or poor
Bobbin thread (Embroidered)	Material identification 1/	3.3.6.1	Std Comm'l	1	Pass or fail

1/ Accept a certificate of compliance for this requirement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

*4.2.2.2 In-process inspection. Inspection shall be performed during the manufacturing of the end item to ascertain that the operations are performed as specified herein. The Government reserves the right to determine the acceptability of construction methods not performed in accordance with specified requirements for operations or subassemblies.

*4.2.3 Examination of end items. The end item shall be examined for defects listed in 4.2.3.1 and 4.2.3.2. The sample unit shall be one tabard.

*4.2.3.1 General defects. General defects shall be classified as follows:

Examine	Defect	Classification Major	Minor
Basic material	Not fabricated of specified material	X	
	Color not as specified, does not match approved standard shade or specified shade number.	X	
	Color not uniform; is mottled, streaky, blotched or shaded.	X	
	Cut, hole or tear.	X	
	Thin place, tender or weak area.	X	
	Any embedded crease or wrinkle	X	
Fringe, and tying cord	Type, construction or color not as specified.	X	
	Frayed edges or ends.		X
	Cut, tear or abrasion	X	
	Spotted, stained or soiled		X
	Oversized knots		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
Thread	Not the color specified.	X	
	Cut, torn, or chafed.	X	
Design and construction	Varies from design or construction shown on Figures 1 and 2 or approved sample.	X	
	Any characteristic not in accordance with the specified design.	X	
Workmanship and assembly	Operation omitted or not accomplished as specified.	X	
	Any component or part missing.	X	
	Seam pleated or badly puckered.		X
	Needle chew which may develop into a hole.	X	
	Mend, darn or patch.	X	
	Thread ends not trimmed.		X
	Wrong stitch or seam type.	X	
	Tight tension, resulting in excessive puckering.		X
	Loose tension, i.e., lock not imbedded in material sewn.		X
	Seam, irregular, or uneven margin.		X
	Exposed raw edge.	X	
	Any seam open more than 1 inch.	X	
	Seam open 1 inch or less.		X
	Any run-off.		X
	Ends of stitching backstitched less than 1/4 inch (except when caught in order seams or stitching).		X
	Row of stitching omitted.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Classification Minor
	Thread break backstitched less than 1/2 inch.		X
	Three or more stitches per inch less than minimum specified.	X	
	One or two stitches per inch less than minimum specified.		X
	Stitches per inch in excess of minimum specified.		X
	Texture, density and stitch type of embroidered emblem does not conform to Figure 1 or standard sample.	X	
	Broken stitch in embroidery work.		X
	Embroidered emblem not applied as specified.	X	
	Design not oriented on each side as specified.	X	
	Design misplaced or in wrong location.	X	
	Design or parts of design reversed or inverted.	X	
	Fringe not completely attached as specified.	X	
	Fringe missing at bottom or side edge.	X	
	Fringe not continuous length.		X
	Fringe heading exposed.		X
	Tying cord missing.	X	
	Tying cord not attached to tabard as specified.	X	
	Tying cord not in location specified at top edge.		X
	Overall uncleanliness.		X
	Finished tabard not neatly pressed.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

*4.2.3.2 Dimensional examination. Any dimension that is not within the tolerances specified in Figure 1 shall be classified as a defect.

*4.2.3.3 Inspection levels and AQL's. Inspection levels and AQL's expressed in defects per 100 units (DHU) shall be as follows:

4.2.3.1

Inspection level I of MIL-STD-105	
Major	1.5 DHU
Total major and minor	10.0 DHU

4.2.3.2

Inspection level S-3 of MIL-STD-105	
One class	2.5

*4.2.4 Examination of preparation for delivery requirements. An examination shall be made to determine compliance with packaging, packing and marking requirements of Section 5 of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully packed, selected just prior to closing operation. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the inspection lot. The inspection lot shall be S-2 and the AQL shall be 2.5 DHU.

Examine	Defect
Marking	Omitted; incorrect, illegible, of improper size, location, sequence or method of application.
Materials	Any component missing; or component damaged, affecting serviceability.
Workmanship	Inadequate application of components, such as incomplete closure of case liners, container flaps, and loose strapping, bulging or distortion of containers.
Content	Number of intermediate packages is more or less than required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C, as specified (see 6.2).

*5.1.1 Level A. Each tabard shall be placed in an individual polyethylene bag fabricated from polyethylene film 0.0015 inch thick. The size of the bag shall be approximately 19 by 12 inches with a 1 inch lip along the open end of the 12-inch dimension. All seams and closures shall be effected by heat sealing, except the 1 inch lip along the open end. Prior to or during the final heat sealing operation, excess air shall be expelled in order to insure that the maximum number of tabards can be packed in the shipping container hereinafter specified. Each bag shall contain a label (see 5.3).

*5.1.2 Level C. Tabards shall be packaged in accordance with manufacturer's commercial practice.

5.2 Packing. Packing shall be level A, B or C, as specified (see 6.2).

5.2.1 Level A.

*5.2.1.1 Method 1. Thirty (30) tabards, packaged as specified in 5.1.1, shall be packed in a fiberboard shipping container with liner conforming to class weather resistant, grade V2s, size 1A, of MIL-B-17757. Each shipping container shall be assembled, closed and reinforced as specified in the appendix to the box specification.

*5.2.1.2 Method 2. When specified (see 6.2), 12 level B shipping containers (360 tabards) shall be overpacked in a fiberboard shipping container conforming to class weather resistant, size 4, of MIL-B-17757,reinforced as specified in the appendix to the box specification.

*5.2.2 Level B. Thirty (30) tabards, packaged as specified in 5.1.1, shall be packed in a fiberboard shipping container with liner conforming to class domestic, size 1A of MIL-B-17757. The fiberboard used for fabricating the container and the liner shall be grade 275. Each shipping container shall be assembled and closed as specified in the appendix to the box specification.

*5.2.3 Level C. Tabards shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with Uniform Freight Classification Rules or regulations of other carriers applicable to the mode of transportation.

5.3 Marking. In addition to any special marking required by the contract or order, the shipping containers shall be marked in accordance with the requirements of MIL-STD-129. A white paper label with the following information legibly printed or stamped thereon in black shall be inserted within each polyethylene bag in order to permit ready identification.

Nomenclature
Stock number
Contract number
Name of contractor

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The tabard described herein is intended for use by the Marine Corps Band and the Drum and Bugle Corps.

*6.2 Ordering data. Purchasers should exercise any desired options offered herein, and procurement documents should specify the following:

*6.2.1 Procurement requirements.

(a) Title, number, and date of this specification.
(b) Whether first article is required (see 3.2).
(c) Number of tabards in first article (see 3.2).
(d) Levels of packaging and packing (see 5.1 and 5.2).
(e) When level A. method 2, packing is required (see 5.1.1.2).

*6.2.2 Contract date requirements. Data conforming to Data Item Descriptions DI-R-4803, DI-R-4805, DI-T-4901, DI-T-4902, DI-T-4903 and DI-T-4904 will usually be required for delivery in connection with this specification. When so required, such data will be specified for delivery on a DD Form 1423 included in the contract.


*6.3 Samples and shade samples. For information regarding the availability of sample tabard, and of standard shade specified, address inquiry to the procuring activity issuing the invitation for bids.


*6.4 First article. First article examination, test and approval shall be as specified by the contracting officer (see 3.2).

*6.5 Marginal notations. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.


Preparing activity:
Navy - MC
Project No. 8345-N113

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

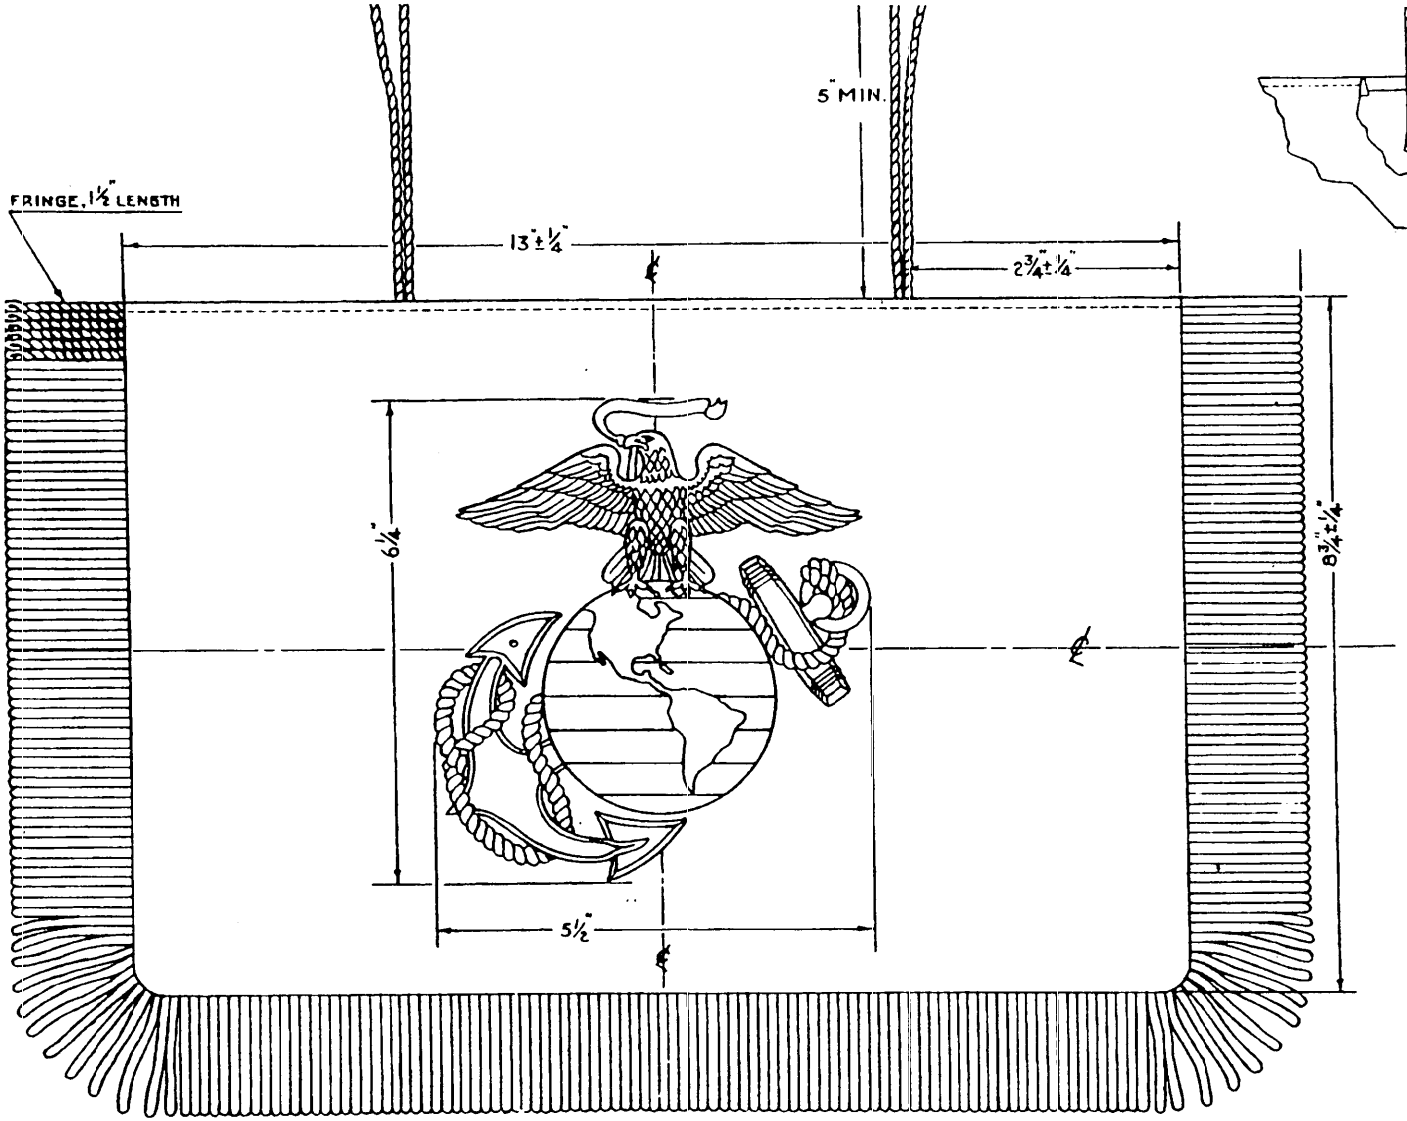


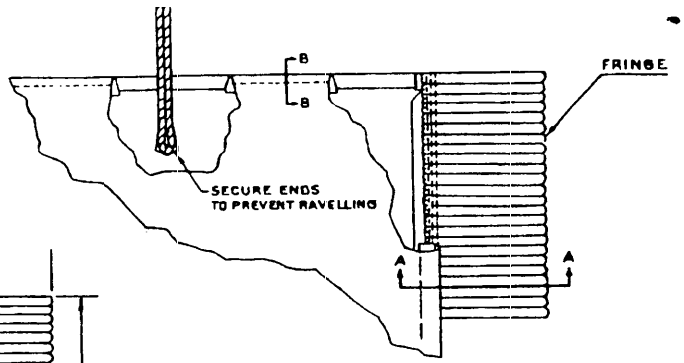

CONSTRUCTION DETAIL



SECTION A-A



SECTION B-B

MIL-T-82139A(MC)

FIGURE 1. TABARD: U.S.M.C. BAND, WITH FRINGE EMBROIDERED

M.C.S.A.
826 R.F.
6 Dec '72

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.



LOCATION OF COLORS FOR EMBLEM

COLOR CHART

NO.1. WHITE-HA CABLE NO. 67101
NO.2. SCARLET-HL CABLE NO. 67111
NO.3. SILVER GRAY-HAM CABLE NO. 67137
NO.4. LIGHT BLUE-HU CABLE NO. 67120
NO.5. OLD GOLD-HE CABLE NO. 67105

NOTES:

COLOR NO.1. (WHITE)
- A. EAGLE'S HEAD, NECK AND TAIL FEATHERS
- B. SOLID LINES OUTLINING CONTINENTS & ISLANDS

COLOR NO.2. (SCARLET)
- A. SOLID LINES OUTLINING EAGLES EYE, BEAK, WING; BREAST & LEG FEATHERS, & CLAWS
- B. SOLID LINES OF ANCHOR, & ROPE SEGMENTS

COLOR NO.3. (SILVER GRAY)
- A. ENTIRE GLOBE BACKGROUND

COLOR NO.4. (LIGHT BLUE)
- A. OUTLINE OF EAGLE'S NECK FEATHERS; CENTER LINE FOR 7 TAIL FEATHERS & HORIZONTAL LINES OF GLOBE & GLOBE OUTLINE

COLOR NO.5. (OLD GOLD)
- A. OUTLINE OF BANNER
- B. EAGLE'S BEAK, WINGS, BREAST, LEGS & CLAWS
- C. ANCHOR; ROPE SEGMENTS; CONTINENTS & ISLANDS

IGURE 2. TABARD: U.S.M.C. BAND, WITH FRINGE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE NAVY
DOD 317



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commanding General (826)
Marine Corps Supply Activity
1100 South Broad Street
Philadelphia, Pennsylvania 19146

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.