MIL-T-82251E
1 Oct 1987
SUPERSEDING
MIL-T-82251D
19 June 1980

MILITARY SPECIFICATION

TRUNKS, GENERAL PURPOSE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for a boxer style, general purpose trunk made from a polyester and cotton poplin fabric with a nylon knit supporter.

1.2 Classification. The trunks shall be of one type in the following classes and sizes (see 6.2):

Classes

Class 1 - Khaki 3726
Class 2 - Green 3452

Sizes

Small	Medium	Large	Extra Large	Extra Extra Large
(28-31)	(32-35)	(36-39)	(40-43)	(44-47)

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760-2490 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

* 2.1 Government documents.

* 2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

FEDERAL

V-B-871	- Button, Sewing Hole, and Button, Staple (Plastic)
V-T-285	- Thread, Polyester
NN-P-71	- Pallet, Material Handling, Wood, Stringer Construction, 2 Way and 4 Way (Partial)
JJ-W-155	- Webbing, Textile (Cotton, Elastic)
DDD-L-20	- Label; for Clothing, Equipage and Tentage (General Use)

MILITARY

MIL-B-371	- Braid, Textile, Tubular
MIL-B-17757	- Boxes, Shipping, Fiberboard (Modular Sizes)
MIL-C-21881	- Cloth, Poplin, Polyester and Cotton
MIL-T-43548	- Thead, Polyester, Core: Cotton-Rayon-or Polyester-Covered
MIL-P-15011	- Pallet, Material Handling, Wood, Post Construction, 4 Way Entry

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods
FED-STD-751	- Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-147	- Palletized Unit Loads

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the currentversion before use.

* 2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

US POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, US Government Printing Office, Washington, DC 20402.)

LAWS AND REGULATIONS

* 2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issue of the nongovernment documents which is current on the date of the solicitation.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Applications for copies should be addressed to the American Trucking Association, ATTN: Traffic Department, 1616 P Street, N.W., Washington, DC 20036).

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Applications for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606).

THE COLOR ASSOCIATION OF THE UNITED STATES

Standard Shades for Buttons - 1966
Standard Shades for Threads - 1968

(Applications for copies shall be addressed to the Color Association of the United States, 343 Lexington Ave., New York, NY 10016.)

* 2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample in which case this specification shall govern.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

3.2 First article. When specified, the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3 and 6.2).

3.3 Material. (See 6.4).

3.3.1 Cloth, poplin, polyester and cotton. The basic material shall conform to Type III, Class 1 or 2, of MIL-C-21881.

3.3.2 Cloth, nylon, knit. The nylon material used for the supporter shall be a white tricot jersey fabric, knitted from yarns of 40 denier, continuous filament, dull regular tenacity nylon. The fabric shall have a minimum of 32 wales and 32 courses per inch and shall weigh 2.0 (+ 0.3) ounces per square yard when tested as specified in 4.4.1.1.

3.3.3 Rubber tension tape. The rubber tension tape for the supporter leg openings shall be flat, white tape made of natural rubber, approximately 5/16 inch wide when tested as specified in 4.4.1.1.

3.3.4 Webbing, cotton elastic. The cotton elastic webbing used in the waistband shall be unbleached, Type I, Class 13 of JJ-W-155.

3.3.5 Braid, cotton tubular. The cotton braid used for the drawcord shall be Type III, Class 1 of MIL-B-371.

* 3.3.6 Thread, sewing. The polyester thread used for sewing the supporter shall be Type I, Class 1, letter size 00, 2 ply of V-T-285. The color shall be white, cable No. 66049, in accordance with the Standard Shades for Threads. The dyed covered polyester thread used for sewing the button shall be size 50, 2 or 3 ply of MIL-T-43548. The color shall be Olive Drab S-1, cable No. 66022, or Tan X, cable No. 66041, in accordance with the Standard Shades for Threads. The thread for all other seams and stitchings shall be either all polyester, Type I, Class 1, letter size A, 3 ply of V-T-285, or dyed covered polyester thread size 50, 2 or 3 ply of MIL-T-43548. The color shall be Olive Drab S-1, cable No. 66022, or Tan X, cable No. 66041, in accordance with the Standard Shades for Threads. The polyester core, polyester covered thread is not allowed.

* 3.3.7 Button. The sewing hole button for the pocket flap shall conform to Type II, Class D, Style 20, 21, 24-line of V-B-871. The color shall be Olive Green BP, cable No. 62016, or Tan AK, cable No. 62030, in accordance with the Standard Shades for Buttons.

*3.3.8 Label.

3.3.8.1 Label, identification. Each pair of trunks shall have an identification label conforming to Type VI, Class 4 of DDD-L-20, except that the format shall be as listed below. The fastness to laundering of DDD-L-20 shall apply. The label content shall be as follows:

TRUNKS, GENERAL PURPOSE
FIBER CONTENT: Polyester (65%) and Cotton (35%)
CONTRACT NUMBER: DLA-100-00-0-0000 (Example)
STOCK NUMBER: 8415-00-000-0000 (Example)
SIZE: (32-35)M (Example)
NAME OF CONTRACTOR:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

NOTE: Abbreviations for applicable sizes are as follows:

Small (28-31)	- S
Medium (32-35)	- M
Large (36-39)	- L
Extra Large (40-43)	- XL
Extra Extra Large (44-47)	- XXL

3.3.8.2 Label, instruction. Each pair of trunks shall have an instruction label conforming to Type VI, Class 3 of DDD-L-20, except that the format shall be as listed below. The fastness to laundering of DDD-L-20 shall apply. The label content shall be as follows:

LAUNDERING INSTRUCTIONS

Machine Wash, Warm

Tumble Dry
Medium Heat Setting

or

Follow NAVEDTRA Manual 414-01-45-81, Formula II

3.4 Design. The trunks shall be a boxer style with a covered elastic waistband and a concealed drawcord. A pocket with buttoned flap shall be located in the upper right front. The trunks shall be equipped with a full built in nylon knitted supporter with elasticized leg openings (see Figures 1 and 2).

3.4.1 Figures. The figures are furnished for information purposes only. To the extent of any inconsistencies between the written specification and the figures, the written specification shall govern.

3.5 Patterns. Standard patterns to be used to cut working patterns will be furnished by the Government (see 6.3). The patterns allow 1/2 inch for all double lapped and double stitched seams, except as otherwise indicated in Table I. The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way.

3.5.1 Pattern parts. The component parts shall be cut from the material as specified and in accordance with the following list of pattern parts:

Material	Pattern parts	Cut parts
Cloth, poplin, polyester and cotton	Back	2
	Front	2
	Pocket (front)	1
	Pocket (back)	1
	Pocket flap	2
Cloth, nylon, knit	Supporter	1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

3.6 Construction.

* 3.6.1 Stitches, seams, and stitching types. Stitch, seam and stitching types as specified in Table I shall conform to the requirements of FED-STD-751. Whenever two or more methods for seams or stitching are given for the same operation, anyone of them may be used. Seam allowances shall be maintained with seams sewn so that no raw edges, runoffs, twists, pleats, puckers, or open seams result. All seams shall start and finish evenly. Thread tension shall be maintained so that there is no tight or loose stitching. Where stitch type 401 is used, the looper (underthread) shall be on the inside of the trunks. In the 500 and 600 stitch class series, the cover thread shall be similar to the looper thread. Unless otherwise specified, double needle stitching shall be 3/16 to 1/4 inch gauge with the outer row of stitching 1/16 inch from finished edge. Edgestitching and topstitching (raised) shall be 1/16 inch from folded edge except as otherwise specified. Ends of all seams produced by stitch type 401 or 101 shall be caught in other seams or stitching. The width of the safety stitch shall be 3/8 inch and the guides and knives on the machine shall be set to trim only the raveled ends of the fabric.

3.6.2 Stitches per inch. The minimum and maximum number of stitches shall be as specified in Table I.

* 3.6.3 Thread breaks and ends of seams. Ends of all seams and stitchings when not caught in other seams or stitchings shall be backtacked not less than 3/8 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks (all stitch types) shall be secured by stitching back of break not less than 1/2 inch. Skipped stitches or thread breaks may be repaired by using 301 stitch type.

* 3.6.4 Buttonholes. The buttonholes shall be straight style with both ends securely barred. The finished cut length shall be 5/8 to 11/16 inch.

3.7 Manufacturing operations requirements. The trunks shall be manufactured in accordance with operation requirements as specified in Table I. The contractor is not required to follow the exact sequence of operations provided the finished trunks are identical to that produced by following the sequence listed in Table I.

* 3.7.1 Shade and size marking. The component parts shall be marked to insure a uniform shade and size throughout the trunks. Any method may be used except:

a. Corrosive metal fastening devices
b. Sew-on shade tickets
c. Adhesive type tickets which discolor, or whose adhesive sticks to the material upon removal of the tickets.

NOTE: The use of ink pad numbering machine, rubber stamp, or pencil is acceptable provided the numbers do not show through the outside of the trunks and whenever possible, numbers shall be covered by seam allowance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

* 3.7.2 Abbreviations in table of operations. The abbreviations used in table I are as follows:

Stch	-	Stitch
in	-	inch
Ndl	-	Needle
Bob	-	Bobbin
Lpr	-	Looper
Mchne	-	Machine
Brtck	-	Bartack
Comrcl	-	Commercial
smlr	-	similar
Btnhl	-	Buttonhole
incl	-	including
dbl	-	double
chnstch	-	chainstitch

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF TRUNKS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
1.	Cutting.					
	a. Cut the trunks in strict accordance with patterns, which show size, shape, placement of pockets, warp directional lines, and notches for proper assembly of all parts.					
	b. The elastic webbing and the drawstring shall be cut as specified in operations 6b and 7g.					
	c. The back, front, and top ply of pocket flap shall be cut from one piece of material. The pocket plies and underply of pocket flap may be cut from ends.					
2.	Replacement of defective components. During the spreading, cutting, and manufacturing process, components having material defects or damages that are classified as defects in Section 4 shall be removed from production and replaced with non-defective and properly matched components.					
3.	Size and shade marking. Mark, ticket, (see 3.7.1) or bundle components to insure a uniform shade and proper size assembly throughout the trunks unless otherwise specified.					
4.	Make and attach pocket flap. Finished appearance - the flap shall be finished smooth and flat, without pleats, twists, puckers, or raw edges and be uniform in shape and size. The edges of the flap shall be well forced out and the edge stitching shall be uniform.					
	a. Seam both plies of pocket flap 1/4 (+ 1/16) inch from outer edges face to face along sides and bottom edge.	301 or 401	SSe-2(a)	10-14	A or 50	A or 50
	b. Turn, work out edges and point. Stitch 3/16 inch from outer edge along pocket flap contour.	301	SSe-2(b)	10-14	A or 50	A or 50

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF TRUNKS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	c. Make one vertical buttonhole in the center of the flap (1/4 inch off center tolerance permitted) with the lower end of buttonhole 1/2 (± 1/8) inch from the apex.	Button-hole		42-46 per button-hole including tack	A or 50	A or 50
	d. Stitch pocket flap to outside right front panel 3/16 inch from top edge of pocket opening in accordance with marks on patterns.	301	LSbj-1	10-14	A or 50	A or 50
5.	Make pocket. Finished appearance - the pocket shall be made without gathers, pleats, puckers, or raw edges and shall be of a uniform size for all size trunks.					
	a. Align straight edge of the pocket (front) and straight edge of flap on the outside of right front panel. Stitch front pocket ply and right front panel, 3/16 inch from marks on pattern for pocket opening.	301	SSe-2(a)	10-14	A or 50	A or 50
	b. Slash the front panel between the two seams and notch corners to form a pocket opening.					
	c. Turn the pocket through the opening and topstitch.	301	SSe-2(b)	10-14	A or 50	A or 50
	d. Superimpose the pocket (back) on the pocket (front). Attach both plies by overedge stitching all around.	503 or 504 or 602	SSa-1 and EFd-1	8-10	A or 50	A or 50
	e. Turn up raw edges of flap and trunks to inside of right front panel. Turn flap down and raise stitch 1/16 inch from the edge through flap and pocket (back). Continue the stitching down the sides of flap approximately 1/2 inch.	301	SSa-1	10-14	A or 50	A or 50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF TRUNKS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	f. The finished flap shall measure 3-3/8 (+ 1/8) inches in width at joining seam, 1-1/8 (+ 1/8) inches along the side and 1-3/4 (+ 1/8) inches at center. The finished pocket shall be 3-1/2 (+ 1/8) inches in depth and 3-1/4 (+ 1/8) inches in width at the opening.					
6.	Make supporter. Finished appearance - the supporter shall be made with no gathers, pleats, puckers, or exposed raw edges. All operations shall be performed on the side which will face the basic material.					
	a. Overedge one side seam of the supporter, 1/8 to 3/16 inch from the raw edges.	503 or 504 or 602	SSa-1	10-14	00	00
	b. Cut elastic webbing in the following lengths: S - 22-3/8; M - 26-3/8; L - 30-3/8; XL - 34-3/4; XXL - 38-3/8 inches. A tolerance of + 1/4 inch will be permitted.					
	c. Sew the top edge of the supporter assembly under the bottom edge of the webbing, starting and ending at the open side with the fullness distributed evenly. The overlap shall be approximately 1/2 inch.	606 or 607	LSa-1	10-14	00	00
	or					
	d. As an alternate, the top edge of the supporter shall be folded under 1/4 inch and attached to the bottom edge of the webbing, starting and ending at the open side with the fullness distributed evenly. The overlap shall be approximately 1/4 inch.	406 or 407	LSb-2 or LSb-3	10-14	00	00
	e. Close the supporter assembly by overedging the ends of the webbing and the remaining sides of the supporter in one continuous operation.	503 or 504 or 602	SSa-1	10-14	00	00

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF TRUNKS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	f. Fold in the edge of the supporter assembly material at each leg opening approximately 1/8 inch. Fold in half the width of the rubber tape over the folded edge of the material and bind seams. The ends of the tape shall overlap a minimum of one inch.	505	BSa-1	16-20	00	00
7.	Trunk assembly.	Button-hole		42-46 per button-hole including tack	A or 50	A or 50
	a. Make two vertical buttonholes 1/2 (+ 1/16) inch on either side of front seam and 3/4 (+ 1/16) inch from the unfinished top edge. The buttonholes shall be aligned (1/8 inch tolerance permitted).					
	b. Join all the panels with a double-lapped and double-stitched seam 3/16 to 1/4 inch gauge.	301 or 401	LSc-2	10-14	A or 50	A or 50
	c. Overedge all around the top edge of the trunks.	503 or 504 or 602	EFd-1	16-20	A or 50	A or 50
	or					
	d. As an alternate, the edge of the elastic webbing of the supporter and waistband assembly, positioned as specified in 7e, may be caught in the stitching.	503 or 504 or 602	SSa-1	16-20	A or 50	A or 50
	e. Insert the supporter and waistband assembly into the trunks with the side of the unfinished seams facing the basic material and the webbing side seam superimposed on one of the side trunk seams.					

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF TRUNKS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	f. Turn in the top of the trunks over the webbing as indicated by fold line on pattern to form a waistband. When operation 7c is performed in lieu of 7d, the cloth shall extend beyond the webbing 1/8 to 1/4 inch. Stitch the waistband with 3 rows of stitching, 1/2 (± 1/16) inch apart with the elastic webbing stretched out. The top stitch line shall be 1/2 (± 1/16) inch from the top of the trunks. Simultaneously catch the top portion of the identification label in the bottom row of stitching at the inside center back of the trunks. Catch the top portion of the instruction label in the bottom row of stitching between the inside center back seam and the inside left side seam of the trunk.	301 or 401	EFa-3	12-14	A or 50	A or 50
	NOTE: When the option to catch the elastic webbing of the supporter and waistband assembly in the overedging (operation 7d) is exercised, the identification and instruction labels shall be stitched in their respective positions (operation 7f) to the inside edge of the waistband on the overedged seam. The label stitching shall extend not less than 1/2 inch beyond the end of the labels on each side or shall be backtacked in accordance with 3.6.3.	301	LSbj-1	8-10	A or 50	A or 50
	g. Cut drawcord the following lengths: S-44; M-46; L-48; XL-50; XXL-52 inches. A ± 1/2 inch tolerance is permitted. Insert end of drawcord through one of the waistband buttonholes and thread along the waistband through to the other buttonhole. Place a knot at each end of the drawcord.					
	h. The finished waistband shall have a puckered effect with the drawcord enclosed in the middle channel between the webbing and the turned-in portion of the fabric.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF TRUNKS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	NOTE: When stitch type 401 is used, the ends of all 3 rows of stitching shall be bartacked or backtacked.	Bartack or		21-28 per bartack	A or 50	A or 50
		Auto-matic Loop tacker or 301	D	24-28 per bartack	A or 50	A or 50
	i. Hem the bottom of each leg opening. The finished hem shall measure 5/8 (+ 1/8) inch wide).	301	EFb-1	10-14	A or 50	A or 50
	j. Sew button on pocket to align with buttonhole.	301 or 101		14-16 per button	50	50
				20-22 per button	50	
8.	Clean trunks.					
	a. Trim and remove all ends of stitching and loose threads.					
	b. Remove all spots and stains.					
	c. Remove all shade and size tickets.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

* 3.8 Sizes and measurements. Sizes and measurements of finished trunks shall be as shown in Table II (see Figures 1 and 2). All measurements and tolerances are expressed in inches. For reference to the letters, see Figure 1.

Table II - Finished trunk measurements

Size	A Front length	B Back length	C Side length	D Waist Relaxed	D1 Waist Stretched	E Leg opening	F Crotch width	G Seat width
Small (28-31)	13	16-1/2	13-3/4	12	18-1/2	12-5/8	5	21
Medium (32-35)	13-3/4	17-1/4	14-1/2	14	20-1/2	13-1/2	5-1/2	22-3/4
Large (36-39)	14-1/2	18	15-1/4	16	22-1/2	14-3/8	6	24-1/2
X-Large (40-43)	15-1/4	18-3/4	16	18	24-1/2	15-1/4	6-1/2	26-1/4
XX-Large (44-47)	16-1/2	20	17-1/4	20	26-1/2	16-1/8	7	28
Tolerance:	± 1/2	±1/2	±1/2	±1	±1	±1/2	±3/8	±1

NOTE: Measurement shall be taken with trunks laid flat and smooth with the pocket buttoned.

*A. Front length - measure from the top edge of waistband along front seam to the folded edge of the crotch seam.

*B. Back length - measure from top edge of waistband along back seam to the folded edge of the crotch seam.

C. Side length - measure from top edge of waistband along either side seam to bottom of leg opening.

D. Waist, relaxed - measure the width across the top from side seam to side seam with the waistband in a relaxed position.

D1. Waist, stretched - measure the width across the top from side seam to side seam with the waistband stretched under normal tension.

*E. Leg opening - measure the width of each leg opening across the hem from side seam to the fold near the crotch seam.

F. Crotch width - measure the width of crotch across the crotch seam.

*G. Seat width - measure across the seat from the folded edge of the side seam to folded edge of opposite side seam approximately 8-1/2 inches from the top of the trunks.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

3.9 Workmanship. The finished trunks shall conform to the quality established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the contractor may use his own or any other facilities suitable for performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

* 4.1.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection. The first article submitted in accordance with 3.2 shall be inspected as specified in 4.4.2 for compliance with design, construction, workmanship, and dimensional requirements.

4.4 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable procurement documents.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

4.4.1.1 Testing of components. In addition to the quality assurance provisions of the referenced specifications, components listed below shall be tested for the characteristics shown in Table IV. The methods of testing specified in FED-STD-191 wherever applicable and as specified herein shall be followed. All test reports shall contain the individual values utilized in expressing the final result. The sample size shall be in accordance with Table III and the lot shall be unacceptable if one or more units fail to meet any requirement specified. The sample unit and basis for lot size shall be expressed as follows:

Material	Basis for lot size	Sample unit
Rubber, tension tape	Yard	1/4 yard
Cloth, nylon, knit	Yard	1/2 yard, full width

Table III - Sample size

Lot size	Sample size
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

Table IV - Testing of components

Component	Characteristics	Requirement paragraph	Test method
Cloth, nylon, knit	Material identification	3.3.2	1/
	Denier	3.3.2	1/
	Luster	3.3.2	1/
	Tenacity	3.3.2	1/
	Texture (wales & courses)	3.3.2	5070
	Weight	3.3.2	5041
Rubber, tension tape	Width	3.3.3	5020
	Composition	3.3.3	1/
	Color	3.3.3	Visual 2/

1/ A certificate of compliance will be accepted as evidence of conformance with this requirement.

2/ One determination shall be made from each sample unit and the results reported as "pass" or "fail"

4.4.2 Examination of the end item. Examination of the end item shall be in accordance with 4.4.2.1 through 4.4.2.2. The lot size shall be expressed in units of one pair of trunks each. The sample unit for this visual examination shall be one pair of trunks. The inspection levels and the acceptable quality levels shall be as specified in 4.4.2.3.

4.4.2.1 Visual examination. The trunks shall be examined for defects in color, design, material, construction, workmanship and marking and the defects classified in accordance with the following list:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
MATERIAL DEFECTS AND WORKMANSHIP DAMAGES		
a. Any hole, cut, tear, smash, visible mend, needle chew, burn, drill hole, scorched area, multiple float or open place		
1. On outside	X	
2. On inside		X
b. Knot, large slub, snag, misweave, shade bar, coarse yarn, missing yarn, broken yarn, loose yarn, thin place, woven in waste or area of no dye penetration		
1. On outside	X	
2. On inside		X
c. Permanent fold or pleat in cloth caused by seaming or stitching		
1. On outside	X	
SHADED PART		
a. On outside:		
1. Any part shaded (except parts which may be cut from ends)	X	
2. Variation in shade within a part (except parts which may be cut from ends)	X	
3. Part cut from ends badly shaded		X
CLEANNESS		
a. One or more spots or stains on outside		
1. Up to 1/2 inch		X
2. More than 1/2 inch	X	
b. Spot or stain on inside more than 1/2 inch		X
c. More than 3 thread ends not trimmed to 1/4 inch or less on outside		X
d. More than 5 thread ends not trimmed to 1/8 inch or less on inside		X
e. One or more shade or size tickets not removed		X
f. Any shade or size marking exposed or readily visible on outside of garment.		X

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
COMPONENTS AND ASSEMBLY		
a. Any component not as specified	X	
b. Any operation not as specified (unless otherwise classified herein)	X	
c. Any component part or required operation omitted (unless otherwise classified herein)	X	
d. Any component part tight, twisted, distorted, misshapped, pleated, puckered, or full (unless otherwise specified herein)		X
e. The edge of any component part required to be forced out having folds of more than 1/8 inch (unless otherwise classified herein)		X
CUTTING		
Any component part not cut in accordance with directional lines indicated on patterns or not in accordance with specification requirements	X	
SEAMS AND STITCHING		
a. Accuracy of seaming		
1. Seam puckered, pleated, irregular, wavy, or edge not fully worked out		X
2. Part of trunks caught in any unrelated operation or stitching	X	
3. Needle perforations visible on outside, more than 1 inch		X
4. End of seam or stitching when not caught in another seam or stitching not securely backtacked or back stitched less than 3/8 inch		X
5. Stitch overlapping ends of thread break less than 1/2 inch		X
6. Not specified color thread used on outside		X
7. End of continuous line of stitching overlapped less than 1/2 inch		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
b. Gage of stitching and seam allowance		
1. Stitching irregular, not within range specified or varies more than 1/16 inch when no range is specified (score only when condition exists on more than half the length of seam)		X
2. Edge, top or raised stitching sewn too close to edge resulting in damage to cloth	X	
3. Width of seam allowance varies more than 1/16 inch from allowance specified (score only when condition exists on more than 1/2 the length of seam)		X
c. Open seam		
1. On outside		
(a) more than 3/4 inch	X	
(b) up to 3/4 inch inclusive		X
2. On inside		
(a) more than 1 inch	X	
(b) up to 1 inch inclusive		X
d. Runoff, skipped or broken stitches:		
1. On joining seam - when resulting in an open seam use "Open seam" classification		
2. On edge, top or raise stitching - more than 1/4 inch (when not resulting in an open seam)		X
NOTE: One or more broken stitches or two or more continuous skipped or runoff stitches constitutes an open seam. On double stitched seams a seam is considered open when one or both stitches of the seam is opened.		
e. Raw edge		
1. On outside:		
(a) more than 3/4 inch	X	
(b) 1/4 to 3/4 inch inclusive		X
2. On inside:		
(a) more than 1 inch		X
3. Any raw edge caused by the omission of overedge or serging stitching for a distance of 1 inch or more		X
f. Seam and stitch type		
1. Not specified seam or stitch type	X	
2. Any line of stitching omitted or insecure		X
3. Any line of stitching not beginning or ending where specified (unless otherwise classified herein)		X
4. Looper thread on outside	X	

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the currentversion before use.

Defect	Classification Major	Minor
g. Stitch tension		
1. Loose tension resulting in a loose seam:		
(a) more than 1 inch	X	
(b) up to 1 inch inclusive		X
2. Loose tension resulting in loose or tangled loops of lower or top thread		X
3. Tight tension (stitches break when normal strain is applied in the direction of the seam or stitching)	X	
4. Overedge stitching too loose, causing thread to pull away from fabric or too tight causing edge to roll		X
h. Stitches per inch (score only when condition exists on more than 1/2 the length of seam)		
1. More than the maximum specified		X
2. Less than the minimum by two or more stitches		X
i. Bartack, backtack, tack or tacking		
1. Missing, insecure, misplaced, not serving intended purpose, or not specified size or type		X
2. Loose stitch tension		X
j. Seam direction		
Any seam not facing direction specified		X
BUTTONHOLES (POCKET FLAP AND DRAWCORD OPENING)		
a. Omitted	X	
b. Buttonhole stitching not securely caught in fabric, causing stitching to pull away from fabric	X	
c. One or more broken stitches or continuous skipped stitches in buttonhole or incomplete buttonhole		X
d. Wrong type, ends not securely tacked, uncut buttonhole		X
e. Waistband buttonholes out of alignment by more than 1/8 inch		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
BUTTON		
a. Missing, loose or broken	X	
b. Not specified type, size or color		X
c. Insecurely sewn		X
OUTSIDE OF TRUNKS		
ELASTIC WAISTBAND		
a. Fullness not evenly distributed in stitching elastic waistband to top of trunk		X
b. Elastic webbing stitched to top of trunks with less than three rows of stitching	X	
c. Rows of stitching through waistband spaced less than 3/8 inch or more than 5/8 inch apart		X
d. Top row of stitching less than 3/8 inch or more than 5/8 inch from top of trunks		X
e. Drawcord not positioned between top and center rows of stitching		X
f. Knot omitted on one or both ends of drawcord		X
g. Drawcord caught in row of stitching through waistband	X	
h. Turn back at top of trunks not covering the elastic webbing 1/8 to 1/4 inch	X	
POCKET AND FLAP		
a. Notched exposed at end of pocket opening	X	
b. Ends of opening extending beyond edge of flap by 1/8 inch or more		X
c. Width across top of flap less than 3-1/4 inches or more than 3-1/2 inches		X
d. Width along side of flap less than 1 inch or more than 1-1/4 inches		X
e. Width at center of flap to point less than 1-5/8 inches or more than 1-7/8 inches		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
f. Pleat, twist, pucker, or raw edge in finished pocket of flap	X	
g. Inside depth of pocket from lower edge of pocket opening less than 3-3/8 inches or more than 3-5/8 inches		X
h. The width at opening of pocket less than 3-1/8 inches or more than 3-3/8 inches		X
i. Button and buttonhole not aligned, causing bulge or twist on front of flap when buttoned	X	
j. Buttonhole less than 3/8 inch or more than 5/8 inch from pointed end of flap		X
k. Buttonhole off center with flap by more than 1/4 inch	X	
l. Stitching on side edge of flap omitted or insecure	X	
LEG BOTTOM		
a. Hem twisted, puckered, or pleated	X	
b. Hem less than 1/2 inch or more than 3/8 inch wide		X
DRAWCORD OPENING		
a. Missing, less than number specified	X	
b. Buttonhole; type other than straight, vertical		X
c. Buttonholes positioned less than 7/16 inch or more than 9/16 inch from either side of front seam		X
d. Buttonholes positioned less than 11/16 inch or more than 13/16 inch from top folded edge of trunks		X
e. Buttonholes constructed through outside of trunks		X
SUPPORTER		
a. Ends of elastic webbing not securely joined at side seam		X
b. Fullness not evenly distributed in stitching top edge of supporter to bottom edge of elastic webbing		X
c. Rubber tape on leg opening set too loose or too tight causing bulge or twist on leg opening		X

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
d. Unfinished seams of supporter not facing the basic material	X	
e. Gather, pleat, pucker, or exposed raw edge	X	
LABEL		
a. Missing, incorrect, or illegible	X	
b. Not attached as specified, misplaced or stitching through the printing		X
c. Not securely stitched to lower edge of waistband		X
d. Identification label off center with center of back by more than 2 inches		X
e. Instruction label - not positioned between the inside center back seam and the inside left side seam of trunks		X

4.4.2.2 Dimensional examination. Any measurement deviating from the nominal dimensional and tolerances specified in Table II shall be scored as a size measurement defect. Side lengths unequal in length by 1/2 inch or more shall be scored as a size measurement defect.

4.4.2.3 Inspection levels and acceptable quality levels. The inspection levels and acceptable quality levels (AQL's) expressed in defects per 100 units for visual and dimensional examination shall be as follows:

	AQL's	Inspection level
For visual examination in 4.4.2.1		
Major	2.5	II
Total (Major and Minor combined)	15.0	II
For examination in 4.4.2.2:		
One class	4.0	S-3

4.4.3 Examination of packaging requirements. An examination shall be made to determine that packaging, packing, and marking comply with Section 5 requirements of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be on the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Examine	Defect
Marking (exterior and interior	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, improper taping, inadequate stapling, bulged or distorted container.
Content	Number of items per shipping container is more or less than required. Size shown on one or more items not as specified on shipping container. 1/

1/ For this defect, one item from each shipping container in sample shall be examined.

4.4.4 Palletization examination. An examination shall be made to determine that the palletization complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the end item inspected lot. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5 in accordance with MIL-STD-105.

Examine	Defect
Finished dimensions	Length, width,or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.

5. PACKAGING

5.1 Preservation packaging. Packaging shall be level A or C (see 6.2).

5.1.1 Level A. Each pair of trunks shall be folded in half along the length. The bottom of the trunks shall be folded up so that the trunks measure approximately 11-1/2 by 7-1/2 inches. The larger sizes shall have the side seams adjusted inward to achieve the desired width. Five pairs of trunks of one size and color only, shall be neatly stacked with each pair reversed end to end and secured at each end with cotton tape or twine to form a bundle.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the currentversion before use.

5.1.2 Level C (Commercial packaging). Trunks shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A, B, or C (see 6.2).

* 5.2.1 Level A. Twenty pairs of trunks of one size and color only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed, and reinforced conforming to type CF, class weather-resistant, variety DW, grade V15c, size 1A of MIL-B-17757. The fiberboard for the box liner shall conform to type CF, class domestic of MIL-B-17757. Level A packages shall be packed flat, two in length, one in width, and two in depth, with the length of the bundles parallel to the end panels of the container. The contents of each container shall be completely covered on the top and bottom with a sheet of commercial grade kraft paper. Toward the end of the contract, or when there are less than the required amount per container of the same size, mixed sizes of one class only may be packed within the same shipping container.

* 5.2.2 Level B. Twenty pairs of trunks of one size and color only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed and reinforced conforming to type CF, class domestic, variety DW, grade 200, size 1A of MIL-B-17757. The fiberboard for the box liner shall conform to type CF, class domestic of MIL-B-17757. Level A packages shall be packed flat, two in length, one in width, and two in depth, with the length of the bundles parallel to the end panel of the container. The contents of each container shall be completely covered on the top and bottom with a sheet of commercial grade kraft paper. Toward the end of the contract, or when there are less than the required amount per container of the same size, mixed sizes of one class only may be packed within the same shipping container.

5.2.3 Level C. Item packaged, as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the US Postal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

* 5.3.1 Labels, mixed sizes. Each shipping container, packed with mixed sizes only, shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 4 by 5 inches with the words "MIXED NSN'S" plainly stamped or printed thereon and under these words shall be legibly stamped or printed the correct quantity and National Stock Numbers contained therein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

* 5.4 Palletization. When specified (see 6.2) item packed as specified shall be palletized on a 4-way entry pallet in accordance with load Type Ia of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means C, K, and L or O or P. Pallet pattern shall be in accordance with the appendix of MIL-STD-147.

The pallet shall be 4-way, Type IV; Type V, Class 1, Size 2; or Type VIII, fabricated from wood group I, II, III or IV, Grade A of NN-P-71, or 4-way, Style 1, Size A, Type I, Class 1 fabricated from wood groups specified of MIL-P-15011. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall be approved by the contracting officer.

6. NOTES

6.1 Intended use. The trunks are intended for wear by male military personnel as a general utility item and for swimming and recreation purposes.

* 6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification
b. Sizes and classes required (see 1.2)
c. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
d. When first article inspection is required (see 3.2), the item will be tested and should be a first article sample. The contracting officer should include specific instruction in acquisition documents regarding arrangement for examinations, quantity, and testing and approval.
e. When palletization is required (see 5.4).

6.3 Samples and patterns. For access to standard sample and patterns, address the procuring activity issuing the invitation for bids (see 3.1 and 3.5).

6.4 Recycled material. It is encouraged that recylced material be used when practical as long as it meets the requirements of this specification (see 3.3).

6.5 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:39Z
Check the source to verify that this is the currenversion before use.

* 6.6 Subject term (key word) listing.

Shorts, athletic
Trunks, swimming
Cloth, poly/cotton
Clothing, athletic
Supporter, built in

Custodian:
Navy - NU
Army - GL
Air Force - 99

Review Activity:
DLA - CT
Army - MD
Navy - MC
Air Force - 82

User activity:
Navy - CG
Air Force - 45

Preparing Activity:
Navy - NU

Project No. 8415-0525

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

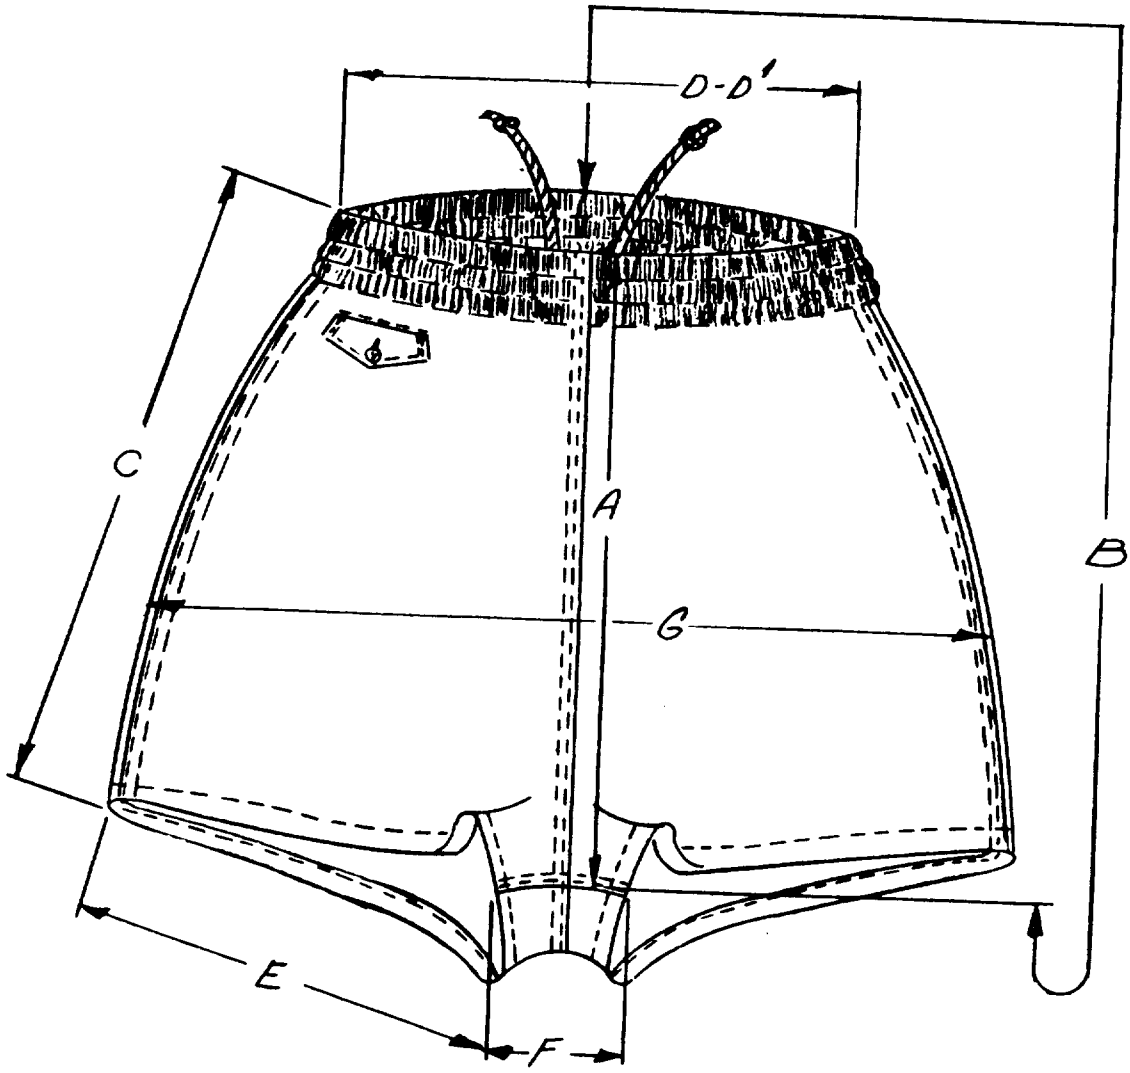


Figure 1 - Trunks, General Purpose

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

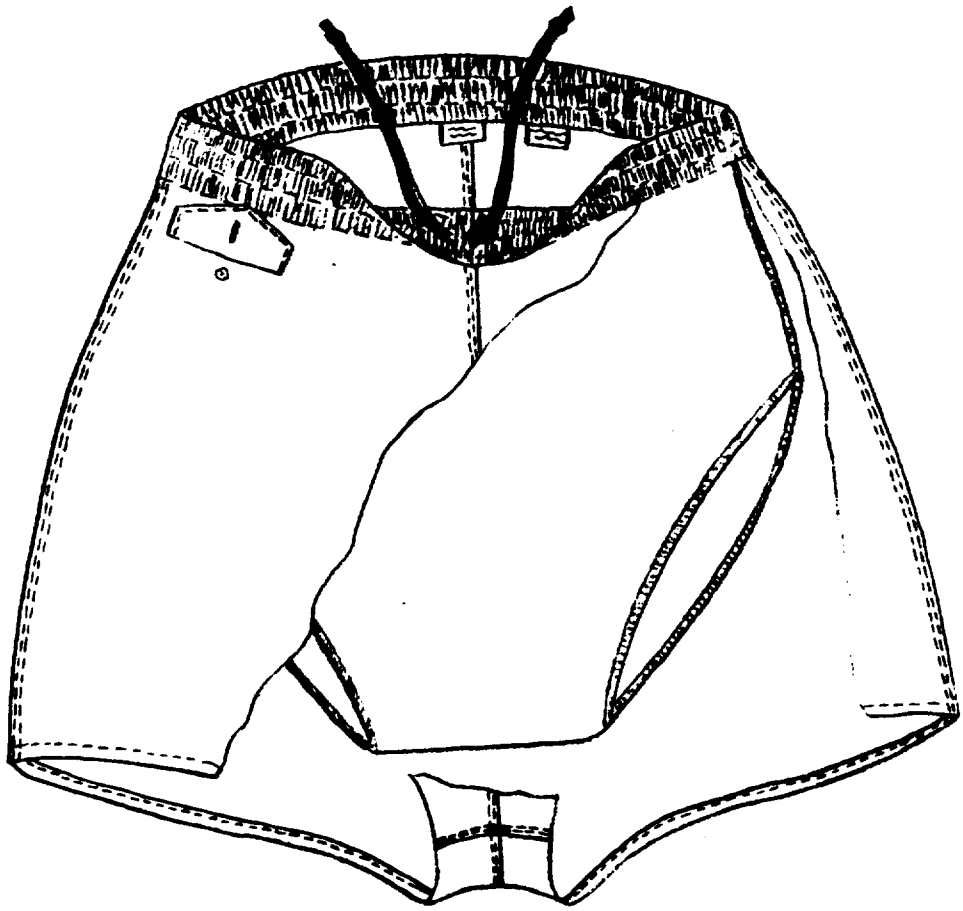


Figure 2 - Trunks, General Purpose

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Officer in Charge
Navy Clothing & Textile Research Facility
21 Strathmore Road (Code 50)
Natick, MA 01760-2490

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-T-82251E	TRUNKS, GENERAL PURPOSE

3a. NAME OF SUBMITTING ORGANIZATION

b. ADDRESS *(Street, City, State, ZIP Code)*

4. TYPE OF ORGANIZATION *(Mark one)*

- ☐ VENDOR
- ☐ USER
- ☐ MANUFACTURER
- ☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.