MILITARY SPECIFICATION SHEET

LOCK, FLUSH, TYPE A, DEAD BOLT

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the lock described herein shall consist of this specification and the latest issue of MIL-L-2898(SH).

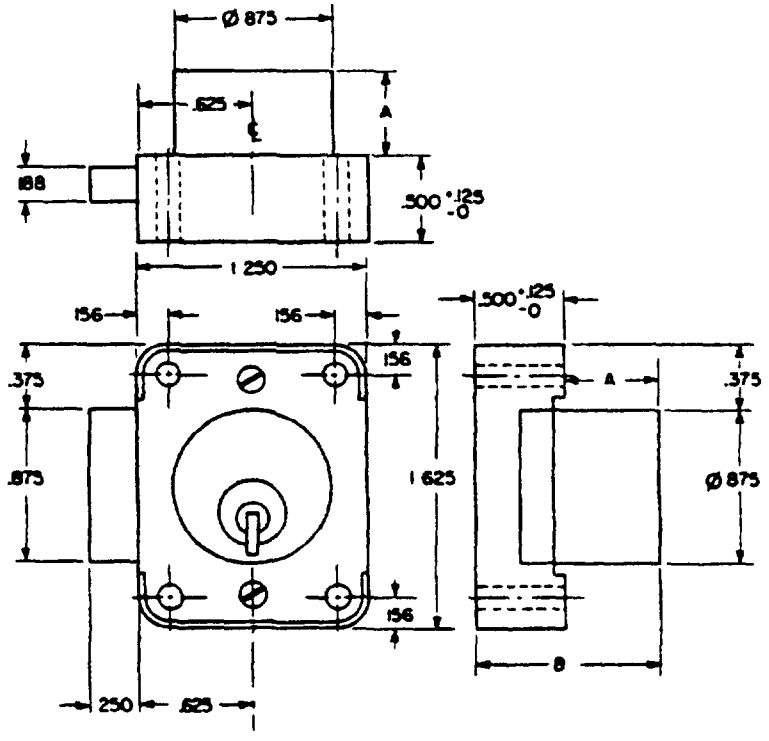

SH 13232055

NOTES:

1. All dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.010.

FIGURE 1. Lock, flush, type A, dead bolt.

AMSC N/A
FSC 5340

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:52Z
Check the source to verify that this is the current version before use.

REQUIREMENTS.

1. Material: Material shall be as specified in the procurement specification.
2. Part number: The part number consists of the letter "M", the basic number of this specification sheet, followed by a dash number taken from table I.

EXAMPLE. M2898/1-1

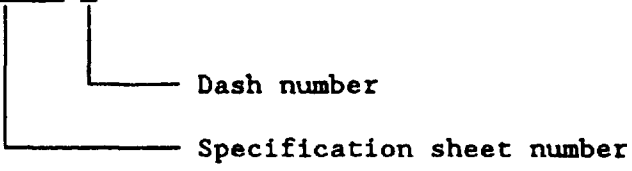

M2898/1-1 Indicates - Lock, Flush, Type A, Dead Bolt; Cylinder Length .625 inch.

TABLE I Dash numbers and dimensions

Dash number	A	B
1	.625	1.125
2	.750	1.250
3	.875	1.375

Preparing activity
Navy - SH
Agent:
DLA - IS

(Project 5340-1882)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:52Z
Check the source to verify that this is the current version before use.