MIL-M-2848E(SA)
27 September 1978
SUPERSEDING
MIL-M-2848D(SA)
28 June 1972

MILITARY SPECIFICATION

MASK, ANTIFLASH

This specification is approved for use by Naval Supply Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope This specification covers the requirements for one type and size, cotton protective face mask.

2. APPLICABLE DOCUMENTS

2.1 Issue of document The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

V-T-276	- Thread, Cotton
JJ-W-155	- Webbing, Textile (Cotton, Elastic)
CCC-C-458	- Cloth, Flannel, Cotton
DDD-L-20	- Label; For Clothing, Equipage, and Tentage (General Use)
PPP-B-636	- Boxes, Shipping, Fiberboard

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Navy Clothing and Textile Research Facility, Natick, MA 01760 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8415

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:48Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

FED-STD-191 - Textile Test Methods
FED-STD-751 - Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage

(Copies of specifications, standards, drawings and publications required by the contractor in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

LAWS AND REGULATIONS

US POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, US Government Printing Office, Washington, DC 20402).

2.2 Other publications The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issues in effect on date of invitation for bids or request for proposal shall apply:

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT
National Motor Freight Classification

(Application for copies should be addressed to American Trucking Associations, Attn: Traffic Order Section, 1616 P Street, NW Washington, DC 20036).

UNIFORM CLASSIFICATION COMMITTEE, AGENT
Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Navy Clothing and Textile Research Facility, Natick, MA 01760 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:48Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Guide sample Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variation from this specification may appear in the sample in which case this specification shall govern.

3.2 First article approval When specified (see 6.2), the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3).

3.3 Materials

*3.3.1 Cotton mesh The mask base cloth shall be unbleached oxford woven cotton cloth conforming to the requirements specified in Table I when tested as specified in 4.4.1.

Table I - Physical requirements

Minimum yarn per inch (minimum yarn per centimeter)		Weight Minimum ounces per square yard (Minimum kilograms per square meter)
Warp	Filling	
44 (17)	21 (8)	5.5 (.18)

*3.3.2 Cotton flannel The cotton flannel cloth shall conform to type IV, class 2 of CCC-C-458. The napped side shall be the face side.

*3.3.3 Tape, cotton The tape for binding shall be strip-form, bias-cut, unbleached, plain or twill woven cotton cloth 1 1/4 inches (31.75mm) wide. The minimum yarns per inch (yarns per centimeter) shall be 64 (25) in the warp direction and 55 (22) in the filling direction. The minimum weight per square yard (kilograms per square meter) shall be 2.7 ounces (.0918). A Certificate of Compliance shall be submitted for these requirements.

3.3.4 Webbing, cotton elastic The elastic cotton webbing adjustment strap shall be unbleached, 1/2 inch (12.7mm) wide, conforming to type 1, class 1 of JJ-W-155 except that water repellent and mildew resistant treatments are not required.

3.3.5 Metal slide The metal slide for adjustment strap shall conform to part No. 171 or No. 34 (AG EYE) or functional equivalent and shall be nickel plated brass or steel (see 6.4 and 6.5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:48Z
Check the source to verify that this is the current version before use.

3.3.6 Thread, cotton The thread shall conform to type 1A1, 3 ply, ticket no. 40 of V-T-276.

*3.3.7 Label The identification label shall conform to type IV, class 4 of DDD-L-20 except that the characters shall be not less than 18 point in height. The printing shall show fastness to laundering and shall have the following inscription:

MASK, ANTIFLASH (100% Cotton)

Contract No: DLA-100-00-0-0000 (Example)
Stock No: 8415-00-000-0000 (Example)
Name of Contractor:

3.4 Description The face mask shall be shield shaped with an adjustable elastic webbing (see figure 1).

3.4.1 Figures The figure 1 is furnished for information purposes only. To the extent of any inconsistencies between the written specification and the figures, the written specification shall control.

3.5 Patterns Standard patterns to be used to cut working patterns will be furnished by the Government (see 6.3). The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way.

3.5.1 List of pattern parts The component parts of the mask shall be cut from materials as specified and in accordance with the following pattern parts:

Materials	Pattern parts	Cut parts
Cloth, mesh	Face	1
Flannel, cotton	Liner	1

3.6 Construction

3.6.1 Stitches, seams and stitching Stitch, seam and stitching types specified in Table II shall conform to FED-STD-751. Whenever two or more methods for seam or stitch types are given for the same part of the operation, any one may be used.

3.6.2 Thread breaks, skipped stitches, runoff stitches and ends of seams Ends of all seams and stitching, when not caught in other seams or stitching, shall be backstitched no less than 1/2 inch (12.7mm). The ends of a continuous line of stitching shall be overlapped no less than 1/2 inch (12.7mm). Thread breaks and two or more consecutively skipped or runoff stitches shall be over stitched no less than 1/2 inch (12.7mm) beyond the defective area. Skipped stitches or thread breaks may be repaired by using 301 stitch type.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:48Z
Check the source to verify that this is the current version before use.

3.6.3 Stitches per inch The minimum and maximum number of stitches per inch shall be as specified in Table II.

3.7 Manufacturing operations requirements The mask shall be manufactured in accordance with the operation requirements specified in Table II. The contractor is not required to follow the exact sequence of operations listed provided that the finished masks are identical to those produced by the following sequence of operations listed in Table II.

3.8 Measurements The finished masks shall measure 7 1/4 to 7 3/4 inches (18.4 to 19.7cm) across the top edge and 8 1/4 to 8 3/4 inches (21.0 to 22.2cm) long (measured on the centerline of the mask).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:48Z
Check the source to verify that this is the current version before use.

Table II - Construction of mask

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
1.	Cutting Cut the mask in strict accordance with patterns furnished which show size and shape of component parts					
2.	Replacement of defective components During the spreading, cutting and manufacturing process, components having material defects or damages that are classified as defects in section 4 of this specification shall be removed from production and replaced with non-defective components.					
3.	Make mask a. Form a 1/2 inch (12.7mm) wide pleat at the top of the face piece extending down the center and ending in a point approximately 1 1/2 inches (3.8cm) from the top. Stay-stitch the top of the pleat.					
	b. Position the flannel liner, face down, over the outside of the face piece, aligned the top edges, and stitch top edge 1/4 to 3/8 inch (6.4 to 9.5mm) from edge. Turn liner to finished position.	301	SSa-1	10-12	40/3	40/3
	c. Turn under the long raw edge of the liner 1/4 inch (6.4mm) and stitch to the face piece, 1/16 to 3/16 inch (1.6 to 4.8mm) from the folded edge.	301	LSd-1	10-12	40/3	40/3
	d. Bind the edge of the mask, except the top edge, leaving approximately 1 inch (2.54cm) of tape beyond each top corner of the mask.	301	BSc-1	10-12	40/3	40/3

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:48Z
Check the source to verify that this is the current version before use.

Table II - Construction of mask (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
3.	Make mask (cont'd) e. Cut a length of webbing (see 3.3.4) 27 1/2 to 28 1/2 inches (69.8 to 72.4cm) long.					
	f. Turn free ends of tape binding to outside of mask. Position on the outside of the mask, the webbing (operation 3e) approximtely 1/2 inch (12.7mm) below the top edge of the mask, extending the end of the webbing approximately 3 inches (7.6 cm) to the right of the mask. Stitch the webbing through the face mask 3/8 inch (9.5mm) gauge, 1/16 inch (1.6mm) from the edges, catching the ends of binding in the rows of stitching.	301	SSau-2	10-12	40/3	40/3
	Note: (1) Folded edges to finish on outside and away from the wearer. (2) The metal slide shall finish in between the stitching and folded edge.					
	g. Thread the short end of webbing through the closed end and bar of the metal slide (see 3.3.5), turn under end approximately 1/2 inch (12.7mm), tack or bartack across full width of webbing 3/8 inch (9.6mm) from the folded edge.	301 or Bartack	EFa-1	10-12 28 per Bartack	40/3 40/3	40/3 40/3
	h. Thread the long end of webbing through the center opening of the metal slide, turn under end approximately 1/2 inch (12.7mm), tack or bartack full width of webbing 3/8 inch (9.6mm) from the folded edge.	301 or Bartack	EFa-1	10-12 28 per Bartack	40/3 40/3	40/3 40/3
4.	Label Place marking in either upper corner of the mask on the outside and below the webbing.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:48Z
Check the source to verify that this is the current version before use.

Table II - Construction of mask (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
5.	Clean mask a. Trim all thread ends. b. Remove all loose threads. c. Remove all spots and stains.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:48Z
Check the source to verify that this is the current version before use.

3.9 Workmanship The finished mask shall conform to the quality established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to the prescribed requirements.

4.1.1 Certificate of compliance Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection When required, the first article submitted in accordance with 3.2 shall be inspected as specified in 4.4.2 for compliance with design, construction, workmanship and dimensional requirements.

4.4 Quality conformance inspection Inspection shall be performed in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated herein.

4.4.1 Component and material inspections In accordance with 4.1, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification or applicabl purchase document. In addition, the material listed in Table I shall be tested for the characteristics specified and in accordance with the referenced test methods of FED-STD-191. The values specified in Section 3, except where otherwise specified, apply to the average of the determinations made on the sample unit for test purposes as specified in the applicable test methods. All test reports shall contain the individual values utilized in expressing the final results. The sample unit for test purposes shall be one yard full width of material. The lot size shall be expressed in units of yards. The lot shall

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:48Z
Check the source to verify that this is the current version before use.

unacceptable if one or more sample units fail to meet any of the test requirements specified. The sample size shall be in accordance with the following:

Lot size (yards)	Sample size (units)
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

Table III - Test methods

Component	Characteristic	Requirement	Test method
Cotton, mesh	Yarn/inch	Table I	5050
	Weight	Table I	5041

4.4.2 Examination of the end item Examination of the end item shall be in accordance with 4.4.2.1 and 4.4.2.2. The applicable inspection levels and acceptable quality levels (AQL's) shall be as indicated in 4.4.2.3. The sample unit shall be one finished mask. The lot size shall be expressed in units of masks.

4.4.2.1 Visual examination The masks shall be examined for defects classified in accordance with the list below:

Defect	Classification Major	Minor
MATERIAL DEFECTS AND WORKMANSHIP		
a. Any hole, needle chew, cut or tear	X	
b. Any weakening defect such as smash or float	X	
c. Any visible mend	X	
CLEANNESS		
a. Any spot or stain		X
b. Thread ends not trimmed		X
COMPONENTS AND ASSEMBLY		
Any component part or operation omitted (unless otherwise classified herein)	X	
CUTTING		
Not cut in accordance with patterns or with specification requirements	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:48Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
SEAMS AND STITCHING		
a. Accuracy of seaming		
1. Seam puckered, twisted or pleated (unless otherwise classified herein)		X
2. Ends of all seams and stitching when not caught in another seam or stitching back-tacked less than 1/2 inch (12.7mm)		X
3. Thread breaks not secured or stitched back of the break less than 1/2 inch (12.7mm)		X
b. Gauge of stitching		
1. Irregular, i.e., unevenly gauged not uniform		X
2. Beyond range of width specified		X
c. Open seam or runoff		
1. Up to 1/4 inch (6.4mm) inclusive		X
2. More than 1/4 inch (6.4mm)	X	
NOTE: One or more broken stitches or two or more continuous skipped or runoff stitches constitute an open seam.		
d. Raw edges		
1. More than 1/4 inch (6.4mm) to and including one inch (2.54cm)		X
2. More than 1 inch (2.54cm)	X	
e. Seam and stitch types		
Not specified seam or stitch type		X
f. Stitch tension		
1. Loose tension resulting in loose seam	X	
2. Tight tension (stitches break when normal strain is applied to the seam or stitching)	X	
g. Stitches per inch		
1. One stitch less than the minimum or any number in excess of the maximum specified		X
2. Two or more stitches less than the minimum specified	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:48Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
LABEL		
a. Missing, incorrect or illegible	X	
b. Misplaced		X
c. Not type specified		X

4.4.2.2 Dimensional examination The masks shall be examined for conformance to the measurements specified in 3.8. Any measurement not within the specified tolerance shall be considered a defect. The sample unit shall be one finished mask. The lot size shall be expressed in units of finished masks.

4.4.2.3 Inspection levels and acceptable quality levels The inspection levels and acceptable quality levels (AQL's) expressed in defects per 100 units (DHU) shall be as follows:

	AQL's	Inspection level
For defects listed in 4.4.2.1		
Major defects	2.5	II
Total defects (Major and Minor combined)	15.0	II
For defects listed in 4.4.2.2		
One class	4.0	S-3

4.4.2.4 Examination of packaging requirements An examination shall be made to determine that packaging, packing, and marking comply with section 5 requirements of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery except that it need not be closed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per 100 units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:48Z
Check the source to verify that this is the current version before use.

Examine	Defect
Marking (exterior and interior	Omitted, incorrect, illegible, of improper size, location, sequence or method of application.
Material	Any component missing, damaged or not as specifi
Workmanship	Inadequate application of components, such as, incomplete closure of container flaps, loose strapping, improper taping, inadequate stapling, bulged or distorted container.
Content	Number of masks per bundle and container is more or less than required. 1/

1/ For this defect, three (3) bundles shall be examined from each shipping container in the sample.

5. PACKAGING

5.1 Preservation-packaging Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A Twenty-five masks shall be neatly stacked, one on top of the other, with every five masks reversed end to end to form a bundle. Each bundle shall be securely cross tied with cotton tape or twine.

5.1.2 Level C Commercial packaging Masks shall be packaged to afford adequa protection against physical damage during shipment from the contractor to the first receiving activity. The package and the quantity per package shall be the same as normally used by the contractor for retail distribution.

5.2 Packing Packing shall be Level A, B, or C as specified (see 6.2).

5.2.1 Level A Twelve hundred masks, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to RSC-L, grade V2s of PPP-B-636. The inside of each shipping container shall be fitted with a taped box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Level A bundles shall be packed flat, three in length and two in width and eight in depth. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper. Each shipping container shall be closed, waterproofed and reinforced in accordance with the appendix of the container specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:48Z
Check the source to verify that this is the current version before use.

5.2.2 Level B Twelve hundred masks, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, type CF, variety SW or SF, class domestic, grade 275 of PPP-B-636. The inside of each shipping container shall be fitted with a taped box liner conforming to type CF, class domestic, variety DW, grade 200 of PPP-B-636. Level B bundles shall be packed flat, three in length, two in width and eight in depth. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper. Each shipping container shall be closed in accordance with method II as specified in the appendix of the container specification.

5.2.2.1 When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with the appendix of the container specification.

5.2.3 Level C (Commercial packing) Masks, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transporation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Container shall comply with the US Postal Service Manual, Uniform Freight Classification Rules, or National Motor Freight Classification Rules, as applicable.

5.3 Marking In addition to any special marking required by the contract, shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use This mask is designed to protect personnel from transient elevated air temperatures resulting from offensive use of high explosive weapon

6.2 Ordering data Procurement documents should specify the following:

a. Title, number and date of this specification.
b. First article sample requirements (see 3.2).
c. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
d. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

6.3 Samples and patterns For access to guide samples and patterns, address the procuring office issuing the invitation for bids (see 3.1 and 3.5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:48Z
Check the source to verify that this is the current version before use.

6.4 Hardware components specified are available from either Kings Point Manufacturing Company, 171 Great Neck Rd., Great Neck, Long Island, New York 10021, part number 171, or from Waterbury Buckle Company, 962 South Main Street, Waterbury, CN 06706, part number 34 (AG EYE) or a functionally interchangeable equivalent (see 6.5).

6.5 Equal item Prior to the use of a "Functionally interchangeable" item, the contractor shall submit the item with supporting data to the contracting officer for subsequent approval or disapproval by the responsible Military Agency.

6.6 Changes from previous issue The margins of this specification are marked with an asterisk to indicate where additions, modifications, corrections and deletions from the previous issue were made. This was done as a convenience only, and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Navy - SA


Review activity:
Navy - SH
DLA - CT

User activity:
Navy - CG

Preparing activity:
Navy - SA

Project No. 8415-0889

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:48Z
Check the source to verify that this is the current version before use.

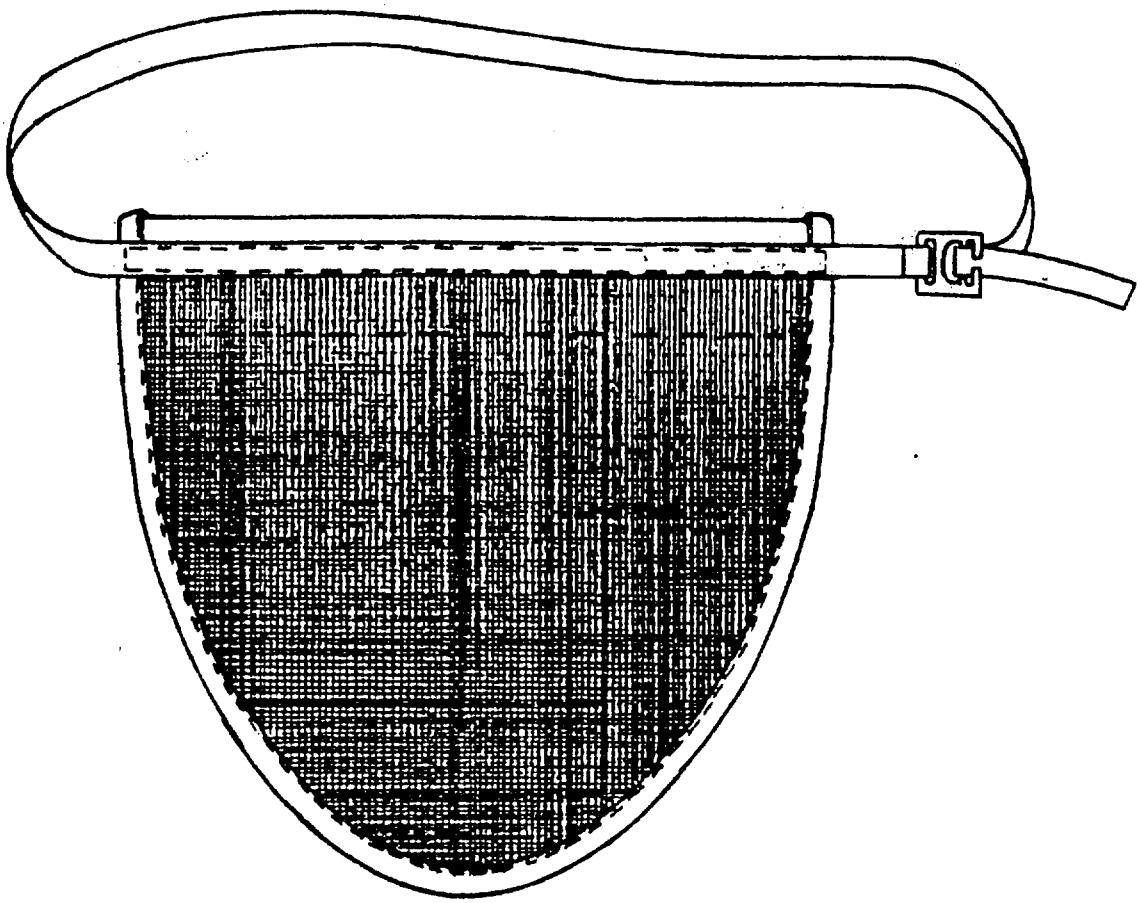

OUT SIDE

FIGURE 1 MASK, ANTIFLASH

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:48Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use i submitting comments and suggestions for improvements. All users of military standardization documents are invited to provid suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, an mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, w too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAG
NECESSAR
IF MAILED
IN THE
UNITED STA

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Officer in Charge
Navy Clothing & Textile Research Facility
(Code 50)
21 Strathmore Road
Natick, MA 01760

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:48Z
Check the source to verify that this is the current version before use.

(TO DETACH THIS FOR PUT A LONG THIS LINE.)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 1426 8 / MAR PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil – Downloaded: 2026-10-16T15:48Z
Check the source to verify that this is the current version before use.