FED. SUP CLASS
6240

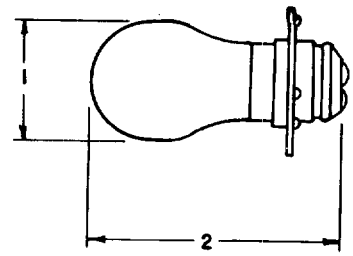

Characteristic

Ⓑ Industry No.	Ⓑ BGB/BGK
Amperes	0.75
Volts	4
Bulb	S-8
Finish	Clear
Base	Candelabra, prefocusing, double contact
Filaments	C-6
Light center length (inches) 1/	1-1/8
Hours life (approximate)	50
Lumen output (approximate)	28

1/ Distance from center of light source to plane of locating bosses of prefocusing collar.

Ⓑ Deleted use, type number, and FIIN number.

Ⓒ CANCELED AFTER 28 MAY 1987.
NO SUPERSEDING STANDARD.

APPROVED 2 AUG 1954 REVISED Ⓐ 27 JUN 1956 Ⓑ 3 APR 1978 Ⓒ 28 MAY 1987

This military standard is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

Project 6240-N387

MS part number
MS15532-1

Ⓑ Denotes changes

P. A. SH Other Cust	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
		LAMP, INCANDESCENT, S-8, CANDELABRA, PREFOCUSING, DOUBLE CONTACT	MS15532(SH)
PROCUREMENT SPECIFICATION: None	SUPERSEDES:		Page 1 OF 1

DD FORM 672-1 (LIMITED COORDINATION) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

AMSC N/A

FSC 6240

DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited

☆U.S. GOVERNMENT PRINTING OFFICE: 1978—703-122/1753

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:48Z
Check the source to verify that this is the current version before use.