FED. SUP CLASS
4820

(B)

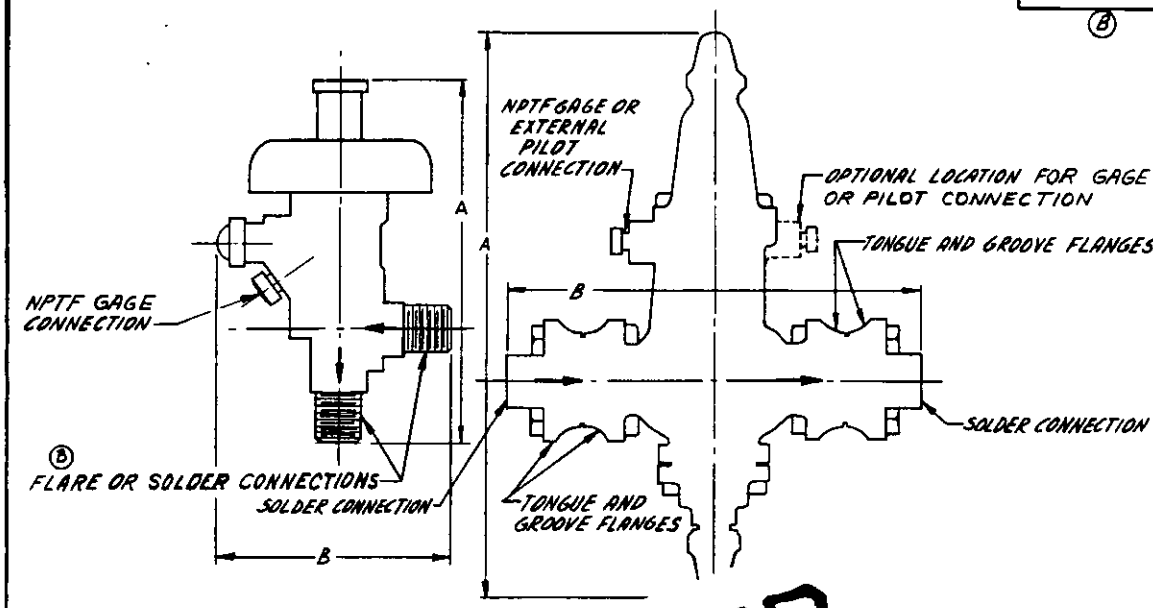

TYPE I
ANGLE PATTERN

DASH NUM	CAPAC IN BT		
			1/8
		1/8	1/4
-4	SOLDER WITH OR WITHOUT FLANGES	1 1/8	1/4

CANCELLED

CANCELLED AFTER 4 FEBRUARY 1985, NO SUPERSEDING STANDARD

NOTES

1. RATING CONDITION 135F (SATURATED) CONDENSING TEMPERATURE HAVING VAPOR-FREE LIQUID ENTERING EXPANSION VALVE AT 125F.
2. SETTING ADJUSTABLE FROM ZERO P.S.I.G. TO 35 P.S.I.G. PLUS OR MINUS 5 P.S.I.G.
3. FLARE CONNECTION IN ACCORDANCE WITH MS-35873.
4. SOLDER CONNECTION IN ACCORDANCE WITH MS-35925.
5. NPTF IN ACCORDANCE WITH MS-35926 or MS-35868.
6. DIMENSIONS IN INCHES.
7. REFERENCED DOCUMENTS SHALL BE THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS OR REQUEST FOR PROPOSAL.
8. FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
(B) 9. PART NUMBERS: THE MS PART NUMBER CONSISTS OF THE MS NUMBER PLUS THE DASH NUMBER. EXAMPLE: MS 17854-1.
(C) CANCELLED

P.A. ARMY - GL Other Cust NAVY - YD USAF - 82	TITLE VALVES, REGULATING, FLUID PRESSURE, EVAPORATOR, REFRIGERANT-12	MILITARY STANDARD MS 17854
PROCUREMENT SPECIFICATION MIL-V-23318	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 57 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

APPROVED 5 JUNE 1962 REVISED (A) 18 MAR 1963 (B) 16 MAY 1975 (C) 4 FEBRUARY 1985

Revies
Army - MD
Navy
DSA - GS, CS

User
CE, SM
MC

This Military Standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:10Z
Check the source to verify that this is the current version before use.