PROJECT NO. 5945-N-181

FED. SUP CLASS
5945

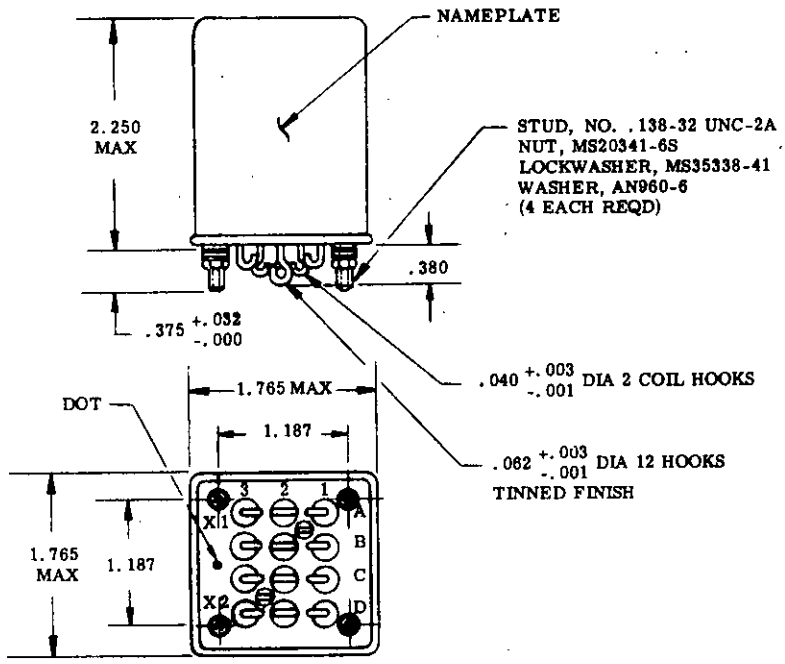

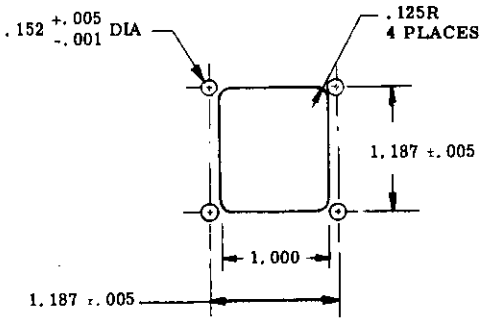

SUGGESTED MOUNTING HOLE LAYOUT

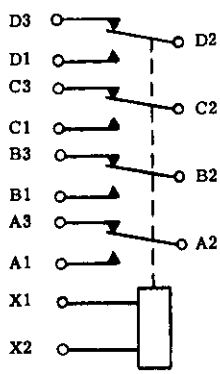

-1 CIRCUIT

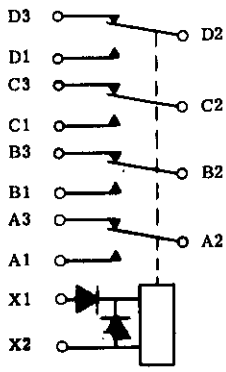

-2 CIRCUIT

THE USE AND ARRANGEMENT OF DIODES IS OPTIONAL. ACTUAL APPLICATION MUST BE SHOWN ON LABEL
(SEE SPECIFICATION)

TABLE I

MS PART NO.	TYPE	COIL TYPE	TERMINAL TYPE	MOUNTING OR MATING SOCKET	AUXILIARY CONTACTS	MAX WEIGHT IN POUNDS
MS21035-1 3/	I	DC	SOLDER HOOK	STUD	NONE	0.5
MS21035-2 3/	I	AC	SOLDER HOOK	STUD	NONE	0.5

FOR NOTES SEE SHEET 6

(A) CANCELED AFTER 10 APRIL 1981. NO SUPERSEDING STANDARD.

P.A.
NAVY - AS
Other Cust
USAF - 80
ARMY - EL

TITLE
RELAY, 4 PDT HERMETICALLY SEALED.
RATING: NON LOAD TRANSFER - 10 AMP.
RATING: 3 PHASE LOAD TRANSFER - 5 AMP.

MILITARY STANDARD
MS21035

PROCUREMENT SPECIFICATION
MIL-R-6106

SUPERSEDES

SHEET 1 OF 1

DD FORM 1 MAR 72 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO 23065

☆U.S.GOVERNMENT PRINTING OFFICE: 1981 — 703-023/2678

APPROVED 24 NOV 75 REVISED (A) 10 APRIL 1981

USER SYMBOLS:

REVIEWER SYMBOLS:

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:25Z
Check the source to verify that this is the current version before use.