FED. SUP CLASS
3120

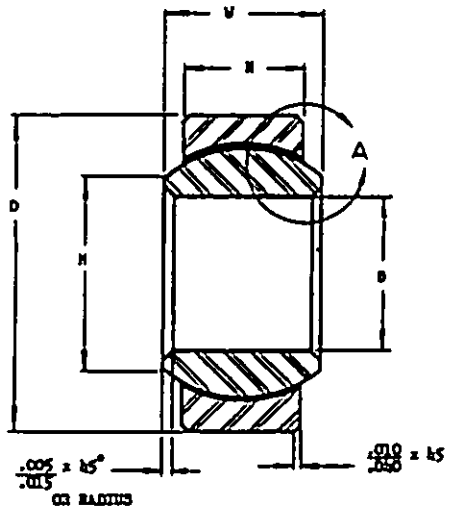

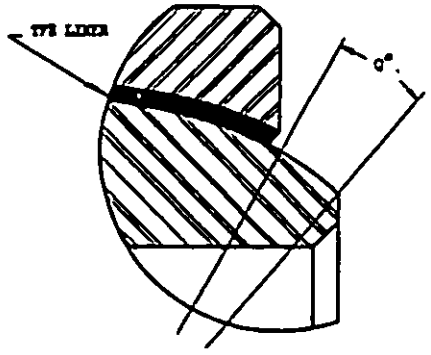

DETAIL A

DASH NO.	B +.0000 -.0005	D +.0000 -.0005	H ±.005	H - MIN	Q MIN	W +.000 -.003	STATIC LIMIT LOAD RADIAL LB	STATIC LIMIT LOAD AXIAL LB	OSCILLATING LOAD LB	NO-LOAD BREAKAWAY TORQUE IN-LB	WT. LB MAX
3	.1900	.5625	.218	.193	10	.281	3975	150	1500	.5-5	.020
4	.2500	.6562	.250	.264	10	.343	6040	430	2320		
5	.3125	.7500	.281	.329	10	.375	8750	700	3430		.030
6	.3750	.8125	.312	.475	9	.406	10540	1100	4200		.040
7	.4375	.9062	.343	.530	8	.437	13200	1400	5700	1-5	.050
8	.5000	1.0000	.390	.600	8	.500	17900	2100	7900		.070
9	.5625	1.0937	.437	.670	8	.562	20300	3680	10300		.090
10	.6250	1.1875	.500	.739	8	.625	30500	4720	13400		.120
12	.7500	1.4375	.593	.920	8	.750	44400	6750	18700		.210
14	.8750	1.5625	.703	.980	8	.875	62800	9350	26100	2-8	.270
16	1.0000	1.7500	.797	1.318	9	1.000	82200	12160	34100		.390

MATERIAL: BALL 440C AND 5630

OUTER RING AMS 5643(17-4PH), AMS 5528 (17-7PH), AISI 410.

LINER - SEE PROCUREMENT SPECIFICATION.

FINISH:

SURFACE FINISH, BALL DIA RMS 8 MAX: BORE, BALL FACE, AND OUTER RACE DIA RMS 32 MAX, ALL OTHERS RMS 125 MAX.

HARDNESS: BALL 55-62Rc OUTER RING 25 Rc MIN. Rc 35 MAX

NOTES: DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010 ANGLES ± 1/2°

BREAK ALL SHARP EDGES AND CORNERS AND REMOVE ALL BURRS AND SLIVERS, UNLESS NOTED.

DASH NUMBER DESIGNATES NOMINAL BORE DIAMETER IN SIXTEENTHS OF AN INCH.

EXAMPLE OF PART NO. MS21233-7 - 7/16 BORE

WHEN TESTED IN DE-ICING FLUID THE OSCILLATING LOAD SHALL BE DECREASED TO 80%.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

APPROVED 16 Mar 64 REVISED (A) 15 Nov 65 (B) 3 Aug 67

Review activities: Navy - AS USAF - 11, 68

This military standard is approved by the Department of the Air Force and the Navy Air Systems Command and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

P.A. Navy - AS Other Cust USAF - 11	TITLE BEARING, PLAIN, SELF-ALIGNING, TFE LINED, NARROW	MILITARY STANDARD MS21233(ASG)
PROCUREMENT SPECIFICATION MIL-B-8942	SUPERSEDES:	SHEET 1 OF 1

DD FORM 672-1 (Limited coordination)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:28Z
Check the source to verify that this is the current version before use.