FED. SUP CLASS
5305







SECTION A-A

SPLINE SOCKET

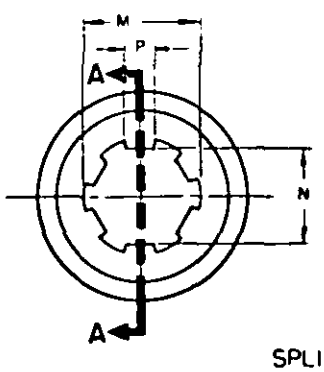


CUP POINT




FLAT POINT

| D | B | C | | H | | N | | P | | NUMBER OF FLUTES | (a) T |
|---|---|---|---|---|---|---|---|---|---|---|---|
| NOMINAL DIA | THREADS PER INCH | CUP AND FLAT POINT DIA | | SOCKET DIA MAJOR | | SOCKET DIA MINOR | | SOCKET LAND AND WIDTH | | | KEY ENGAGEMENT |
| | | MAX | MIN | MAX | MIN | MAX | MIN | MAX | MIN | | MIN |
| .086 | 56UNC-3A | .047 | .039 | .050 | .049 | .041 | .040 | .011 | .010 | 6 | .040 |
| .112 | 40UNC-3A | .061 | .051 | .062 | .061 | .051 | .050 | .014 | .013 | | .045 |
| .138 | 32UNC-3A | .074 | .064 | .074 | .073 | .064 | .063 | .016 | .015 | | .055 |
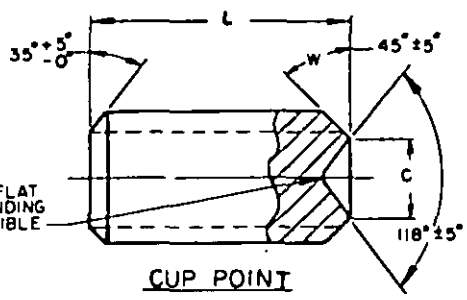
| LENGTH L ±.010 | CUP POINT DASH NO. | | | FLAT POINT DASH NO. | | |
|---|---|---|---|---|---|---|
| | .086-56UNC | .112-40UNC | .138-32UNC | .086-56UNC | .112-40UNC | .138-32UNC |
| 1/16 | 101 | 111 | | 201 | 211 | |
| 3/32 | 102 | 112 | | 202 | 212 | |
| 1/8 | 103 | 113 | 126 | 203 | 213 | 226 |
| 3/16 | 104 | 114 | 127 | 204 | 214 | 227 |
| 1/4 | 105 | 115 | 128 | 205 | 215 | 228 |
| 5/16 | 106 | 116 | 129 | 206 | 216 | 229 |
| 3/8 | | 117 | 130 | | 217 | 230 |
| 7/16 | | 118 | 131 | | 218 | 231 |
| 1/2 | | 119 | 132 | | 219 | 232 |

(a) KEY ENGAGEMENT: THESE DIMENSIONS APPLY TO SCREWS ONE DIAMETER IN LENGTH OR LONGER. FOR SCREWS SHORTER THAN ONE DIAMETER IN LENGTH, SOCKET TO BE AS DEEP AS PRACTICABLE.

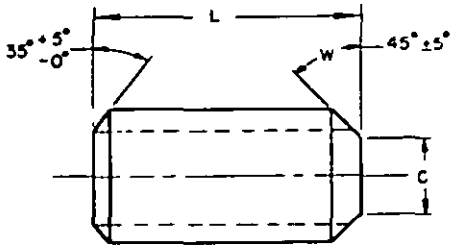*MATERIAL: STEEL, HIGH-GRADE ALLOY, IN ACCORDANCE WITH PROCUREMENT SPECIFICATION.*

HARDNESS: SETSCREWS SHALL BE HARDENED BY HEAT TREATMENT TO ROCKWELL C45 TO 53.

PROTECTIVE COATING: CADMIUM PLATED, IN ACCORDANCE WITH SPECIFICATION QQ-P-416, TYPE II, CLASS 3.

THREADS: THE THREADS SHALL BE IN ACCORDANCE WITH SCREW-THREAD STANDARDS FOR FEDERAL SERVICES HANDBOOK H-28.

*DIMENSIONS: DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED.*

PART NUMBER: THE MS PART NUMBER CONSISTS OF THE MS NUMBER, PLUS THE DASH NUMBER .

CANCELLED AS OF 17 May 1985.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

APPROVED 1 Jul 71 REVISED (A) 17 May 85

This standard has been approved by the Department of the Air Force and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

| P.A. AIR FORCE - 11<br>Other Cust | TITLE<br>SETSCREW, FLUTED SOCKET, ALLOY STEEL, CADMIUM PLATED UNC-3A | MILITARY STANDARD<br>MS21342(USAF) |
|---|---|---|
| PROCUREMENT SPECIFICATION<br>FF-S-200 | SUPERSEDES: | SHEET OF |

DD FORM 1 SEP 66 672-1 (Limited coordination)

EDITION OF 1 SEP 57 MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:36Z
Check the source to verify that this is the current version before use.