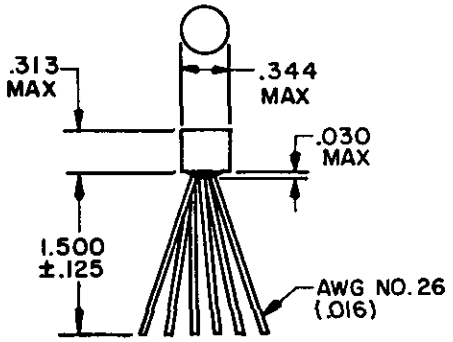

INCHES	MM
.016	.41
.030	.76
.125	3.18
.313	7.95
.344	8.74
1.500	38.10

CIRCUIT DIAGRAM AND MARKING

FREQUENCY RANGE 200 Hz TO 20 kHz
POWER LEVEL: .1 W MAX

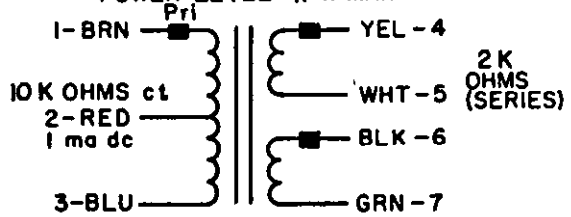

ALTITUDE -150,000 FT
WORKING VOLTAGE-50V
SCHEMATIC

Ⓐ CANCELED AFTER 14 AUGUST 1979
USE MIL-T-27/144-18

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. The number of terminals shall be as shown in schematic.
4. Referenced document shall be of the issue in effect on date of invitation for bids.
5. This standard takes precedence over document referenced herein.
6. For vibration and shock test the specimen shall be rigidly mounted on a printed circuit board.
7. The elevated temperature for thermal shock (step 3, method 107C, MIL-STD-202) shall be the maximum operating temperature for the class.

Ⓐ DENOTES CHANGES

P.A. Air Force-85 Other Cust	INTERNATIONAL INTEREST	TITLE Ⓐ TRANSFORMER, AUDIO FREQUENCY, SUB-MINIATURE, TYPE TF5R21ZZ	MILITARY STANDARD MS21420 (USAF)
Procurement Specifications MIL-T-27	SUPERSEDES:		PAGE 1 OF 1

DD FORM 1 MAY 73 672 *(LIMITED COORDINATION)* PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 5950-F188-21

☆U.S. GOVERNMENT PRINTING OFFICE: 1979-603-022/3311

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:38Z
Check the source to verify that this is the current version before use.

APPROVED 9 MAY 1974 REVISED Ⓐ 14 AUG 79

Review Activity:
AF - 99

This military standard has been approved by the Directorate of Electronic Support (AFALD/PTS), Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.