FED. SUP CLASS
6685

REVIEW ACTIVITY: ARMY-EL
USER ACTIVITY: NAVY-MC

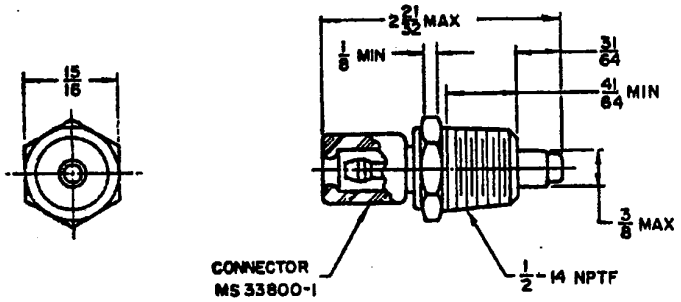

CALIBRATION TABLE		
RESISTANCE OHMS	TEMP. DEGREES F.	CURRENT-MILLIAMPERES NOMINAL
© 2360+10% −15%	120	10.7
710 ±5%	200	26.8
310 ±8%	280	42.6

NOTES:

1. TYPE II (TEMPERATURE) UNIT 2 (TRANSMITTER) OF PROCUREMENT SPECIFICATION.
2. FOR ASSOCIATED INDICATORS - SEE MS24542 AND MS24543.
3. NOMINAL CURRENT GIVEN IN CALIBRATION TABLE IS BASED ON 360 OHMS RESISTANCE IN SERIES WITH TRANSMITTER AND 28.5 VOLTS APPLIED ACROSS THE COMBINATION.
4. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES; TOLERANCES ARE ± 1/64 ON FRACTIONS.
5. THREADS SHALL BE IN ACCORDANCE WITH SCREW THREAD STANDARDS FOR FEDERAL SERVICES-HANDBOOK H28.
6. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
7. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.
8. MARKING SHALL CONSIST OF THE MS PART NUMBER AND MANUFACTURER'S IDENTIFICATION IN ACCORDANCE WITH MIL-STD-130.

APPROVED 27 OCT 1957 REVISED (A) 4 JANUARY 1962 (B) 4 APRIL 1967 (C) 25 SEPTEMBER 1967

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

MS PART NO.	FORMER PART NO.
MS 24537-1	8376489

P.A. ARMY-AT Other Cust NAVY-YD	TITLE TRANSMITTER, TEMPERATURE ELECTRICAL RESISTANCE-24 VOLT DC	MILITARY STANDARD MS 24537
PROCUREMENT SPECIFICATION MIL-T-10986	SUPERSEDES:	SHEET 1 OF 1

DD, FORM 672-1 (Continued)

OBSOLETE

☆ GOVERNMENT PRINTING OFFICE: 1967-301-512/2015

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:56Z
Check the source to verify that this is the current version before use.