This standard has been approved by the BuWep (Department of the Navy) and Department of the USAF and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

FED. SUP CLASS
5305

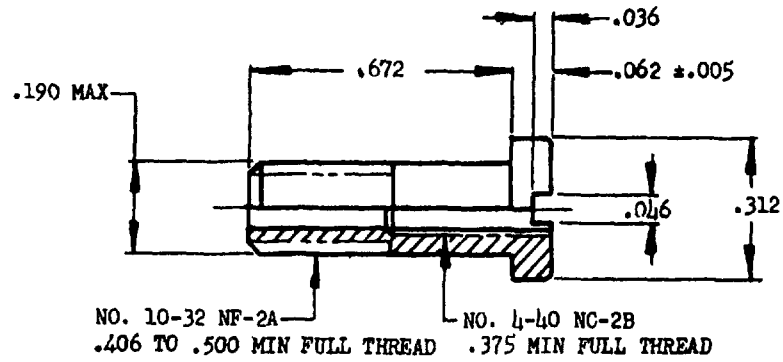

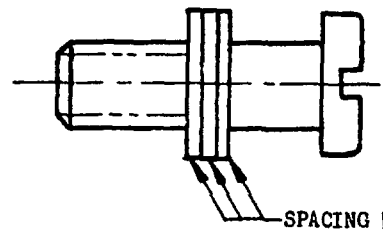

SPACING WASHERS SAME AS AN960-C10L
EXCEPT THICKNESS TO BE .032 ±.002

DASH NO.
-1

MATERIAL. STUD; CORROSION RESISTANT STEEL, QQ-S-763, TYPE FM OR G FOR COLD UPSETTING PROCESS.
FINISH: PASSIVATE.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 1 Nov 60 REVISED

P.A. Navy - Wep	TITLE	MILITARY STANDARD
Other Cust USAF - DAY	SCREW AND WASHER ASSEMBLY; RELAY SOCKET MOUNTING	MS25332(ASG)
Procurement Specification NONE	SUPERSEDES:	SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:08Z
Check the source to verify that this is the current version before use.