FED. SUP CLASS
5945

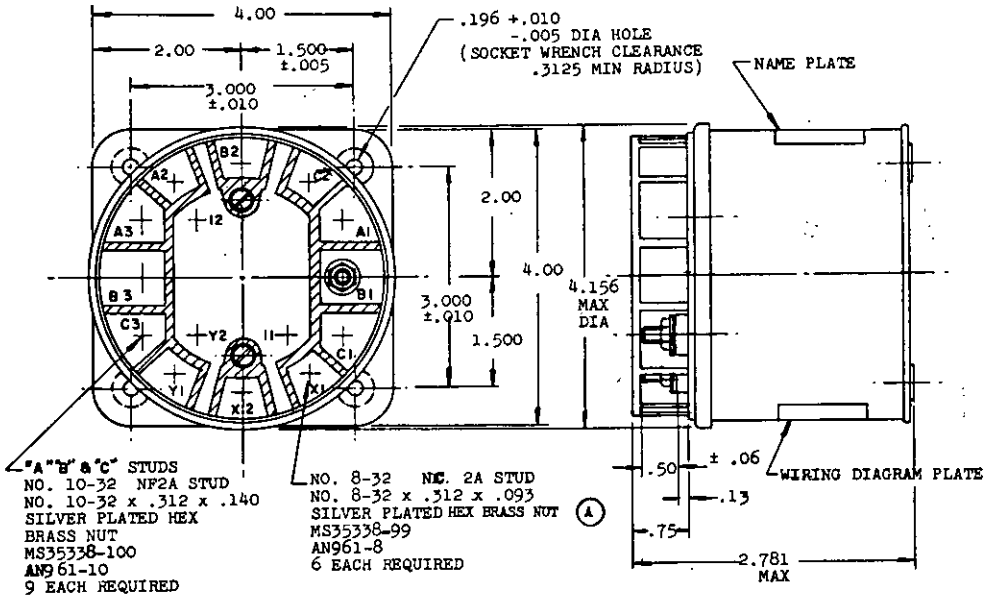

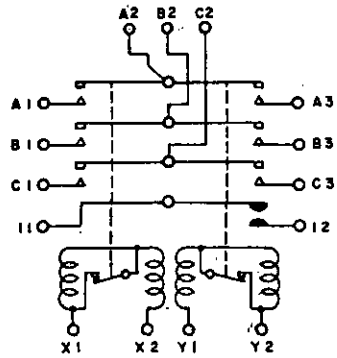

CIRCUIT

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: ±.031.

TERMINAL COVERS AND BARRIERS REQUIRED TO ISOLATE EACH TERMINAL.
WEIGHTS INCLUDE TERMINAL COVERS AND BARRIERS.

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(B) DENOTES CHANGES

(B) CANCELED AFTER 31 JULY 1986 NO SUPERSEDING STANDARD

APPROVED 20 DEC 1965 REVISED (A) 18 Oct 66 (B) 31 JULY 1986

P.A. Navy - AS Other Cust USAF - 85	TITLE RELAY, 60 AMP, 3 PDT, CENTER OFF HERMETICALLY SEALED, CLASS B8	MILITARY STANDARD MS27425(ASG)
PROCUREMENT SPECIFICATION MIL-R-6106	SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 SEP 65 672-1 (Limited coordination) EDITION OF 1 SEP 57 MAY BE USED.

PROJECT NO. 5945-0744-02

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Review activities: USAF - 85 Navy - AS

This military standard is approved by the Department of the Air Force and the Naval Air Systems Command and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:24Z
Check the source to verify that this is the current version before use.