MIL-C-19908D
30 September 1986
SUPERSEDING
MIL-C-19908C
22 September 1978

MILITARY SPECIFICATION

CAPS, FUEL STORAGE TANK

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers general purpose lock type caps for fuel oil and gasoline storage tanks.

1.2 Classification. Cap shall be of the following types, sizes, and styles, as specified (see 6.2.1 and 6.4).

TYPES
- Type I - Internal pipe thread for fill-pipe connection.
- Type II - External pipe thread for fill-pipe connection.

SIZES (see 6.6)
- Size 1 - 2-inch iron pipe size (ips), National Pipe Taper Thread (NPT).
- Size 2 - 3-inch ips NPT.
- Size 3 - 4-inch ips NPT.

STYLES
- Style A - Vented.
- Style B - Air tight.

1.2.1 Part numbers. The specification number, type, size, and style is combined to form the specification part number for the caps covered by this specification (see 1.2.1.1).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commanding Officer (Code 156), Naval Construction Battalion Center, Port Hueneme, CA 93043, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 5430

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

AMSC N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:52Z
Check the source to verify that this is the current version before use.

1.2.1.1 Cataloging data. For cataloging purposes, part numbers for the caps are assigned as follows:

M19902 XXX X

Specification number
Type and size code (see 1.2.1.2)
Style code (see 1.2.1.2)

1.2.1.2 Type, size, and style code. The type and size of the caps are identified by a 3-digit code number and the style is identified by a single alpha character (see Table I).

TABLE I. Type, size, and style to code number.

Types and sizes	Style	Code number	Types and sizes	Style	Code number
Type I			Type II		
Size 1	A	101A	Size 1	A	201A
	B	101B		B	201B
Size 2	A	102A	Size 2	A	202A
	B	102B		B	202B
Size 3	A	103A	Size 3	A	203A
	B	103B		B	203B

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. The following specifications and standards form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATION

MILITARY

MIL-V-3 - Valves, Fittings and Flanges (Except for Systems Indicated Herein) Packaging of.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:52Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

FED-STD-H28 - Screw-Threads for Federal Services Section 7, Pipe Threads, General Purpose.

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.

(Copies of specifications and standards required by contractors in connection with specific acquisition functions should be obtained from the procuring activity or as directed by the contracting activity.)

2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of the documents not listed in the DODISS shall be the issue of the non-Government documents which is current on the date of the solicitation.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

A153 - Zinc-Coating (Hot Dip) on Iron and Steel Hardware.
B580 - Anodic Oxide Coatings on Aluminum.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

30 - Flammable and Combustible Liquids Code.

(Application for copies should be addressed to the National Fire Protection Association, 470 Atlantic Avenue, Boston, MA 02210.)

(Non-Government standards and other publications are normally available from the organizations which prepare or which distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein (except for associated detail specifications, specification sheets or MS standards), the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:52Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Standard commercial product. The caps shall, as a minimum, be in accordance with the requirements of this specification and shall be the manufacturer's standard commercial product. Additional or better features which are not specifically prohibited by this specification but which are a part of the manufacturer's standard commercial product, shall be included in the caps being furnished. A standard commercial product is a product which has been sold or is being currently offered for sale on the commercial market through advertisements or manufacturer's catalogs, or brochures, and represents the latest production model.

3.2 First article. When specified in the contract or purchase order, a sample shall be subjected to first article inspection (see 4.2.1 and 6.3).

3.3 Materials. Materials used shall be free from defects which would adversely affect the performance or maintainability of individual components or of the overall assembly. Materials not specified herein shall be of the same quality used for the intended purpose in commercial practice. Unless otherwise specified herein, all equipment, material, and articles incorporated in the work covered by this specification are to be new and fabricated using material produced from recovered materials to the maximum extent possible without jeopardizing the intended use. The term "recovered materials" means material which have been collected or recovered from solid waste and reprocessed to become a source of raw materials, as opposed to virgin raw materials. None of the above shall be interpreted to mean that the use of used or rebuilt products are allowed under this specification unless otherwise specified.

3.3.1 Cast iron. When specified (see 6.2.1), the body and cover of the cap shall be iron castings. The castings shall be either gray cast iron, ductile iron, or malleable cast iron conforming to the requirements of this specification and shall be zinc-coated in accordance with ASTM A153.

3.3.2 Cast aluminum. When specified (see 6.2.1), the body and cover of the cap shall be aluminum castings conforming to the requirements of this specification and shall be anodized conforming to type A, ASTM B580.

3.3.3 Cast brass or cast bronze. When specified (see 6.2.1), the body and cover of the cap shall be either brass or bronze castings conforming to the requirements of this specification.

3.3.4 Iron, brass, or bronze adapters. The Adapter A bushing shall be cast iron, brass, or bronze as specified (see 6.2.1). Unless otherwise specified (see 6.2.1), the Adapter B threaded reducer shall be of cast iron.

3.4 Design.

3.4.1 Type I. The Type I cap shall be designed to have internal NPT of the size specified (see 3.4.3 and 6.2.1), for connecting to a fill pipe.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:52Z
Check the source to verify that this is the current version before use.

3.4.2 Type II. The Type II shall be designed to have external NPT of the size specified (see 3.4.3 and 6.2.1), for connecting to a fill pipe.

3.4.3 Sizes.

3.4.3.1 Size 1. The Size 1 shall be designed to fit a standard 2-inch ips fill pipe.

3.4.3.2 Size 2. The Size 2 shall be designed to fit a standard 3-inch ips fill pipe.

3.4.3.3 Size 3. The Size 3 shall be designed to fit a standard 4-inch ips fill pipe.

3.4.4 Styles. The Style A shall be designed to vent to the atmosphere. The Style B shall be designed to be airtight and non-vented. The style of the cap shall be as specified (see 6.2.1).

3.4.5 Adapters.

3.4.5.1 Adapter A. When specified (see 6.2.1), an Adapter A (bushing) shall be provided. The bushing shall be designed to adapt a 1-1/2-inch ips fill pipe to a Type I, Size 1 cap.

3.4.5.2 Adapter B. When specified (see 6.2.1), an Adapter B (threaded reducer) shall be provided. The threaded reducer shall be designed to adapt a 1-1/2-inch ips fill pipe to a Type II, Size 1 fill cap.

3.5 Construction.

3.5.1 Style A. The cap shall be of construction similar to the illustrations shown in Figure 1. Figure 1 is for illustrative purposes and is not intended to preclude the acquisition of caps otherwise conforming to this specification. The body shall have a hinge lug and an eye lug positioned at opposite sides. The cover shall be permanently joined to the body by a hinge pin proportionate to the size of the cap. The hinge pin shall be peened or enlarged to prevent removal. The pin shall be of stainless steel or other corrosion-resistant metal of strength equal to the hinge and eye lug. The hinge bearing holes shall be accurately aligned. The lug of the cover shall fit the lug of the body in such a manner that a padlock with a shackle of not less than 3/8 inch in diameter passed through the eye shall prevent the cover from being opened. The body shall be vented at the rim, and the sides of the cover shall overlap the sides of the body to prevent entry of rain falling at a 45-degree angle from vertical. The body shall be threaded at the base for threading onto a fill pipe as specified for types I and II. Threads shall be as specified in 3.6. Flat surfaces or lugs shall be provided on the outside periphery of the body for use of smooth jaw or spanner wrenches for tightening. Unless otherwise specified (see 6.2.1), the cap and body shall conform to NFPA 30 requirements for vented fill caps.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:52Z
Check the source to verify that this is the current version before use.

3.5.2 Style B. The cap shall be of construction similar to the illustrations shown in Figure 2. Figure 2 is for illustrative purposes and is not intended to preclude the acquisition of caps otherwise conforming to this specification. Closing the cap shall be by either cam and lever, screw-on, or mating twist-lock lugs. The body shall provide a sealing surface; cam grooves, threads, notches, flanges, or lugs to receive the lid with mating parts. To facilitate locking, matching eyes on the lid and the body shall be provided to receive a padlock with a shackle of not less than 3/8-inch in diameter. The sealing gasket provided shall be Buna-N for gasoline and diesel fuel tanks and Viton-A for jet fuel tanks and shall provide an air-tight seal when the cap is closed and locked. Where cams and cam levers are used, the cam levers shall be of corrosion-resistant steel or high-strength brass compatible with the mating parts. Cam lever hinge pins shall be of stainless steel or other corrosion-resistant metal of strength equal to the lever hinge eye. The hinge pin shall be peened or enlarged to prevent removal. The body shall be threaded at the base for threading onto a fill pipe as specified for types I and II. Threads shall be as specified in 3.6. The cap and body construction shall have a pressure rating of not less than 5 pound-force per square inch (psi) and not greater than 9 psi. Unless otherwise specified (see 6.2.1), the cap and body shall conform to NFPA 30 requirements for air-tight fill caps.

3.5.3 Adapter A. The Adapter A bushing shall be hexagon with 1-1/2-inch internal pipe threads NPT and 2-inch external pipe threads NPT. Threads shall be as specified in 3.6. The pressure rating of the bushing shall be not less than 5 psi and not greater than 9 psi.

3.5.4 Adapter B. The Adapter B threaded reducer shall have 1-1/2-inch internal pipe threads NPT at one end and 2-inch internal pipe threads NPT at the opposite end. Threads shall shall be as specified in 3.6. The pressure rating of the reducer shall be not less than 5 psi and not greater than 9 psi. When the reducer is fabricated from cast iron, it shall be zinc coated by the hot-dip process in accordance with ASTM A153, and shall be so treated as to be thoroughly coated with a smooth, bright adherent solid surface of zinc. The fitting shall be zinc-coated both inside and outside. The fitting shall be coated before threading.

3.6 Threads. All threads shall be right hand and shall be smooth, clean, and true to form. All threads shall conform to FED-STD-H28 for NPT, except for the manufacturer's selection of threads for a screw-on cap to the body.

3.7 Performance.

3.7.1 Pressure.

3.7.1.1 Style B caps. The Style B caps shall be capable of withstanding pressure of not less than 5 psi and not greater than 9 psi.

3.7.1.2 Adapters. The Adapter A and Adapter B shall be capable of withstanding pressure of not less than 5 psi and not greater than 9 psi. (see 4.6.1 and 4.6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:52Z
Check the source to verify that this is the current version before use.

3.8 Identification marking. Identification shall be permanently and legibly marked directly on the cap or on a corrosion-resisting metal plate securely attached to the cap at the source of manufacture. Identification shall include the manufacturer's model and serial number, name and trademark to be readily identifiable to the manufacturer.

3.9 Workmanship. All sharp edges and corners shall be removed. All sealing surfaces and mating parts shall fit without binding and be properly aligned. All cam surfaces and mating grooves shall be dressed to provide smooth and easy operation. All mating locking eyes and lugs shall be dressed to eliminate sharp or rough surfaces and be properly aligned.

3.9.1 Welding. Welding procedures shall be in accordance with a nationally recognized welding code. The surface of parts to be welded shall be free from rust, scale, paint, grease, or other foreign matter. Welds shall be of sufficient size and shape to develop the full strength of the parts connected by the welds. Welds shall transmit stress without permanent deformation or failure when the parts connected by the weld are subjected to proof and service loadings.

3.9.2 Castings. All castings shall be sound and free from patching, misplaced coring, warping, or any other defect which reduces the castings ability to perform its intended function.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Component and material inspection. Components and materials shall be inspected in accordance with all the requirements specified herein and in applicable referenced documents.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:52Z
Check the source to verify that this is the current version before use.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.2.1).
b. Quality conformance inspection (see 4.2.2).

4.2.1 First article inspection. The first article inspection shall be performed on one complete cap when a first article is required (see 3.2 and 6.2.1). This inspection shall include the examination of 4.4, the tests of 4.5.1, and, when specified, the preproduction pack inspection of 4.7 (see 4.7 and 6.2.1). The first article may be either a first production item or a standard production item form the supplier's current inventory provided the item meets the requirements of the specification and is representative of the design, construction, and manufacturing technique applicable to the remaining items to be furnished under the contract.

4.2.2 Quality conformance inspection. The quality conformance inspection shall include the examination of 4.4 and the tests of 4.5.2, and the packaging inspection of 4.7. This inspection shall be performed on the samples selected in accordance with 4.3.

4.3 Sampling. Sampling and inspection procedures shall be in accordance with MIL-STD-105. The unit of product shall be one complete cap of the type required. All caps offered for delivery at one time shall be considered a lot for the purpose of inspection. If an inspection lot is rejected, the contractor may rework it to correct the defects, or screen out the defective units, and resubmit for a complete reinspection. Resubmitted lots shall be reinspected using tightened inspection. If the rejected lot was screened, reinspection shall be limited to the defect causing rejection. If the lot was reprocessed, reinspection shall be performed for all defects. Rejected lots shall be separate from new lots, and shall be clearly identified as reinspected lots.

4.3.1 Sampling for examination. Examination shall be based on inspection level II and an Acceptable Quality Level (AQL) of 2.5 percent defective.

4.3.2 Sampling for Tests. Tests shall be based on inspection level S-3 and AQL of 4.0 percent defective.

4.4 Examination. Each sample selected in accordance with 4.3 shall be examined for compliance with the requirements in section 3 of this specification. Any redesign or modification of the contractor's standard product to comply with specified requirements, or any necessary redesign or modification following failure to meet specified requirements shall receive particular attention for adequacy and suitability. This element of inspection shall encompass all visual examinations and dimensional measurements. Noncompliance with any specified requirements or presence of one or more defects preventing or lessening maximum efficiency shall constitute cause for rejection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:52Z
Check the source to verify that this is the current version before use.

4.5 Tests.

4.5.1 First article tests. The first article sample shall receive the tests of 4.6 when a Style B cap and Adapters A or B are being furnished. Failure of the first article to pass any of the tests shall constitute cause for rejection.

4.5.2 Quality conformance tests. Each sample of Style B caps and Adapter A or Adapter B, selected in accordance with 4.3, shall receive the test of 4.6.1 or 4.6.2 as applicable. Failure to pass the applicable test shall be cause for rejection of the lot.

4.6 Test methods.

4.6.1 Air pressure test. Selected samples of the Style B caps, Adapter A, and Adapter B shall be subjected to an air-pressure test of not less than 5 psi and not greater than 9 psi while the sample(s) are under water or under another suitable medium. The sample(s) shall not leak air at any part of the surface.

4.6.2 Alternate pressure test. As an alternate test, not less than 5 psi and not greater than 9 psi pressure rated sample(s) may be subjected to a hydrostatic pressure test of not less than 5 psi and not greater than 9 psi for not less than 1 minute. Under the hydrostatic pressure test, the sample(s) shall not leak or sweat at any part of the surface.

4.7 Packaging inspection. The preservation, packaging, packing, and marking of the item shall be in accordance with the requirements of section 4 of MIL-V-3 for fittings. This inspection shall consist of the quality conformance inspection; and, when specified (see 6.2.1), a preproduction pack shall be furnished for examination and test within the time frame required (see 6.2.1).

5. PACKAGING

5.1 Preservation, packing, and marking. Preservation, packing, and marking shall be in accordance with the requirements of MIL-V-3, for fittings, with the level of preservation and packaging and the level of packing as specified (see 6.2.1).

6. NOTES

6.1 Intended use. The caps are intended for use on diesel, gasoline, and jet fuel storage tank fill pipes. The Style A vented cap is primarily for diesel fuel. The Style B air-tight caps are for gasoline or jet fuel. The caps are also intended to provide some security to prevent tampering with fuel supplies; reduce fire hazards, fuel contamination, and vapor emission.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:52Z
Check the source to verify that this is the current version before use.

6.2 Ordering data.

6.2.1 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.
b. Number and type, size, style, and adapter required (see 1.2, 3.4.1, 3.4.2, and 3.4.4).
c. Type of material required for the caps (see 3.3.1, 3.3.2, and 3.3.3).
d. Type of material for the Adapter A bushing (see 3.3.4).
e. Material required for the Adapter B threaded reducer, if other than cast iron (see 3.3.4).
f. When an Adapter A bushing is required for the Type I, Size 1 cap (see 3.4.5.1).
g. When an Adapter B threaded reducer is required for the Type II, Size 1 cap (see 3.4.5.2).
h. When the Styles A and B caps are to conform to other than NFPA 30 requirements (see 3.5.1 and 3.5.2).
i. When a first article sample is required. When a preproduction pack inspection is required (see 4.2.1 and 4.7).
j. Time frame required for the preproduction pack (see 4.7).
k. Level of preservation and level of packing (see 5.1).

6.2.2 Data requirements. When this specification is used in an acquisition which incorporates a DD Form 1423, Contract Data Requirements List (CDRL) and invokes the provisions of DOD Federal Acquisition Regulations (FAR) Supplement 27.410-6, the data requirements will be developed as specified by an approved Data Item Description (DD Form 1664) incorporated into the contract. When the provisions of DOD FAR 27.410-6 are not invoked, the data shall be delivered in accordance with the contract requirements.

6.3 First article. When a first article inspection is required, the item will be tested and should be a first article sample or it may be a standard production item from the contractor's current inventory as specified in 4.2.1. The first article should consist of one unit of the type required. The contracting officer should include specific instruction in acquisition documents regarding arrangements for examination, test, and approval of the first article.

6.4 Cross-reference of classification. The following is a cross reference of classification in the sizes between this revision and the previous revision.

MIL-C-19908D	MIL-C-19908C
Size 1 (2-inch)	Size 2 (2-inch)
Size 2 (3-inch)	Size 3 (3-inch)
Size 3 (4-inch)	Size 4 (4-inch)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:52Z
Check the source to verify that this is the current version before use.

6.5 Subject term (key word) listing.

Air tight
Caps, gasoline, diesel, and jet fuel storage tank
Vented

6.6 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes involved.

Custodians:

Navy - YD
Air Force - 99

Review Activity:

DLA - CS

Preparing Activity:

Navy - YD

(Project 5430-0163)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:52Z
Check the source to verify that this is the current version before use.

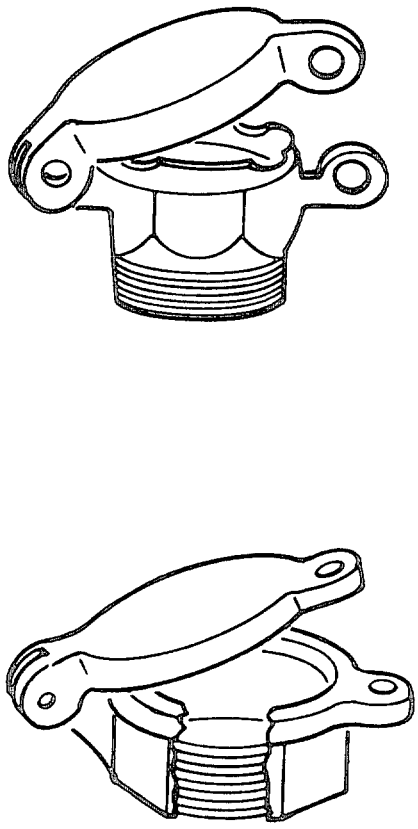


FIGURE 1. Style A, vented fill cap.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:52Z
Check the source to verify that this is the current version before use.

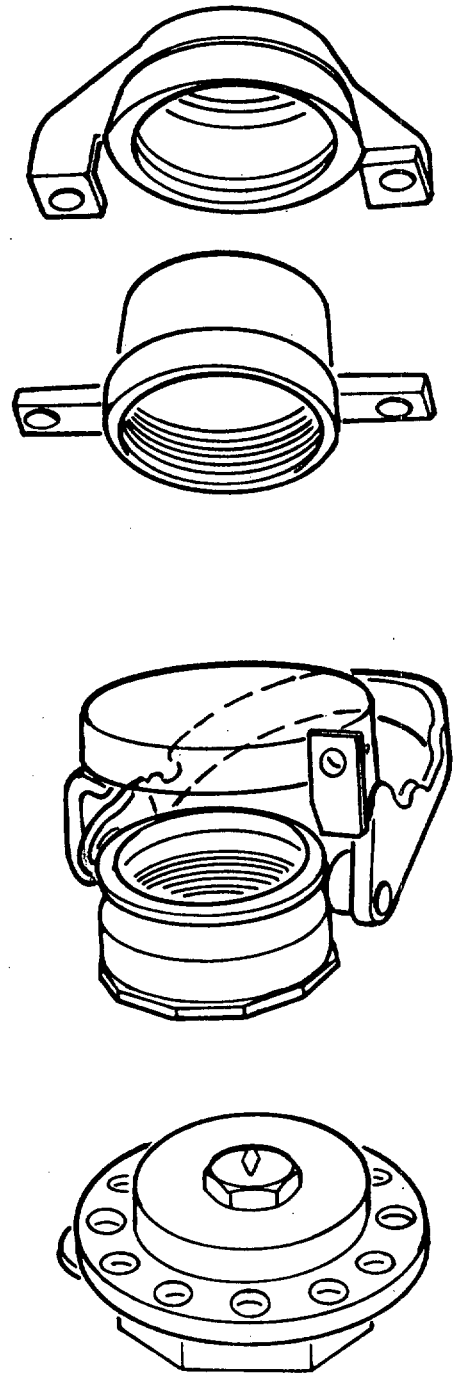


FIGURE 2. Style B, air-tight fill cap.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:52Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-19908D	CAPS, FUEL STORAGE TANK

3a. NAME OF SUBMITTING ORGANIZATION

b. ADDRESS *(Street, City, State, ZIP Code)*

4. TYPE OF ORGANIZATION *(Mark one)*

- ☐ VENDOR
- ☐ USER
- ☐ MANUFACTURER
- ☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil - Downloaded: 2026-10-19T06:52Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY
Commanding Officer (156)
Naval Construction Battalion Center
Port Hueneme, CA 93043-5000

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commanding Officer (156)
Naval Construction Battalion Center
Port Hueneme, CA 93043-5000

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:52Z
Check the source to verify that this is the current version before use.