MIL-C-19921A(SHIPS)
21 June 1961
SUPERSEDING
MIL-C-19921(SHIPS)
22 August 1957

MILITARY SPECIFICATION

CASES: EMERGENCY, FOOD PACKET; EMERGENCY, DRINKING WATER; AND EMERGENCY EQUIPMENT, INFLATABLE LIFEBOAT

1. SCOPE

1.1 Scope. - This specification covers emergency cases for carrying food, drinking water, and equipment for inflatable lifeboats.

1.2 Classification. - Cases shall be of the following types as specified (see 6.1):

Type I - Case, emergency, food packet.
Type II - Case, emergency, drinking water.
Type III - Case, emergency, equipment for inflatable lifeboats.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids, form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-F-495 - Finish, Chemical, Black, for Copper Alloys.
MIL-C-17415 - Cloth, Coated, Inflatable Boat.

FSC 4220, 8970

Source: https://assist.dla.mil -- Downloaded: 20261O-19T06:53Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. - The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids shall apply.

OFFICIAL CLASSIFICATION COMMITTEE

Uniform Freight Classification Rules.

(Application for copies should be addressed to the Official Classification Committee, 1 Park Avenue at 33rd Street, New York 16, N. Y.)

3. REQUIREMENTS

3.1 Preproduction sample. - Before production is commenced, a finished case of the proper type shall be submitted for the examination and test of 4.2.

3.2 Material. - Material shall be as specified herein and as specified in table I. Material not definitely specified shall be of the best commercial quality, of the lightest possible weight, and shall be entirely suitable for the purpose intended. Material shall be free from all defects and imperfections that might affect the serviceability of the finished product.

Source: https://assist.dla.mil -- Downloaded: 202610-19T06:53Z
Check the source to verify that this is the current version before use.

Table I - Material.

Type	Part	Material	Specification
I, II, III	Body pattern	Coated nylon	Type 5, MIL-C-17415
I, II, III	Outside bottom pattern	Coated nylon	Type 5, MIL-C-17415
I, II, III	Inside bottom pattern	Coated nylon	Type 5, MIL-C-17415
III	Grommet	Brass	----------
I, II, III	Lip pattern	Coated nylon	Type 5, MIL-C-17415
I, II, III	Reinforced disc	Neoprene gum	----------
I, II, III	Sealer disc	Coated nylon	Type 5, MIL-C-17415
I, II, III	Inside corner reinforcement	Neoprene gum	----------
I, II, III	Outside corner reinforcement	Neoprene gum	----------
III	Loop patch cover	Coated nylon	Type 5, MIL-C-17415
I, II, III	Keeper strap	Coated nylon	Type 5, MIL-C-17415
I, II	Keeper strap patch	Coated nylon	Type 5, MIL-C-17415
I, II, III	Gum strip	Neoprene	----------
III	Base pattern	Coated nylon	Type 5, MIL-C-17415
III	Loop	Coated nylon	Type 5, MIL-C-17415

3.2.1 The utilization of scrap coated cloth for the fabrication of discs, reinforcements, straps, and patches is acceptable, and such cloth shall be employed wherever practicable; however, the use of wrinkled or inferior quality scrap cloth will not be permitted for any purpose.

3.2.2 Gum strip. - Coated cloth specified in table I may be substituted for gum stripping.

3.3 Construction. - Types I, II and III emergency cases shall be constructed in accordance with figures 1, 2, and 3, respectively. Construction shall be such as to enable the cases to meet the test of 4.5.2.

Source: https://assist.dla.mil -- Downloaded: 20261O-19T06:53Z
Check the source to verify that this is the currentversion before use.

3.3.1 Laps and seams. - All laps and seams shall be secured only by use of vulcanizing cement or solvent prior to vulcanizing. The case shall be vulcanized on a form in a pressure-type autoclave after assembly. Sewing shall not be used in any seams or through the coated cloth of the case.

3.3.1.1 Cemented seams shall withstand the waterproofness test in 4.5.1.

3.3.2 The calender coat of the type III case shall be on the outside of the case.

3.3.3 Slide adjuster. - The slide adjuster shall be commercial.

3.4 Dimensions and tolerances. - Dimensions and tolerances shall be as shown on figures 1, 2, and 3.

3.4.1 Neoprene gum used for reinforcement shall be 0.032 inch thick.

3.5 Color. - The case shall be natural color of the finished cloth.

3.6 Grommet. - The grommet shall be commercial.

3.7 Each case shall withstand the test for waterproofness of seams of 4.5.1.

3.8 Marking. - The following information shall be stenciled with durable yellow paint on the outside of the case:

Contractor
Contract or order number
Month and year of manufacture

3.9 Workmanship. - Workmanship shall be first class in every respect.

Source: https://assist.dla.mil -- Downloaded: 20261O-19T06:53Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 The supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own or any other inspection facilities and services acceptable to the Government. Inspection records of the examination and tests shall be kept complete and available to the Government as specified in the contract or order. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Preproduction inspection. - Prior to production, sample cases submitted in accordance with 3.1 shall be visually and dimensionally examined and tested for leakage in accordance with 4.4 and 4.5.2 to determine conformance with this specification.

4.3 Sampling. -

4.3.1 Inspection lot. - All cases of the same type offered for delivery at one time shall be considered a lot for purposes of inspection.

4.3.2 Sampling for examination. - From each lot of finished cases, a random sample shall be selected in accordance with Standard MIL-STD-105 at inspection level II for the examination of 4.4. Any case having one or more defects shall be rejected. Lots shall be accepted or rejected in accordance with Acceptable Quality Level (AQL) 1.5 percent defective.

4.3.3 Sampling for leakage test. - From each lot of cases, a random sample shall be selected in accordance with inspection level L-8 of the appendix to Standard MIL-STD-105 for the test of 4.5.2. If any case falls the test, the lot represented shall be rejected.

4.4 Examination. - Each sample case selected in accordance with 4.3.2 shall be examined to verify conformance with all the requirements of this specification not involving tests.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:53Z
Check the source to verify that this is the current version before use.

4.5 Test procedures. -

4.5.1 Waterproofness test of seams. - The mouth of each case shall be closed in such a manner that air is captured within the case. All seams shall then be coated with soapy water and the case sufficiently pressed to force air to the seam at the point under examination. A soap solution producing firm bubbles such as a solution of potassium oleate shall be used for this test. Defects in the seam will be located by the escaping air causing the soapy water to form bubbles.

4.5.2 Leakage test. - The sample cases shall be tested for leakage as follows: The mouth of the case shall be closed as designed, and in such manner that air is captured within the case to the normal capacity. The closed case shall be immersed in water so that the highest part is under at least 12 inches of water. After not less than 1 hour, the case shall be removed and examined. There shall be no trace of water on any of the inner surfaces of the case which come in contact with any of the materials carried in the case. Care shall be taken in opening the case for inspection to assure that no water falls inside of the case from the outside.

5. PREPARATION FOR DELIVERY

5.1 Domestic shipment and early material use. -

5.1.1 Packaging. - Packaging shall be sufficient to afford adequate protection against deterioration and physical damage during shipment from the supply source to the using activity and until early use.

5.1.2 Packing. - Packing shall be accomplished in a manner which will insure acceptance by common carrier and will afford protection against physical and mechanical damage during direct shipment from the supply source to the using activity for early use. The shipping containers shall conform to the Uniform Freight Classification Rules and Regulations or other carrier regulations as applicable to the mode of transportation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:53Z
Check the source to verify that this is the current version before use.

5.1.3 Marking. - Shipment marking information shall be provided on interior packages and exterior shipping containers in accordance with the contractor's commercial practice. The information shall include nomenclature, Federal stock number or manufacturer's part number, contract or order number, type, contractor's name and destination.

5.2 Domestic shipment and storage or overseas shipment. - The requirements and levels of preservation, packaging, packing and marking for shipment shall be specified by the procuring activity (see 6.1).

(5.2.1 The following provides various levels of protection during domestic shipment and storage or overseas shipment, which may be required when procurement is made.

5.2.1.1 Preservation and packaging. -

5.2.1.1.1 Level A. - Cases shall be individually preserved and packaged in accordance with method III of Specification MIL-P-116. Contact preservative is not required.

5.2.1.2 Packing. -

5.2.1.2.1 Level A. - Cases shall be packed in containers conforming to any one of the following specifications at the option of the contractor:

Specification	Type and class
PPP-B-576	Class 2
PPP-B-585	Class 3 use
PPP-B-591	Overseas type
PPP-B-601	Overseas type
PPP-B-621	Class 2
PPP-B-636	Class 2
PPP-B-640	Class 2

Shipping containers shall be closed, strapped or banded in accordance with the applicable box specification or appendix thereto. Fiberboard boxes conforming to Specification PPP-B-636 shall have all corner and edge seams and manufacturer's joint sealed with tape in accordance with the appendix to Specification PPP-B-636. The gross weight of wood or wood-cleated boxes shall not exceed 200-pounds; fiberboard boxes shall not exceed the weight limitations of the applicable fiberboard specification.

Source: https://assist.dla.mil -- Downloaded: 20261O-19T06:53Z
Check the source to verify that this is the current version before use.

5.2.1.2.2. Level B. - Cases shall be packed in containers conforming to any one of the following specifications at the option of the contractor:

Specification	Type or class
PPP-B-576	Class 1
PPP-B-585	Class 1 or 2 use
PPP-B-591	Domestic type
PPP-B-601	Domestic type
PPP-B-621	Class 1
PPP-B-636	Class 1
PPP-B-640	Class 1

Box closure shall be as specified in the applicable box specification or appendix thereto. The gross weight of wood or wood-cleated boxes shall not exceed 200-pounds; fiberboard boxes shall not exceed the weight limitations of the applicable fiberboard box specification or appendix thereto.

5.2.1.3 Marking. - In addition to any special marking required by the contract or order, interior packages and exterior shipping containers shall be marked in accordance with Standard MIL-STD-129.)

6. NOTES


6.1 Ordering data. - Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Type required (see 1.2).
(c) Preservation, packaging, packing and marking requirements if other than those required by 5.1 (see 5.2).

Notice. - When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Preparing activity:
Navy - Ships
Project 4220-N028Sh


Source: https://assist.dla.mil -- Downloaded: 20261O-19T06:53Z
Check the source to verify that this is the current version before use.

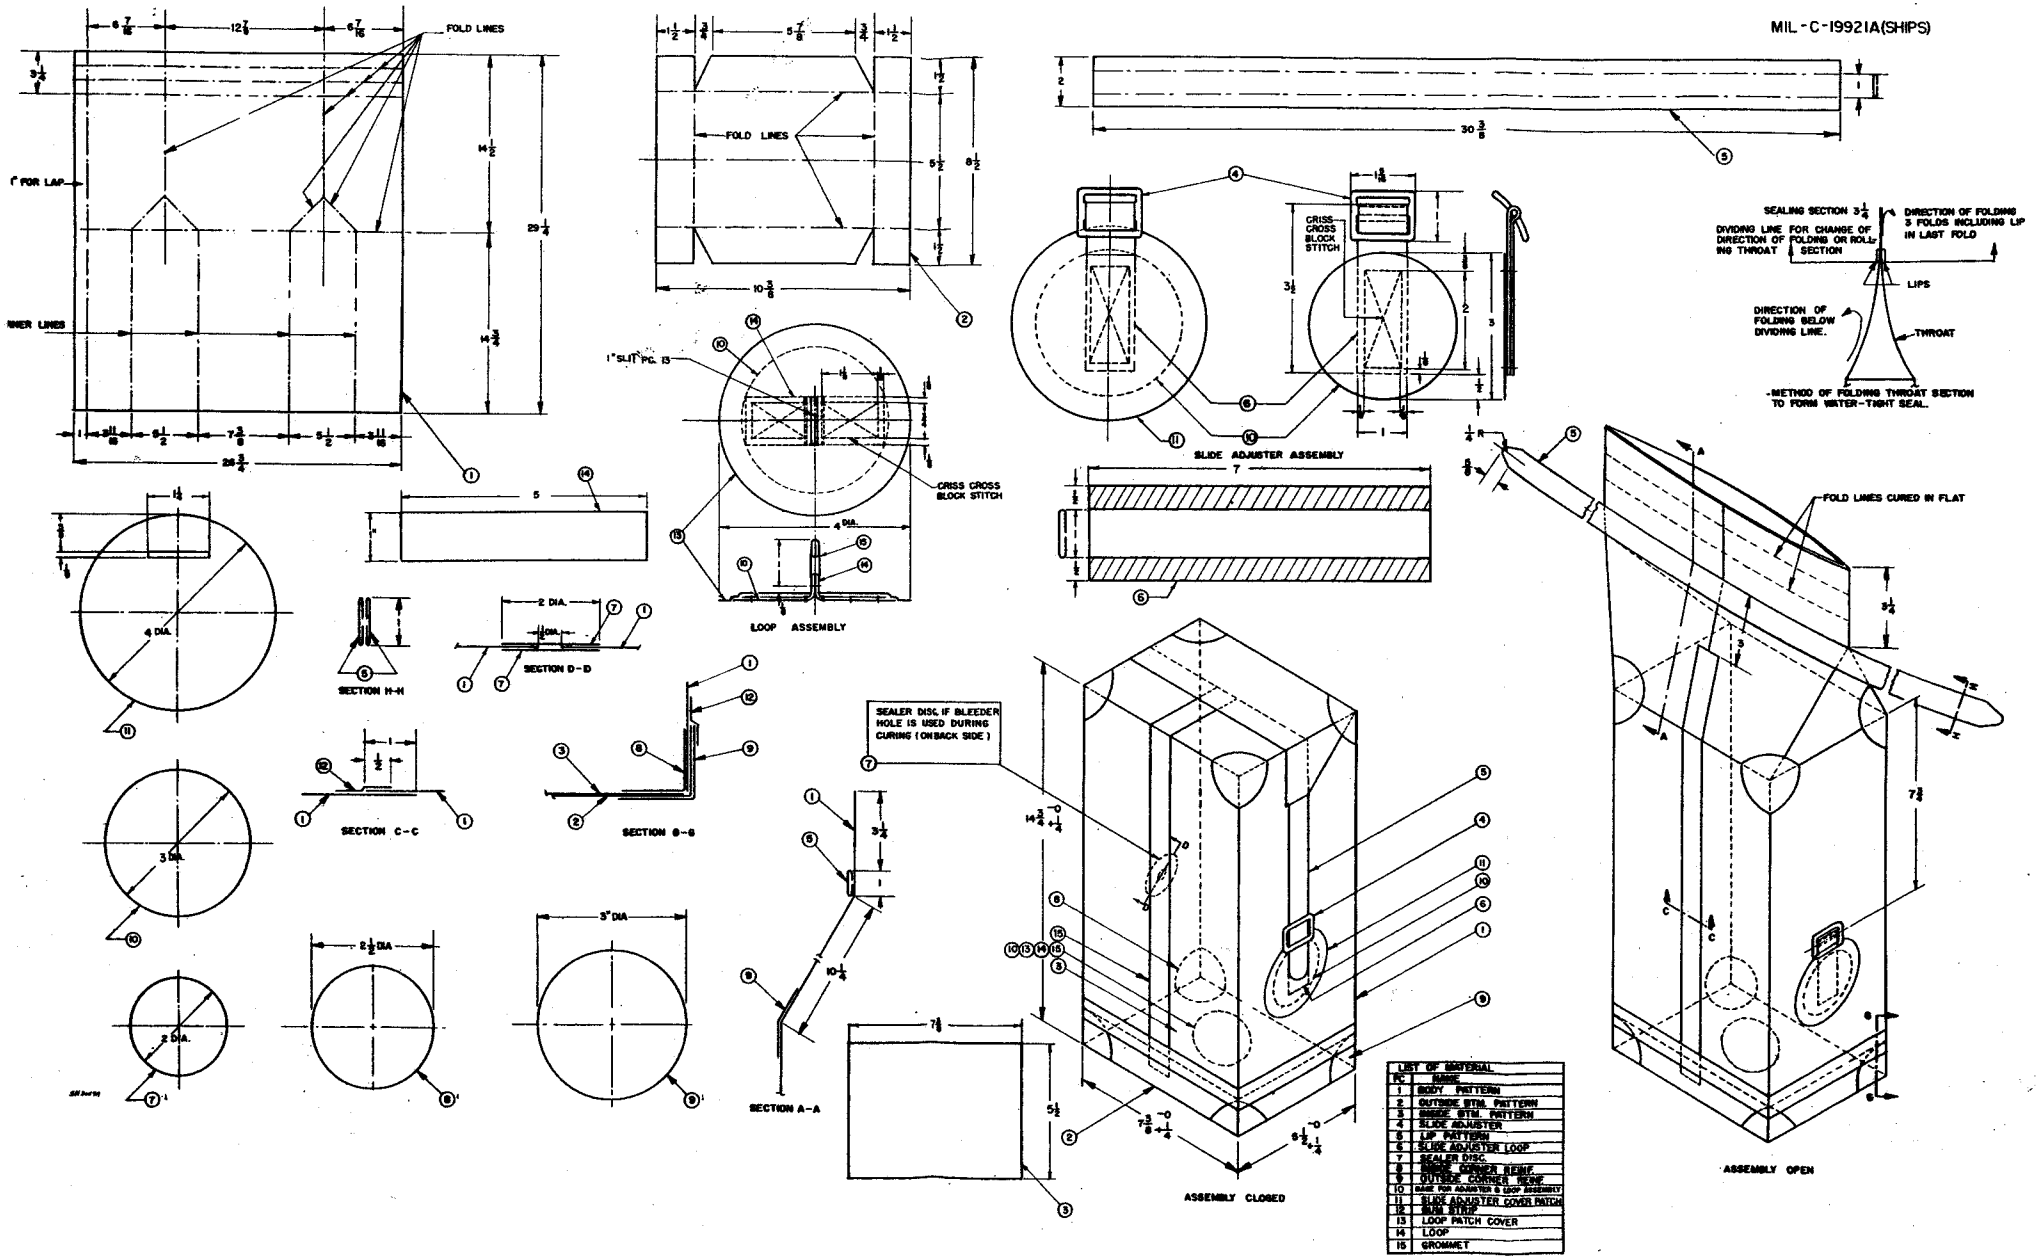

LIST OF MATERIAL	
PC	NAME
1	BODY PATTERN
2	OUTSIDE STRIP PATTERN
3	INSIDE STRIP PATTERN
4	SLIDE ADJUSTER
5	LIP PATTERN
6	SLIDE ADJUSTER LOOP
7	SEALER DISC
8	INSIDE CORNER REINF.
9	OUTSIDE CORNER REINF.
10	BASE FOR ADJUSTER & LOOP ASSEMBLY
11	SLIDE ADJUSTER COVER PATCH
12	SIDE STRIP
13	LOOP PATCH COVER
14	LOOP
15	GROMMET

Figure 1 Type I CASE, EMERGENCY, FOOD PACKET.


Source: https://assist.dla.mil -- Downloaded: 202610-19T06:53Z
Check the source to verify that this is the current version before use.

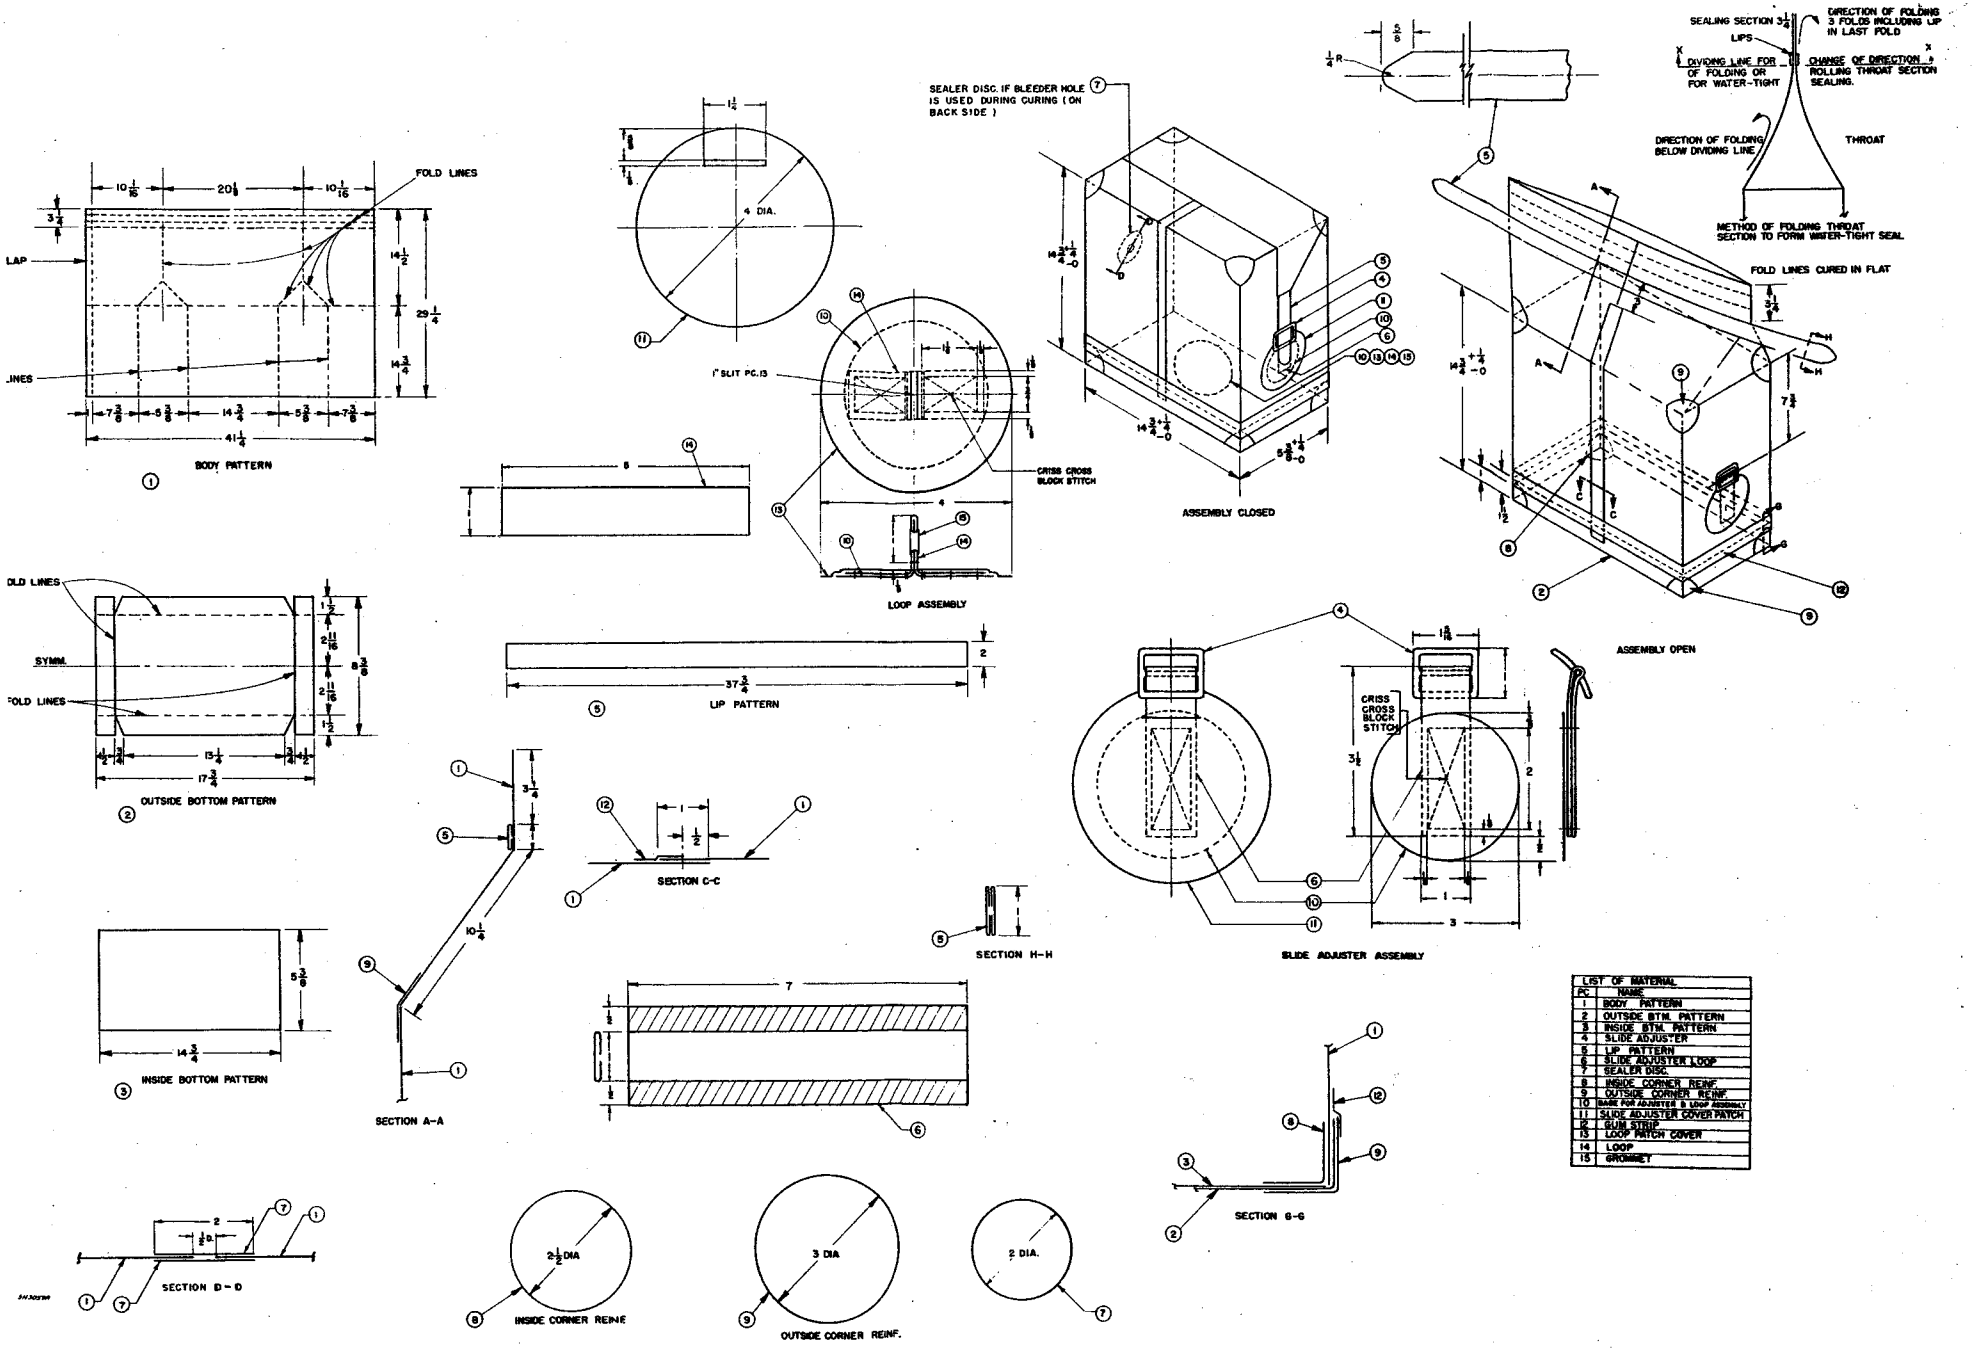

LIST OF MATERIAL	
PC	NAME
1	BODY PATTERN
2	OUTSIDE BTM. PATTERN
3	INSIDE BTM. PATTERN
4	SLIDE ADJUSTER
5	LIP PATTERN
6	SLIDE ADJUSTER LOOP
7	SEALER DISC.
8	INSIDE CORNER REINF.
9	OUTSIDE CORNER REINF.
10	BASE FOR ADJUSTER & LOOP ASSEMBLY
11	SLIDE ADJUSTER COVER PATCH
12	GUM STRIP
13	LOOP PATCH COVER
14	LOOP
15	GROMMET

Figure 2 TYPE II CASE, EMERGENCY, DRINKING WATER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:53Z
Check the source to verify that this is the current version before use.

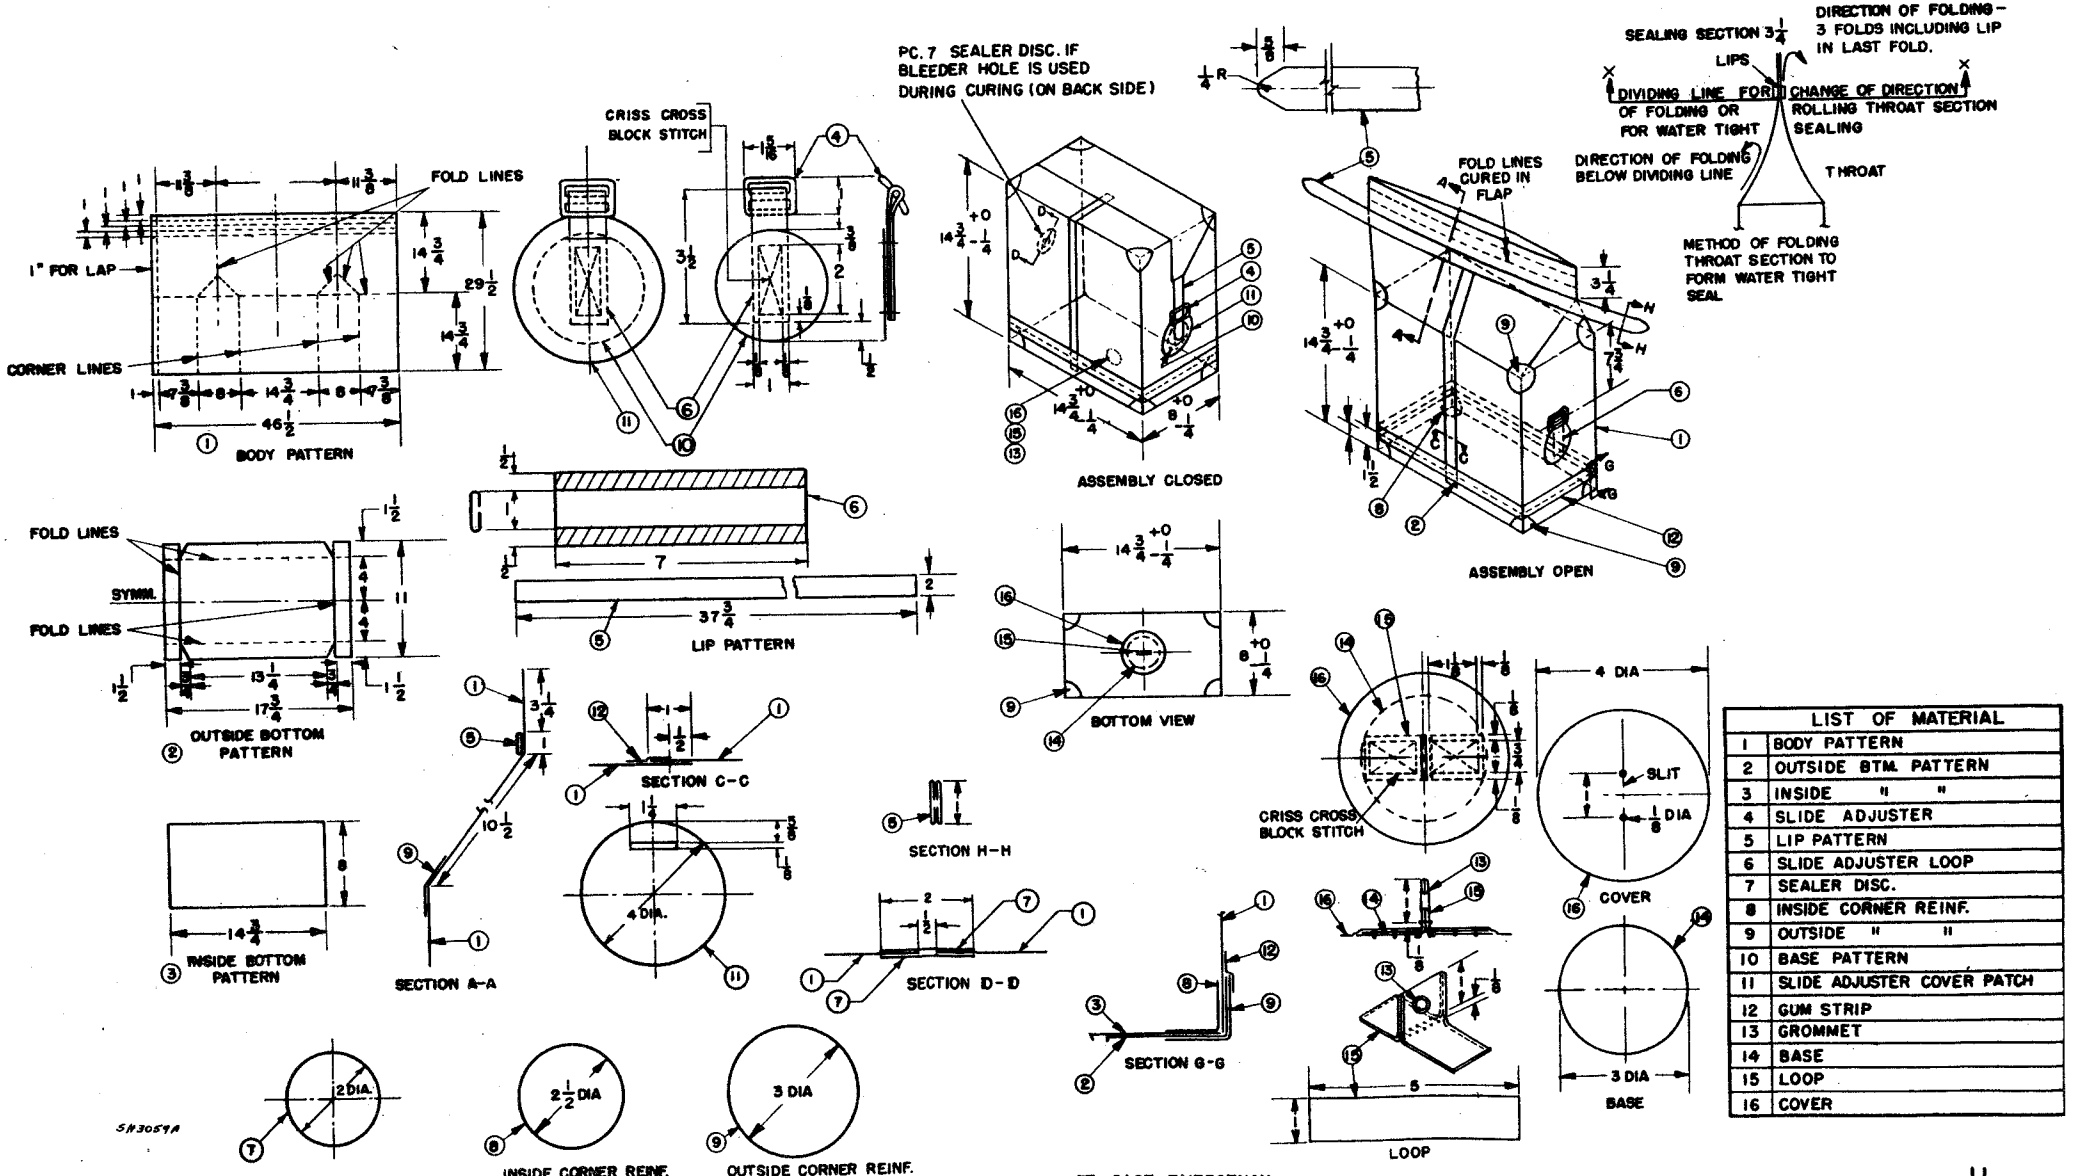

LIST OF MATERIAL	
1	BODY PATTERN
2	OUTSIDE BTM. PATTERN
3	INSIDE " "
4	SLIDE ADJUSTER
5	LIP PATTERN
6	SLIDE ADJUSTER LOOP
7	SEALER DISC.
8	INSIDE CORNER REINF.
9	OUTSIDE " "
10	BASE PATTERN
11	SLIDE ADJUSTER COVER PATCH
12	GUM STRIP
13	GROMMET
14	BASE
15	LOOP
16	COVER

Figure 3 Type III CASE, EMERGENCY, EQUIPMENT FOR INFLATABLE LIFEBOATS.

Source: https://assist.dla.mil -- Downloaded: 202610-19T06:53Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof)*.

SPECIFICATION

ORGANIZATION *(Of submitter)* | CITY AND STATE

CONTRACT NO. | QUANTITY OF ITEMS PROCURED | DOLLAR AMOUNT
$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)* | DATE

DD FORM 1 APR 63 1426 REPLACES NAVSHIPS FORM 4863, WHICH IS OBSOLETE C-8279

Source: https://assist.dla.mil -- Downloaded: 20261O-19T06:53Z
Check the source to verify that this is the current version before use.