MIL-N-19857C(MC)
31 March 1970
SUPERSEDING
MIL-N-19857B(MC)
11 March 1964

MILITARY SPECIFICATION

NECKTIES: WOMAN'S, POLYESTER/WOOL

1. SCOPE

*1.1 Scope. This specification covers the requirements for neckties made from polyester/wool material.

*1.2 Classification. Neckties shall be of one type and size in the following classes, as specified (see 6.2):

Class 1 - Blue shade 2320
Class 2 - Olive green shade 2228
Class 3 - Green shade 2229

2. APPLICABLE DOCUMENTS

*2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

R-N-91	- Napthalene, Technical
V-T-276	- Thread, Cotton.
V-T-301	- Thread, Silk.
DDD-L-20	- Label; For Clothing, Equipage, and Tentage (General Use).
PPP-B-636	- Box, Fiberboard.

MILITARY

MIL-C-21115	- Cloth, Tropical: Wool; Polyester/Wool.

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods.
FED-STD-751	- Stitch, Seam And Stitchings.

MILITARY

MIL-STD-105	- Sampling Procedures And Tables For Inspection By Attributes.
MIL-STD-129	- Marking For Shipment And Storage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:48Z
Check the source to verify that this is the current version before use.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

*2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids, or request for proposal, shall apply.

UNIFORM CLASSIFICATION COMMITTEE
Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, 202 Chicago Union Station, Chicago, Illinois 60606.)

3. REQUIREMENTS

*3.1 Samples. Samples are furnished solely for guidance and information to the supplier (see 6.3). Variation from the specification may appear in the sample, in which case the specification shall govern.

*3.2 First article. Unless otherwise specified (see 6.2) before production is commenced, a finished necktie shall be submitted, or made available, to the contracting officer or his authorized representative for approval. The approval of the first article authorizes the commencement of production but does not relieve the supplier of responsibility for compliance with all applicable provisions of the specification. The first article shall be manufactured by the supplier in the same facilities to be used for the manufacture of the production items.

*3.3 Material.

*3.3.1 Basic fabric. The basic fabric shall be cloth, polyester-wool blend, conforming to type III of MIL-C-21115. The color of the cloth shall be as specified in 1.2, except the colorfastness to laundering, crocking, and perspiration shall not apply.

*3.3.2 Neckband lining. The neckband lining shall be black, crepe back, rayon satin fabric, weighing 4.5 to 5 ounces per square yard.

*3.3.3 Thread. The thread shall be cotton, machine twist, black (unbleached), conforming to V-T-276, type IC2, mercerized finish, ticket No. 00, 3-ply, for all seaming and stitching; and silk thread conforming to V-T-301, type III, class 3, size C, 2-ply for all hand sewing. The color of the thread for hand sewing for each class of neckties shall conform to the following:

Class (see 1.2)	Color
1	Blue, Shade AB, Cable No. 66044
2	Green, Shade S-1, Cable No. 66022
3	Green, Shade H, Cable No. 66037

The dyed thread shall show fastness to wet (dry) cleaning and light equal to or better than the standard sample. When no standard sample is available, the dyed thread shall show good fastness to wet (dry) cleaning and light.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:48Z
Check the source to verify that this is the current version before use.

*3.3.4 Slide, hook and eyelet. The slide, hook and eyelet shall be steel with black oxidized finish, conforming to Figure 1. The eyelet shall be the rolled flange type with scored barrel.

*3.3.5 Label. Each necktie shall have an identification label conforming to type 1, class 1 of DDD-L-20, except the size of the characters for the supplier's name shall be a minimum 6-point (approximately 1/16 inch). The content and format shall be as follows:

Nomenclature
Contract number
Name of supplier
Stock number
Wool Products Act information

The label shall show fastness to dry cleaning and shall be made as small as possible consistent with requirements specified herein.

*3.4 Design. The necktie shall be a "ready-made" ascot type, with adjustable neckband and hook and eye fastener, as shown in Figure 1.

*3.5 Patterns. Standard patterns will be furnished to the supplier by the Government. The standard patterns shall not be altered in any way and shall be used only as a guide for cutting the supplier's working patterns. The supplier's working patterns shall be identical to the standard patterns. The standard patterns provide 1/4-inch seam allowance except as otherwise specified in Table I, and are marked or notched for the proper cutting, placement, and assembly of the component parts.

*3.5.1 List of pattern parts. The neckties shall be cut from the material specified herein in accordance with the pattern parts as follows:

Item	Pattern nomenclature	No. of cut parts
	Material-Cloth, polyester-wool, blend, tropical	
1.	Front, long end	2
2.	Back, long end	1
3.	Back, short end	1
4.	Knot piece	1
	Material-Cloth, rayon, satin (crepe back)	
5.	Neckband lining	1

*3.6 Construction

*3.6.1 Manufacturing requirement. The neckties shall be manufactured in accordance with the operations and the stitch, seam and stitching types specified in Table I.

*3.6.1.1 Operations. The supplier is not required to follow the exact sequence of operations as listed in Table I but all operations specified shall be used to manufacture the neckties.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:48Z
Check the source to verify that this is the current version before use.

*3.6.1.2 Stitches, seams, and stitchings. The stitch, seam and stitching types specified in Table I shall conform to FED-STD-751. Whenever two or more stitch or seam types are specified for the same operation, any one of them may be used. Where stitch type 401 is used, the looper (under thread) shall be on the inside of the necktie. The number of stitches per inch as specified in Table I indicates the minimum and maximum number permitted.

*3.6.1.2.1 Thread breaks and ends of seams. Ends of seams and stitching produced with 301 type stitch when not caught in other seams or stitching shall be backtacked not less than 1/4 inch. Thread breaks (all stitch types) shall be secured by stitching back of break not less than 1/2 inch. When stitch type 401 is used, ends of seams and stitching shall be caught in other seams or stitching, and skipped stitches and thread breaks may be repaired using stitch type 301.

*3.6.1.3 Shade marking. The polyester/wool parts shall be marked to insure a uniform shade throughout the necktie. Any method of shade marking may be used except:

(1) Corrosive metal devices.
(2) Sew-on shade tickets.
(3) Adhesive-type tickets which show discoloration and the adhesive mass which adheres to the material upon removal of the tickets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:48Z
Check the source to verify that this is the current version before use.

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
1.	Cutting. a. Cut the necktie in strict accordance with the patterns furnished by the Government. b. Cut the parts with the straight-of-goods (directional lines indicated on the patterns) in the warp direction of the material except the neckband lining may be cut with the directional line in either the warp or filling direction. c. Cut the polyester/wool parts of the necktie from one piece of the basic material.					
2.	Replacement of damaged parts. a. Replace, at time of cutting, all parts containing damages such as holes or serious weakening defects such as smashes, multiple floats and slubs likely to develop into holes. b. Replace any part damaged during the manufacturing process by needle chews which may be expected to develop into a hole, scissors or knife cuts, tears, holes, mends and burns.					
3.	Shade marking. a. Mark or ticket (see 3.6.1.3) all polyester/wool parts in order to insure a uniform shade and proper assembly throughout the necktie.					
4.	Make front part. Finished appearance. The front parts shall finish smooth and flat, without twists, gathers, puckers, pleats or raw edges, and the corners and seamed edges shall be uniformly worked out. a. The long front parts shall be made of two plies of basic material.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:48Z
Check the source to verify that this is the current version before use.

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
4.	Make front part. (cont'd)					
	b. Seam the two plies together 1/4 inch from each edge, leaving one side open at the neckband for turning.	301 or 401	SSa-1	12-16	00/3	00/3
			SSa-1	12-16	00/3	00/3
	c. Trim corners, turn, work out the corners and seamed edges; so that the seamline is at the edge and the underside of the front part is not exposed beyond the edge of the top ply in the finished necktie, the edges may be basted all around turning in raw edges of opening.	101 or Hand				
	d. Press the necktie smooth and flat with a heated pressing iron or pressing machine.					
5.	Make back part.					
	Finished appearance. The back parts shall finish smooth and flat, without twists, gathers, puckers, pleats or raw edges, and the corners and seamed edges shall be uniformly worked out. The neckband lining piece shall finish with the crepe side on the outside of the finished necktie.					
	a. The long end and short end for the back part of the necktie shall be made of basic material. The neckband for the short end shall be made of lining material.					
	b. Seam the neckband lining piece to the short end of back part 1/4 inch from the raw edge.	301 or 401	SSa-1	12-16	00/3	00/3
			SSa-1	12-16	00/3	00/3
	c. The identification label shall be centered and sewn to the face side of the short end of the back part, and stitched on all four sides. The stitching and label shall not be exposed on the top ply of the back part of the necktie.	301	LSbj-1	12-16	00/3	00/3
	d. Seam the long and short back and lining parts together 1/4 inch from each edge, leaving one side open at the neckband for turning.	301 or 401	SSa-1	12-16	00/3	00/3
			SSa-1	12-16	00/3	00/3

Source: https://assist.dla.mil Downloaded: 2026-10-19T06:48Z
Check the source to verify that this is the current version before use.

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
5.	Make back part. (cont'd)					
	e. Trim corners, turn, work out the corners and seamed edges; so that the seam line is at the edge and the underside is not exposed beyond the edge of the top ply; the edges may be basted all around turning in raw edges of opening.	101 or Hand				
	f. Press the necktie smooth and flat with a heated pressing machine or pressing iron.					
	g. Close the opening at the side edges of the neckband for the front and back parts of necktie.	Hand		8-10	C (silk)	
6.	Attach eyelet to neckband.					
	Finished appearance. The eyelet shall be properly positioned and attached through the neckband of the front part of the necktie and securely clinched on the inside without distorting and cutting the material or splitting the flange of the eyelet.					
	a. Attach the metal eyelet through the neckband of the front part of the necktie. The eyelet shall be centered on the neckband with the center of the eyelet 1/4 to 5/16 inch from the end and with the flange of the eyelet on the topside of the neckband (see Figure 1).					
7.	Attach slide and hook to necktie.					
	a. Thread the back end of the back part of the necktie through the slide and hook, and back around the center bar of the slide, as shown in Figure 1.					
	b. Tack the back end of the back part to the neckband lining with not less than 6 felling stitches across the end and 3 to 4 stitches at both edges of the necktie (see Figure 1).	Hand			C (silk)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:48Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
8.	Assemble necktie. Finished appearance. The front and back parts of the necktie when assembled shall conform to Figure 1.					
	a. Place the front and back parts together with the bottom edges even with each other, and with the front part offset 7/8 ± 1/8 inch to the left (as worn) of the back part at the lower edge and 1/2 ± 1/16 inch at the location of the knot piece, as shown in Figure 1. Form a center pleat in the front part at the location of the knot so that the left edge of the front and back parts are even and secure the pleat with hand stitches; wrap a double strand of the thread around the necktie with not less than 3 turns drawing up the width of the necktie to fit the dimension at the lower edge of the knot shown in Figure 1 and securely tack the ends of the threads.	Hand				C (silk)
9.	Make knot piece. Finished appearance. The knot piece when assembled shall conform to Figure 1.					
	a. Fold the knot piece at the notches indicated on the pattern with the wider folded edge lapped over the narrow folded edge. Stitch through all plies 1/8 inch from the raw edge of the overlapped edge.	301	EFy-1	8-10	00/3	00/3
	b. Fold the wider folded edge approximately 3/8 inch from the row of stitching and lap to 1/8 inch from the folded edge on the opposite side of the row of stitching forming a pleat in the knot piece to conceal the lapped edges and row of stitching and form a welt as shown in Figure 1. Stitch each end 1/8 inch from the raw edge through all plies.	301	SSa-1	8-10	00/3	00/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:48Z
Check the source to verify that this is the current version before use.

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
9.	**Make knot piece.** (cont'd)					
	c. Wrap the knot piece around the necktie positioned as shown in Figure 1. Finished dimensions shall be as shown in Figure 1. Fold under the overlapping end at center of knot on the back and hand tack the end and upper and lower edges of the knot on the back to the necktie, securing the knot in position. Excess material at ends of knot may be trimmed off.	Hand		8-10	C	
10.	**Clean and press necktie.**					
	a. Trim thread ends, remove bastings, (if basting operation is used), loose threads, spots, stains and shade tickets.					
	b. Press necktie.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:48Z
Check the source to verify that this is the current version before use.

*3.7 Finished dimensions. The finished dimensions of the necktie shall be as shown on Figure 1.

*3.8 Workmanship. The necktie shall be clean, well made and finished; the center pleat and knot piece shall be neatly made and well formed; the folded edges of the knot piece and all edges of the front and back parts shall be uniformly even and sharp, with the corners well turned and worked out and with no seams visible on the front of the necktie; and the necktie shall be free from wrinkles, creases, puckers, and all other defects which may affect appearance or serviceability.

4. QUALITY ASSURANCE PROVISIONS

*4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

*4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

*4.2 Inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated herein.

*4.2.1 First article inspection. When first article is required, inspection and testing shall be performed on a completely fabricated necktie for conformance to all provisions of this specification.

*4.2.2 Component and material inspection. In accordance with 4.1 above, components and material shall be tested in accordance with all the requirements of referenced specifications, drawings and standards, unless otherwise excluded, amended, modified,or qualified in this specification or applicable procurement document. In addition, testing shall be performed on components listed in Table II for characteristics noted. The method of testing specified in FED-STD-191, wherever applicable and as listed in Table II shall be followed. All requirements are applicable to the sample unit. When the "Number of determinations per sample unit" and the "Results reported as" are not specified in Table II, they shall be as required by the referenced test method. Unless otherwise specified in subsidiary specifications, sampling shall be in accordance with the following:

Lot Size	Sample Size
800 or less	2
801 to 22,000 inclusive	3
22,001 and over	5

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:48Z
Check the source to verify that this is the current version before use.

The lot shall be unacceptable if one or more sample units fail to meet any test requirement specified herein. All test reports shall contain the individual values utilized in expressing the final result. The unit for expressing lot size, and the sample unit for testing each component shall be in accordance with the applicable subsidiary specifications and as follows:

Component	Lot size expressed as	Sample unit for testing
Cloth, Rayon Satin Crepe back	yard	1/4 yd full width
Slide, hook and eyelets	gross	15 each

Table II - Test methods

Component	Characteristic	Requirement paragraph	Test method	Det per sample unit	Results reported as:
Cloth, rayon satin, Crepe back	Material identification	3.3.2	1500		
	Weight	3.3.2	5041		
Slide, Hook & Eyelets	Material identification 1/	3.3.4	Std. Comm'l		
	Finish	3.3.4	Std. Comm'l.		
	Color	3.3.4	Visual		
	Type	3.3.4	Visual		
	Dimensions	Figure 1	Visual		

1/ Accept on supplier's certificate of compliance of this characteristic

*4.2.3 Examination of the end item. The classification of defects found during examination shall be in accordance with list shown in 4.2.3.1 and 4.2.3.2. The applicable inspection levels and acceptable quality levels (AQL's) shall be as indicated in 4.2.3.3. The sample unit for these examinations shall be one necktie.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:48Z
Check the source to verify that this is the current version before use.

*4.2.3.1 General defects. General defects shall be classified as follows:

Examine	Defect	Classification Major	Minor A	Minor B
Cleanness	a. Spot or stain clearly noticeable:			
	- on front part of necktie.	X		
	- on underside of necktie.			X
	b. Shade stamping exposed or visible on outside of necktie.	X		
	c. Two or more shade tickets not removed.			X
	d. Thread ends not trimmed or loose thread ends not removed (to be scored only when the condition exists on major portion of necktie).			X
Components and assembly	Any component part or required operation omitted (unless otherwise classified herein).	X		
Cutting	Not cut in accordance with the warp directional lines on patterns or not in accordance with specified requirements.	X		
Label	a. Missing, incorrect or illegible.		X	
	b. Not stitched on one or more sides.			X
	c. Stitching through printing on label.			X
	d. Not positioned on outside of under ply of back part or stitching exposed on top side of back part.	X		
	e. Not centered by more than 1 inch.			X
Material defects and damages	a. Any hole.	X		
	b. Any weakening defect, such as a smash, multiple float, or loose slub.	X		
	c. Shade bar or unsightly slub.	X		
	d. Any tear, mend, burn or needle chew.	X		

Note: Material defects and workmanship damages are to be classified as indicated above only when the condition is one which definitely weakens the fabric or when it is so conspicuously located that it is clearly noticeable. Nonweakening conditions which are inconspicuous shall not be classified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:48Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor A	Minor B
Pressing	a. Burned or scorched.	X		
	b. Not pressed or poorly pressed.		X	
Seams and stitching	a. General.			
	1. Seams twisted, puckered or pleated.		X	
	2. Ends of any stitching (when not caught in other seams or stitchings) backtacked less than 1/4 inch.			X
	3. Thread break secured by stitching back of the break less than 1/2 inch.		X	
	4. Any part of necktie caught in an unrelated operation or stitching.	X		
	5. Not specified color or varying shades of thread exposed on outside of necktie.		X	
	b. Open seams:			
	- 1/8 inch or less.			X
	- more than 1/8 inch up to and including 1/4 inch.		X	
	- more than 1/4 inch.	X		
	c. Run-offs (use classification of open seam).			
	d. Raw edges:			
	- 1/4 inch or less.			X
	- more than 1/4 inch but not more than 1/2 inch.		X	
	- more than 1/2 inch.	X		
	e. Seam and stitch type:			
	Not specified seam or stitch type.		X	
	f. Stitch tension:			
	1. Loose tension resulting in a loose seam.	X		
	2. Tight tension (stitches break when normal strain applied to seam or stitching).	X		

Note: Puckering is evidence of tight tension. When puckering is evident, the seam shall be tested by exerting pull in the lengthwise direction of the seam or stitching.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:48Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor A	Minor B
	g. Stitches per inch (to be scored only when the condition exists on a major portion of the seam).			
	1. Less than minimum or more than maximum specified:			
	- one or two stitches.			X
	- three stitches.		X	
	- four or more stitches.	X		
Shaded parts	Any part badly shaded.	X		

*4.2.3.2 Defects applicable to specific parts. Defects applicable to specific parts shall be classified as follows:

Examine	Defect	Classification Major	Minor A	Minor B
Front and back part	a. Uneven in length at bottom:			
	- more than 1/8 inch but not more than 1/4 inch.			X
	- more than 1/4 inch but not more than 3/8 inch.		X	
	b. Front part not offset to the left as worn.	X		
	c. Front part offset at bottom edge:			
	- more than 1 inch but not more than 1-1/4 inches or less than 3/4 inch but not less than 5/8 inch.			X
	- more than 1-1/4 inches or less than 5/8 inch.		X	
	d. Front part offset at lower edge of knot:			
	- less than 7/16 inch but not less than 3/8 inch or more than 9/16 inch but not more than 5/8 inch.			X
	- less than 3/8 inch or more than 5/8 inch.		X	
	e. Bottom width (measured from edge to edge):			
	- more than 5-5/8 inches but not more than 5-3/4 inches or less than 5-3/8 inches but not less than 5-1/4 inches.			X
	- more than 5-3/4 or less than 5-1/4 inches.		X	
	f. Length (measured from bottom of knot):			
	- more than 6-1/4 inches but not more than 6-3/8 inches or less than 6 inches but not less than 5-7/8 inches.			X
	- more than 6-3/8 inches or less than 5-7/8 inches.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:48Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor A	Minor B
	g. Side or bottom edge not forced out so that seam line is at edge for a distance of more than 1 inch or underside of front or back part exposed from the top side more than 1/16 inch or for a distance of more than 1 inch.			X
Knot	a. Ends not lapping each other at back.		X	
	b. Not securely hand tacked to necktie.		X	
	c. Poorly shaped.		X	
	d. Width at top end less than 15/16 inch or more than 1-1/16 inches.			X
	e. Width at bottom end less than 11/16 inch or more than 13/16 inch.			X
	f. Height of knot (measured below welt at top to bottom edge of knot) less than 13/16 inch or more than 15/16 inch.			X
	g. Welt at top edge of knot less than 1/16 inch or more than 3/16 inch.			X
Neckband ends of necktie	a. Long end measured from top edge of welt at top of knot to end of neckband): - more than 8-5/8 inches but not more than 8-3/4 inches or less than 8-3/8 inches but not less than 8-1/4 inches.			X
	- more than 8-3/4 or less than 8-1/4 inches.		X	
	b. Short end (measured from top edge of welt at top of knot to folded end of neckband): - more than 7-1/8 inches but not more than 7-1/4 inches or less than 6-7/8 inches but not less than 6-3/4 inches.			X
	- less than 6-3/4 inches or more than 7-1/4 inches.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:48Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor A	Minor B
	c. Width less than 11/16 inch or more than 13/16 inch.			X
	d. Long end not lapped on short end at top and bottom edges of knot.		X	
	e. Neckband lining not on underside of short end or crepe side of neckband lining not on the outside.		X	
	f. Eyelet and slide hook reversed, i.e., eyelet on short end and slide hook on long end.	X		
Eyelet	a. Omitted, broken, bent or otherwise defective.	X		
	b. Flange finishing on underside of back end of long end or eyelet not on the long end.			X
	c. Off center of back end of long end by 1/8 inch or more.		X	
	d. Center of eyelet located less than 3/16 inch or more than 3/8 inch from back end of long end.			X
	e. Improperly clinched.		X	
	f. Not specified type, size, color or finish.		X	
Slide hook	a. Omitted, broken, bent or otherwise defective.	X		
	b. Not specified type, size, color or finish.			X
	c. Not securely hand tacked to neckband.			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:48Z
Check the source to verify that this is the current version before use.

*4.2.3.3 Acceptable quality levels and inspection levels. The AQL expressed in defects per 100 units, and inspection levels shall be as follows:

For 4.2.3.1 and 4.2.3.2

	AQLs	Inspection level
Major	1.0	II
Major & Minor A	4.0	II
Totals (Major, Minor A & Minor B)	6.5	II

*4.2.4 Examination of preparation for delivery requirements. An examination shall be made to determine compliance with packaging, packing and marking requirements of Section 5 of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 4.0 defects per hundred units.

Examine	Defect
Marking (exterior & interior)	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Materials	Any component missing. Any component damaged, affecting serviceability.
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, loose strapping, inadequate stapling. Bulging or distortion of containers.
Content	Number of intermediate packages is more or less than required. Number of neckties per intermediate package is more or less than required. For this defect, five intermediate packages from each container in the sample shall be examined.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

*5.1.1 Level A. Fifty (50) neckties of one color only shall be packaged in a full telescope-type paperboard box measuring 15-1/2 inches in length, 11-3/4 inches in width, and 2-3/4 inches in depth, maximum outside dimensions.

5.1.2 Level C. Neckties shall be packaged in accordance with the industry's practice.

5.2 Packing. Packing shall be level B or C as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:48Z
Check the source to verify that this is the current version before use.

*5.2.1 Level B. Three hundred (300) neckties of one color only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to type CF, domestic, V3c, style RSC of PPP-B-636, assembled, closed and reinforced as specified in the appendix thereto. Inside dimensions of the shipping container shall approximate 23-1/2 inches in length, 15-1/2 inches in width, and 9 inches in depth. Not less than 8 ounces of napthalene flakes conforming to class B of R-N-91 (see 6.4) shall be uniformly distributed throughout the contents of each shipping container.

5.2.2 Level C. Neckties, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with Uniform Freight Classification Rules or regulations of other carriers applicable to the mode of transportation.

*5.3 Marking. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

*6.1 Intended use. The neckties covered by this specification are intended for wear by enlisted and officer female personnel of the U. S. Marine Corps.

*6.2 Ordering data. Purchasers should exercise any desired options offered herein, and procurement documents should specify the following:

*6.2.1 Procurement requirements.

(a) Title, number and date of this specification.
(b) Class required (1.2).
(c) Whether first article is required (3.2).
(d) Selection of applicable levels of packaging and packing (5.1 and 5.2).

*6.2.2 Contract data requirements. Data conforming to Data Item Descriptions R-01, R-02, R-04, T-01, T-02, T-03 and T-04 will usually be required for delivery in connection with this specification. When so required, such data will be specified for delivery on a DD Form 1423 included in the contract.

6.3 Samples and shade samples. For information regarding the availability of samples of the neckties and standard shades specified, address inquiry to procuring activity issuing the Invitation for Bids.

6.4 Moth repellent. The moth repellent requirement (see 5.2.1) is not applicable when neckties are made of moth repellent cloth.

6.5 Figures. Figures are furnished for information purposes only. To the extent of any inconsistencies between the written specification and the figure, the written specification shall control.

*6.6 First article. Examinations, test and approval shall be as specified by the contracting officer (see 3.2).

*6.7 Marginal notations. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship of the last previous issue.

Preparing activity:
Navy - MC
Project No. 8445-NO35

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:48Z
Check the source to verify that this is the current version before use.

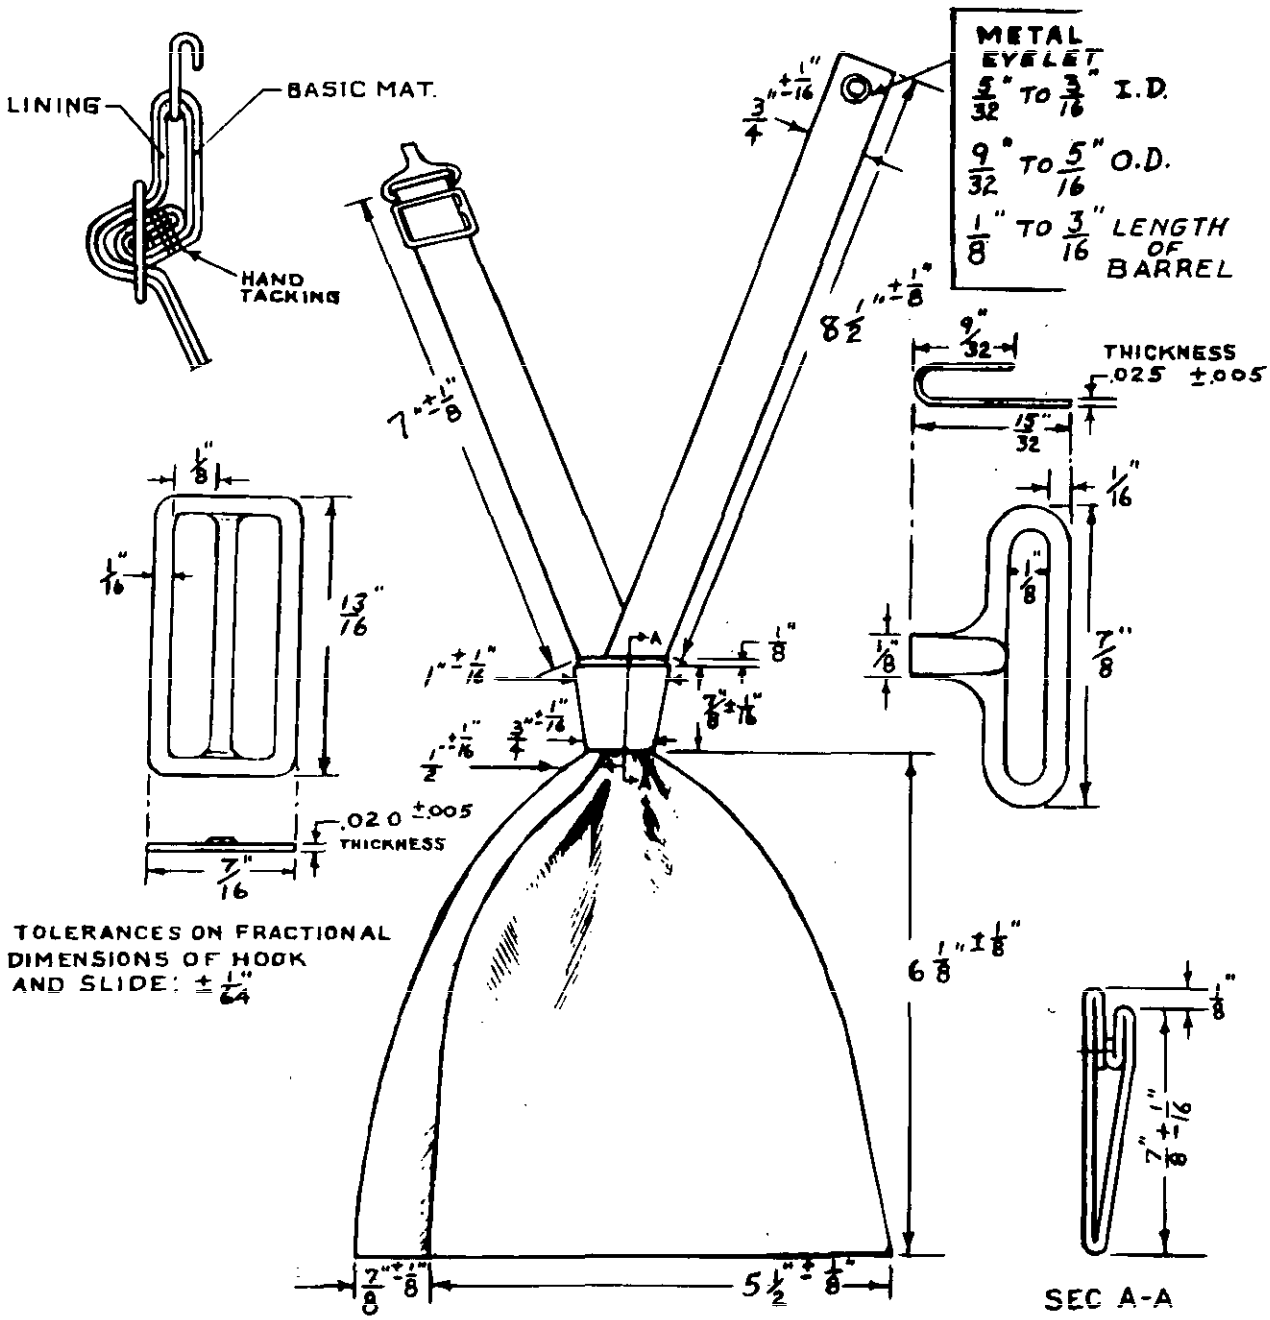


FIGURE 1. NECKTIES: WOMAN'S: POLYESTER FIBER-WOOL

M.C.S.A.
826:R.G.E
31 MAR '70

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:48Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-N-19857C(MC) NECKTIES: WOMAN'S, POLYESTER/WOOL

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED S/N 0102-LF-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:48Z
Check the source to verify that this is the current version before use.