[INCH-POUND]
A-A-1870
July 18, 1996
SUPERCEDES
ZZ-S-666D
April 18, 1991

# COMMERCIAL ITEM DESCRIPTION

## SQUEEGEES, FLOOR AND WINDOW

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

## 1. SCOPE

1.1 Scope. This description covers floor and window squeegees without handles.

## 2. CLASSIFICATION

2.1 Classification. Squeegees shall be of the following types, classes, and sizes.

Type I - Floor squeegees, wood or plastic block.
  Class 1 - Heavy duty.
    Size 12 - 12 inch (30.5 cm).
  Class 2 - Light duty.
    Size 18 - 18 inch (45.7 cm).
    Size 24 - 24 inch (61.0 cm).

Type II - Window squeegees, metal frame.
  Class 3 - Single blade, one piece frame.
    Size 8 - 8 inches (20.3 cm).
    Size 10 - 10 inches (25.4 cm).
    Size 12 - 12 inches (30.5 cm).
    Size 16 - 16 inches (40.6 cm).
    Size 24 - 24 inches (61.0 cm).
  Class 4 - Double blade, two piece brass frame.
    Size 10 - 10 inches (25.4 cm).
    Size 12 - 12 inches (30.5 cm).
    Size 16 - 16 inches (40.6 cm).

## 3. REQUIREMENTS

3.1 Materials.

3.1.1 Screws, bolts, and nuts. Screws, bolts, and nuts shall be made of corrosion resistant materials or shall be made of steel which is plated to resist corrosion.

3.1.2 Blocks. The blocks for the type I squeegees shall be closed grained and straight grained hardwood, laminated wood, compressed molded wood particles, solid plastic, or foam plastic. The finished blocks shall be free from imperfections that affect appearance, or may affect serviceability or durability. The bottom edge of the block shall be grooved to accept the blade, and all corners shall be rounded. A hole to permit the tapered end of a handle conforming to type II, size 2 or size 3 of NN-H-104 shall be made in each block. The wood blocks shall be water resistant treated by coating with clear wood sealer after machining and before assembly with blade. The blocks shall be dry to the touch before assembly with blade.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: General Services Administration, Engineering Group (7FXEB), 819 Taylor Street, Fort Worth, TX 76102

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

FSC 7920

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:17Z
Check the source to verify that this is the current version before use.

3.1.3 Frames and channels. The metal channels and metal strips of the type II squeegees shall be made of brass and shall conform to the dimensional requirements of the applicable figures. At the option of the contractor, the long leg of the type II, class 3 channel may be curved as shown by the alternate side view of figure 3; the long leg shall measure not less than 5/8 inch (15.9 mm) in overall length with the shorter leg not less than 5/16 inch (7.9 mm) in overall length.

3.1.4 Rubber blade material. The rubber blades shall be made of natural or synthetic rubber containing no coloring agent which will stain, bleed, or run. The working (exposed) edge shall be straight, free from dirt inclusions, cutter marks, or serrations. The blade material shall withstand immersion in 170±5°F (77±3°C) water for 15 minutes without any evidence of bleeding of the color or deterioration of the material. The blade shall not show deterioration or evidence of cracking when, after being exposed to the accelerated aging test of ASTM D 573 at 160±2°F (71±1°C) for 94 hours, and it is bent around a rod 1/2 inch (12.7 mm) in diameter to an angle of 90°, both directions, for 25 cycles.

3.1.5 Handle sockets. Handle sockets for the type II squeegees shall be made of brass and shall conform to the dimensions specified by the applicable figure. The socket handle shall be tapered to accept the tapered end of a handle conforming to type II, size 2 or size 3 of NN-H-104.

3.2 Construction. The squeegees shall meet the requirements of the following paragraphs and associated figures. The specified size shall be the length of the blade itself.

3.2.1 Type I. The floor squeegee shall be as specified by figure 1 or 2 as applicable, and shall be a wood or plastic block (see 3.1.2) with a groove along one edge and a rubber blade (see 3.1.4) secured in the groove by screws (see 3.1.1). The blocks shall be equipped with a tapered hole for insertion of a wood handle (see 3.1.2). A complete unit, except where the blade only is specified, shall consist of the assembled block and blade. The dimensions of the squeegees shall be as specified by the applicable figures.

3.2.1.1 Type I, Class 1. The heavy duty floor squeegees shall conform to the dimensions in figure 1. The blade shall be 3/8 ±1/8 inch (9.5 ±3.1 mm) minimum thick and shall be held securely in the grooved portion of the block by not less than four equally spaced flathead wood screws. The screws shall be 1-1/4 ±1/16 inch (3.2 ±0.2 cm) in length, countersunk even or deeper than the block surface, the screw points shall not project from the opposite face.

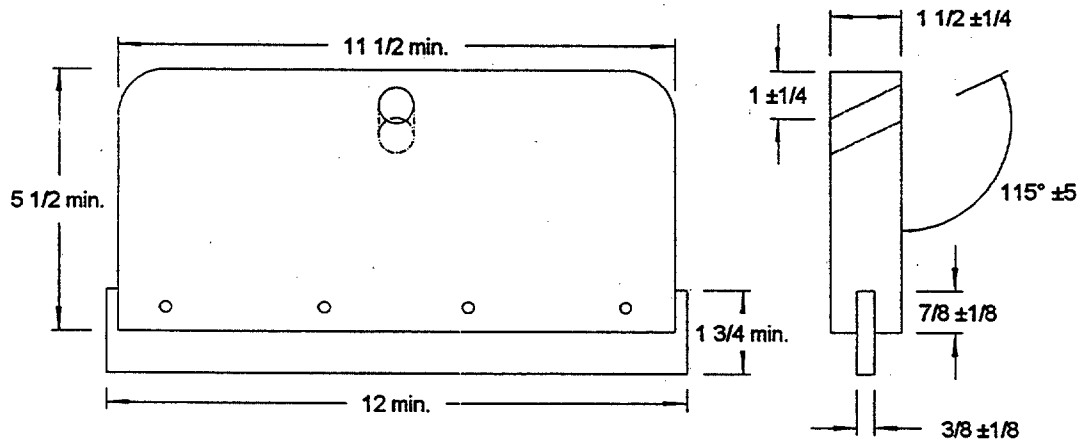



Figure 1
Type I, Class 1
(All dimensions are in inches.)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:17Z
Check the source to verify that this is the current version before use.

3.2.1.2 Type I, Class 2. The light duty squeegees shall conform to the dimensions in figure 2. The blade shall be held securely in the grooved portion of the block by equally spaced flathead wood screws, 5 for the size 18, 7 for the size 24. The screws shall be 3/4 ±1/16 inch (1.9 ±0.2 cm) in length, countersunk even or deeper than the block surface. The screw points shall not project from the opposite face.

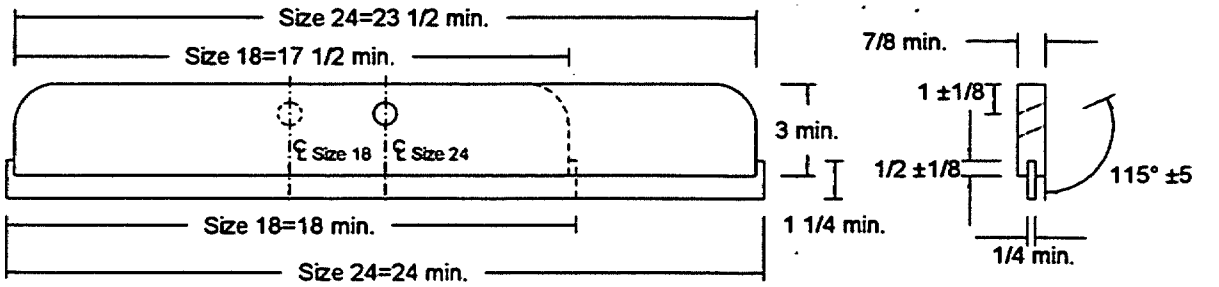



Figure 2
Type I, Class 2
(All dimensions are in inches.)

3.2.2 Type II. The metal frame squeegees shall be as specified by figures 3 or 4 as applicable. The metal frame squeegee shall be equipped with a socket tapered for insertion of a wooden handle (see 3.1.5). A complete unit, except where the blade only is specified, shall consist of the metal frame, socket, and blade. The blades of the type II squeegees shall extend beyond the ends of the metal strips no less than 1/8 inch (3.2 mm) at each end. The dimensions of the squeegees shall be as specified by the applicable figures.

3.2.2.1 Type II, Class 3. The class 3 window squeegee shall conform to figure 3, and shall be composed of a one-piece metal channel frame, a handle, and a blade. The blade shall be the rubber specified and shall have a rounded bead along one edge that inserts into the frame channel and has a diameter of 13/64 inch minimum. The blade shall be 3/32 inch (2.4 mm) thick minimum at the working edge and be the length specified by the size. The construction of the frame shall allow the removal and replacement of the blade with the use of simple tools. Deformation of the channel shall not be used as a means of retention of the blade. The handle socket shall be securely attached to the channel in such a way as there is no movement.

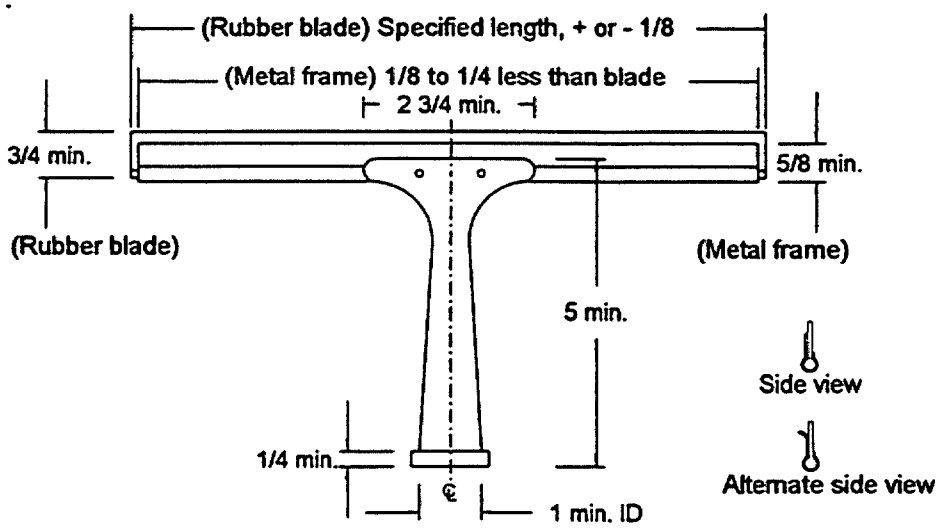



Figure 3
Type II, Class 3
(All dimensions are in inches.)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:17Z
Check the source to verify that this is the current version before use.

3.2.2.2 Type II, Class 4. The double blade, two-piece frame window squeegees shall conform to figure 4 and have a 2-ply rubber blade secured in between the two pieces of the metal strip frame by not less than 6 equally spaced screws or bolts of not less than 1/8 inch (3.2 mm) diameter. Each of the blades shall be 5/64 inch (2.0 mm) thick minimum and of the minimum length specified by the size, the metal strips shall each be 17 gauge (0.0453 inch, 1.15 mm) minimum. The bolts or screws shall extend through the first strip, both rubber blades, and the other metal strip, and shall not protrude more than 1/8 inch (3.2 mm) beyond the nuts used or the metal strip if no nuts are used. The handle socket shall be securely attached to the metal strips.

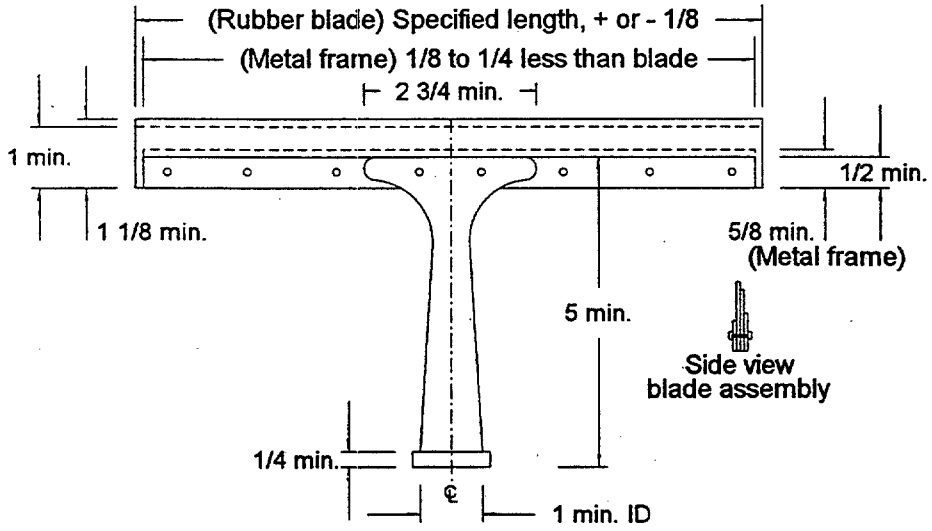



Figure 4
Type II, Class 4
(All dimensions are in inches)

3.3 Performance requirements. For all squeegees, there shall be no visible evidence of surface water when tested by wiping 5 times over a wet piece of flat glass.

3.4 Workmanship. The finished squeegees shall be straight, clean, well made, and free from any defects which may affect appearance or serviceability.

3.5 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, providing they fall within tolerances specified and all other requirements of this document are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable.

3.6 Commercial item. The use of the term "commercial item" in this document does not imply that any item or items offered are not required to conform with all requirements specified herein.

4. REGULATORY REQUIREMENTS

4.1 Regulatory requirements. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:17Z
Check the source to verify that this is the current version before use.

## 5. QUALITY ASSURANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this CID, shall conform to the producer's own drawings, specifications, standards, and quality assurance practices, and shall be the same product offered for sale in the commercial market. The government reserves the right to require proof of such conformance.

## 6. PREPARATION FOR DELIVERY

6.1 Packaging, packing, and marking. The packaging, packing, and marking shall be as specified in the contract or purchase order.

## 7. NOTES

7.1 Intended use. The squeegees covered by this specification are used for wiping floors and windows dry.

7.2 Ordering data. Purchases should select the preferred options permitted herein and include the following information in procurement documents:

a. Title, number, and date of this CID.
b. Type, class and size.
c. The packaging, packing and marking desired

7.3 Part number identification. The following numbering procedure is for government use only and does not constitute a requirement for the contractor.

Example: AA1870- A 1 / 12 (A replacement blade will end with an "R")

- 12 = Size in inches.
- 1 = Class 1, 2 = Class 2, 3 = Class 3, 4 = Class 4
- A = Type I, B = Type II
- CID A-A-1870

7.4 National stock numbers. The following NSN's have been identified as using this document:

| NSN | Type | Class | Size | Part Number |
|---|---|---|---|---|
| 7920-00-224-8339 | I | 1 | 12 | A1/12 |
| 7920-00-965-4873 | I | 2 | 18 | A2/18 |
| 7920-00-530-5740 | I | 2 | 24 | A2/24 |
| 7920-00-577-4747 | II | 3 | 10 | B3/10 |
| 7920-00-577-4748 | II | 3 | 12 | B3/12 |
| 7920-00-577-4744 | II | 4 | 10 | B4/10 |
| 7920-00-577-4745 | II | 4 | 12 | B4/12 |
| 7920-00-577-4746 | II | 4 | 16 | B4/16 |
| 7920-00-577-4754 | II | 3 | 10 | B3/10R (blade only) |
| 7920-00-577-4755 | II | 3 | 12 | B3/12R (blade only) |
| 7920-00-577-4756 | II | 3 | 16 | B3/16R (blade only) |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:17Z
Check the source to verify that this is the current version before use.

7.5 Referenced documents.

Federal specifications and standards are available from the General Services Administration, Federal Supply Service Bureau, Specification Section, Suite 800, 470 East L'Enfant Plaza SW, Washington, DC 20407.

Copies of ASTM standards can are available from ASTM, 100 Bar Harbor Dr., West Conshohocken, PA 19428-2959.

Preparing Activity
GSA - FSS



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:17Z
Check the source to verify that this is the current version before use.