[METRIC]

A-A-2790
June 25, 1992

COMMERCIAL ITEM DESCRIPTION

ENVELOPE, TRANSPARENT

The General Services Administration has authorized the use of this Commercial Item Description in lieu of Interim Federal Specification L-E-00530, which is cancelled.

This commercial item description covers transparent envelopes used to contain and protect paper, cards, and similar material.

CLASSIFICATION: Unless otherwise specified, the envelopes shall be of the following types, styles, classes and sizes, as specified (see paragraph 6).

Type I - Bound edges
Type II - Sealed edges

Style A - With holes
  Class 1 - one hole (see Fig. 1)
  Class 2 - two holes (see Fig. 1)
  Class 3 - three holes (see Fig. 1)
Style B - Without holes

Size 1 - Length - 21 cm (8-1/4"); Width - 12.7 cm (5")
Size 2 - Length - 23.5 cm (9-1/4"); Width - 14 cm (5-1/2")
Size 3 - Length - 26.7 cm (10-1/2"); Width - 16.5 cm (6-1/2")
Size 4 - Length - 31.8 cm (12-1/2"); Width - 25.4 cm (10")
Size 5 - Length - 33 cm (13"); Width - 25.4 cm (10")
Size 6 - Length - 43.2 cm (17"); Width - 28 cm (11")

1. SALIENT CHARACTERISTICS:


A. Construction. Unless otherwise specified, the envelopes shall be made of colorless, transparent, commercially acceptable plastic material. Style A envelope's front leaf shall be 20 mm (3/4") shorter than the back leaf. Style A's extended portion of the back leaf shall be covered with binding. The Style A envelopes shall be fitted with holes located as specified for Class 1, 2, and 3 (see Fig. 1 below). The holes shall contain the eyelets which shall be made of commercially acceptable corrosion resistant metal with an inside diameter of not less than 6.5 mm (1/4"). The Style B envelopes shall be without holes and its front leaf shall be 5 mm (3/16") shorter than the back leaf.

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

FSC 7510

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

Fig. 1
Holes locations for Style A

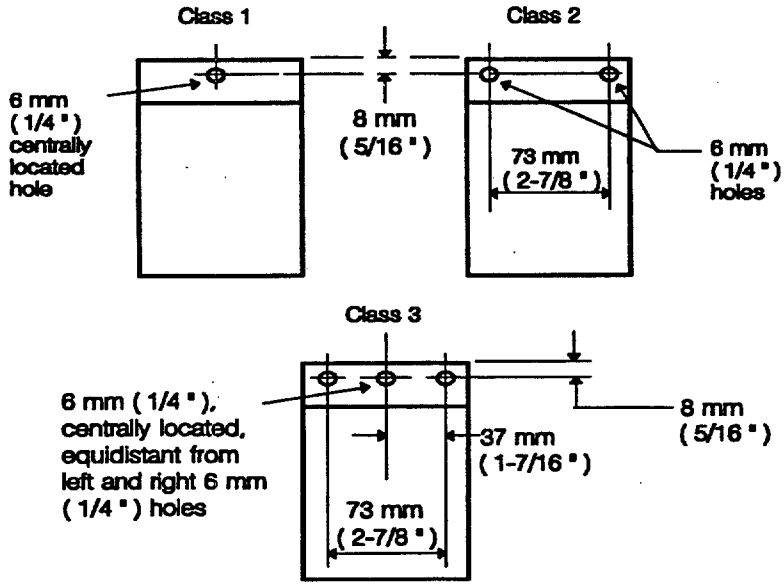

1). Type I. The plastic shall have a glazed finish on both sides. Two sheets of plastic shall be used for each envelope. The plastic sheets shall be securely bound together with binding on two sides and one end to form an open-end envelope. The binding shall be of black color, made of any commercially acceptable material. Binding shall be sewed to form a minimum 8 mm (5/16") facing around all edges. The binding shall be stitched with stitch type 301 as described in Fed. Std. No. 751 at a distance of not less than 3 mm (1/8") and not more than 5 mm (3/16") from the raw edges of the binding. The stitch holes shall be not less than 3 mm (1/8") from the unexposed edges of the plastic. The thread used for sewing shall be black, made of any commercially acceptable material.

2). Type II. The plastic shall have a matte finish on one side, and either a matte or glazed finish on the opposite side. Two sheets of plastic shall be arranged so that both outside surfaces of the envelopes have a matte finish. The sheets shall be sealed on two sides and one end to form an open-end envelope. The extended portion of the back leaf shall be reinforced with plastic for a minimum of 15 mm (9/16") from the end of the envelope. All edges of the reinforcing material shall be sealed. All seams at the plastic edges and around the holes shall be securely sealed by any commercially acceptable method.

B. Dimensions. Unless otherwise specified, the dimensions shall be as listed above, with a tolerance of ± 1.6 mm (1/16").

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

C. Physical characteristics. The material shall meet the physical requirements listed in Table 1, when tested as specified in paragraph 2.

Table 1

	Type I	Type II	Units
Thickness, minimum	0.190 (0.0075)	0.254 (0.0100)	mm (inches)
Haze, maximum	6.0	6.0	%
Flammability, maximum	240 (90)	240 (90)	cm/min (inches/min)
Tear Resistance, minimum	128 (7.0)	61 (3.5)	Newtons/100 mm (lb_f/inch of thickness)
Seam Breaking Factor, minimum	613 (35)	263 (15)	Newtons/100 mm (lb_f/inch of seam length)
Binding Breaking Factor, minimum, both directions	525 (30)	- -	Newtons/100 mm (lb_f/inch of width)

D. Workmanship. The plastic material shall be uniform in transparency and surface finish, and shall be free from gels, scratches, cracks, blisters, pits, tears, cuts, holes, fish eyes, creases, and unmelted material. Plastic edges shall be straight, smooth, and cleanly cut. The binding material shall be uniform in color and evenly coated. Stitching and sealed seams shall be straight, of good appearance, and free from skips and gaps. The plastic of fabricated envelopes shall be flat and free from waviness. Envelopes shall be clean, well finished, free from dirt, oil, foreign matter, or other defects which may affect appearance or serviceability.

2. QUALITY ASSURANCE:

A. Responsibility for Inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

B. Sampling. Samples shall be selected for inspection in accordance with MIL-STD-105, using the plans described in Table 2. A lot shall consist of a number of sample units manufactured by the same process from the same components at the same time. Random samples shall be drawn from each lot for the end item inspection. Unless otherwise specified, every lot shall be tested.

TABLE 2

Inspection Type	AQL (%) defective	Inspection Level	Sample Unit	Requirement Paragraph
Construction & Workmanship	2.5	II	one envelope	1A 1D
Dimensions	2.5	II	one envelope	1B
Physical Characteristics	2.5	S-1	one envelope	1C
Packaging, Packing & Marking	4.0	S-2	one shipping container	4

C. Testing.

1). Thickness shall be tested in accordance with ASTM D 374. Method C.

2). Haze shall be tested in accordance with ASTM D 1003.

3). Flammability shall be tested in accordance with ANSI/ASTM D 568.

4). Tear resistance shall be tested in accordance with ASTM D 1004.

5). Seam Breaking Factor shall be tested in accordance with ASTM D 882, using Test Method A, and Rate of Loading of 50 ± 13 mm/minute (2 ± 1/2 inches/minute). A convenient size sample shall be used with the seam located midway between the clamps.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

6). Binding Breaking Factor shall be tested in accordance with ASTM D 882, using Test Method A, and Rate of Loading of 50 ± 13 mm/minute (2 ± 1/2 inches/minute).

* NOTE: Certificates of compliance are acceptable for tests 1, 2, 3 & 4 above. When certificates of compliance are submitted, the Government reserves the right to determine the validity of the certification. For tests 5 & 6 above, the actual end item tests are required.

3. REGULATORY REQUIREMENTS: The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580, as amended, to the maximum extent practicable.

4. PACKAGING, PACKING, AND MARKING: Packaging, packing, and marking shall be as specified in the contract or order.

5. REFERENCED DOCUMENTS: The issue of the referenced documents in effect on the date of the solicitation for offers or request for proposals shall be used to determine conformance with the requirements of this Commercial Item Description.

A. ASTM References:

ASTM D 374 - Standard Test Methods for Thickness of Solid Electrical Insulation

ANSI/ASTM D 568 - Standard Test Method for Rate of Burning and/or Extent and Time of Burning of Flexible Plastics in a Vertical Position

ASTM D 882 - Standard Test Method for Tensile Properties of Thin Plastic Sheeting

ASTM D 1003 - Standard Test Method for Haze and Luminous Transmittance of Transparent Plastics

ASTM D 1004 - Standard Test Method for Initial Tear Resistance of Plastic Film and Sheeting

Available from: ASTM. 1916 Race Street, Philadelphia, PA, 19103

B. Public Law:

Public Law 94-580 - Resource Conservation and Recovery Act, (Part of U.S. Code, Title 42)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

C. Federal Standard:

Fed. Std. No. 751 - Stitches, Seams, and Stitchings.

Single copies of Federal Specifications and Standards required by activities outside the Federal Government for bidding purposes are available without charge from General Services Administration Business Service Centers in Boston, MA; New York, NY; Washington, DC; Atlanta, GA; Chicago, IL; Kansas City, MO; Fort Worth, TX; Denver, CO; San Francisco, CA; Los Angeles, CA; and Auburn, WA.

D. Military Standard

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes

Available from: Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094

6. NOTES: Purchasers shall specify.

A. Title, number, and date of this commercial item description.
B. Type, style, class, and size required.
C. Packaging, packing, and marking required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

D. Item Identifiers/Reference Part Number System
(for cataloging use only)

AA2790 - 2 A 3 E

This example describes 13-inch long by 10-inch wide, sealed edges envelope with three holes located as shown in Fig. 1 of the Commercial Item Description A-A-2790.

A-Size 1 - Length - 8-1/4 inches; Width - 5 inches
B-Size 2 - Length - 9-1/4 inches; Width - 5-1/2 inches
C-Size 3 - Length - 10-1/2 inches; Width - 6-1/2 inches
D-Size 4 - Length - 12-1/2 inches; Width - 10 inches
E-Size 5 - Length - 13 inches; Width - 10 inches
F-Size 6 - Length - 17 inches; Width - 11 inches

1-Class 1 - one hole (see Fig. 1)
2-Class 2 - two holes (see Fig. 1)
3-Class 3 - three holes (see Fig. 1)

A-Style A - With holes
B-Style B - Without holes

1-Type I - Bound edges
2-Type II - Sealed edges

MILITARY INTERESTS:

Coordinating activities:

Army - GL

Custodians:

Air Force - 99

Reviewing activities:

Air Force - 84

PREPARING ACTIVITY:

GSA - FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.