A-A-51196
February 20, 1991

COMMERCIAL ITEM DESCRIPTION

PRESS, ARBOR, MECHANICAL, HAND OPERATED, ELEVATING KNEE

The General Services Administration has authorized the use of this commercial item description in preference to MIL-P-80261, type III, class 1, style A.

Abstract. This description covers floor type, hand operated, mechanical arbor presses with an elevating knee which are used to force arbors into and out of holes or to assemble and disassemble parts.

Classification. The presses shall be of one type and class and of the following sizes. The size to be furnished shall be as specified (see ordering data).

Size 5 - 5 ton		Size 12 - 12 ton	
Size 7 - 7 ton		Size 15 - 15 ton	

Salient characteristics.

1. Frame. The frame shall be of the "C" (gap) type. The frame shall support the ram, ram operating mechanism, and an adjustable knee with a work plate. The knee shall be adjustable for the desired working heights. The means for raising and lowering the knee shall be the manufacturer's standard design offered to the commercial market. The frame table shall have a slot aligned with the axis of the ram which will allow passage of an arbor. The frame shall be designed for mounting onto a bench, or a pedestal.

2. Work support plate. The work support plate shall be circular with not less than four equally spaced slots for the passage of an arbor. The work support plate shall be removable and shall allow the desired plate slot to be positioned below the ram.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to: Defense Industrial Plant Equipment Center, ATTN: DIPEC-SSG, 2163 Airways Blvd., Memphis, TN 38114-5051.

AMSC N/A FSC 3444

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:52Z
Check the source to verify that this is the current version before use.

3. Ram and ram operating mechanism. The ram shall be of the rack and pinion type, and shall have a ratchet and pawl between the lever and pinion. A counterweight shall be mounted to the lever and ratchet for quick return of the ram after pressing is complete. A hand wheel shall be provided for moving the ram up or down while positioning workpieces.

4. Radius of work. The radius of work is defined as the distance from the center of the ram to the frame. Unless otherwise specified (see ordering data), the radius of work for the press to be furnished shall be selected from table I. The tolerance of the radius of work shall be ± 0.5 inch.

TABLE I. Radius of work.

Radius of work (in)	Radius of work designation		Radius of work (in)	Radius of work designation
7.5	1		11.0	3
9.0	2		12.5	4

NOTE: Largest diameter of work is 2 times the radius. The radius of work designation is for use in developing the CID based part identification number only (see NOTES, page 4).

5. Vertical capacity. The vertical capacity is defined as the distance when measured from the top of table surface to ram (ram up). The vertical capacity for the press to be furnished shall be as specified and selected from table II. The tolerance of the vertical capacity shall be ± 1 inch.

TABLE II. Vertical capacity.

Distance ram to table (in)	Vertical capacity		Distance ram to table (in)	Vertical capacity
12.0	1		18.0	5
12.5	2		21.0	6
16.0	3		23.0	7
17.5	4			

NOTE: The vertical capacity is for use in developing the CID based part identification number only (see NOTES, page 4)

Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within specified tolerances using conversion tables contained in the latest revision of FED-STD-376, and all other requirements of this commercial item description are met.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:52Z
Check the source to verify that this is the current version before use.

If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request shall be made to the contracting officer to determine if the product is acceptable.

The contracting officer has the option of accepting or rejecting the product.

Regulatory requirements. In accordance with section 23.403 of the Federal Acquisition Regulations, the Government's policy is to acquire items composed of the highest percentage of recovered materials practicable, consistent with maintaining a satisfactory level of competition without adversely affecting performance requirements or exposing suppliers' employees to undue hazards from the recovered materials.

Environmental protection. During the manufacture of the press, materials hazardous to the ecological system as prohibited by the Federal, state, or local statutes in effect on the date of the contract shall not be used or emitted.

Preservation, packaging, packing, labeling, and marking. Preservation, packaging, packing, labeling, and marking shall be as specified in the contract or order.

Quality assurance.

Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection, examination, and test requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections, examinations, or tests set forth in this description where such inspections, examinations, and tests are deemed necessary to assure supplies and services conform to prescribed requirements.

Responsibility for compliance. All items shall meet the requirements specified herein. The inspection set forth in this description shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the description shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

Sampling inspection. Sampling inspection shall be performed in accordance with MIL-STD-105. Sampling shall be at level II with an AQL of 4.0.

Performance test. Each press selected for sample inspection shall be operated through the full vertical range. The press shall not have any binding or indication of improper operation.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T08:52Z
Check the source to verify that this is the current version before use.

Tonnage test. Each press selected for sample inspection shall be tested to determine compliance with the tonnage requirements for the size specified.


Alignment test. Each press selected for sample inspection shall be tested to determine compliance with the alignment requirements of paragraph 1.

NOTES.

Ordering data. Purchasers should select the preferred options permitted herein, and include the following information in procurement documents:

a. Specify title, number, and date of this commercial item description
b. Specify size
c. Specify radius of work
d. Specify vertical capacity
e. Specify quantity required

CID based part identification number. The following part identification numbering procedure is for Government purposes and does not constitute a requirement for the contractor. The radius of work designation found in table I and the vertical capacity designation found in table II are for use in developing the part identification numbering only.

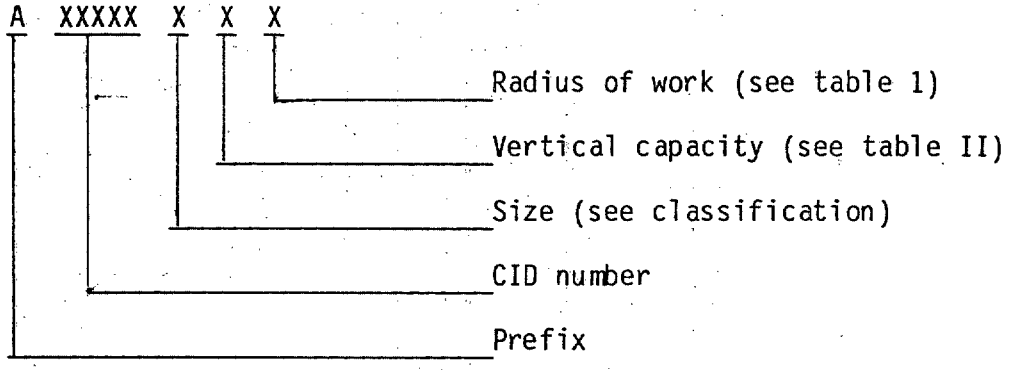

FED-STD-376 and MIL-STD-105 are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19120-5099.

Supersession data. This commercial item description covers items previously covered in MIL-P-80261, type III, class 1, style A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:52Z
Check the source to verify that this is the current version before use.

MILITARY INTEREST:

Custodians

Army - AL
Navy - SH
Air Force - 99

Review Activities

Navy - YD
Air Force - 84
DLA - GS

User Activities

Army - AV, ME, WV
Navy - AS, MC

CIVIL AGENCY COORDINATION ACTIVITY:

GSA - FSS

PREPARING ACTIVITY:

DLA - IP

Project 3444-0026

Source: https://assist.dla.mil - Downloaded: 2026-10-26T08:52Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. *The preparing activity must* complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	A-A-51196	91 - 02 20

3. DOCUMENT TITLE

PRESS, ARBOR, MECHANICAL, HAND OPERATED, ELEVATING KNEE

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
Defense Industrial Plant Equipment Center ATTN: DIPEC-SSG	(1) Commercial (901)-775- 6247	(2) AUTOVON 683-6247
c. ADDRESS (Include Zip Code) 2163 Airways Blvd. Memphis, TN 38114-5051	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 2008-05-21
Check the source to verify that this is the current version before use.