MIL-C-45360E(AT)
28 June 1978
SUPERSEDING
MIL-C-45360D(AT)
17 September 1971

MILITARY SPECIFICATION

CARRIERS, PERSONNEL, FULL-TRACKED: ARMORED, M113 AND M113A1; AND MORTARS, SELF-PROPELLED: 107MM M106 AND M106A1; AND 81MM, M125A1; PROCESSING FOR STORAGE AND SHIPMENT OF

This specification is approved for use by US Army Tank-Automotive Materiel Readiness Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the processing of the M113 and M113A1 Armored, Full-Tracked, Personnel Carriers; and the 107MM, M106 and M106A1, and 81MM, M125A1 Self-Propelled Mortars meeting the requirements of Levels A and B processing (see 1.2 and 6.1).

1.2 Classification. Processing shall be of the following levels, as specified (see 6.2).

Level A - Maximum military protection.

Level A is the processing required for the protection of vehicle during shipment, handling, and storage exceeding 90 days from date of actual processing. This level does not provide for driveaway capability. It does provide for domestic or overseas shipment, including open deck loading.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Tank-Automotive Materiel Readiness Command, ATTN: DRSTA-GSS, Warren, MI 48090, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document, or by letter.

FSC PACK

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:48Z
Check the source to verify that this is the current version before use.

Level B - Minimum military protection.

Level B is the limited processing required for the protection of vehicle during shipment, handling, and storage not to exceed 90 days from date of actual processing. This level provides for driveaway capability, when specified, and domestic or overseas shipment (excluding open deck loading).

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

O-I-490	- Inhibitor, Corrosion, Liquid Cooling System.
O-S-576	- Sodium Bicarbonate, Technical.
P-D-220	- Detergent, General Purpose.
GG-T-250	- Tester, Antifreeze Solutions.
QQ-S-781	- Strapping, Steel, Flat and Seals.
TT-E-529	- Enamel, Alkyd, Semi-gloss.
TT-I-1795	- Ink, Marking, Stencil, Opaque (Porous and Nonporous Surfaces).
TT-V-121	- Varnish, Spar, Water-resisting.
UU-P-268	- Paper, Kraft, Wrapping.
UU-T-81	- Tags, Shipping and Stock.
VV-F-800	- Fuel Oil, Diesel.
VV-L-800	- Lubricating Oil, General Purpose, Preservative (Water-displacing, Low Temperature).
ZZ-T-416	- Tire, Pneumatic, Retread and Repair Materials.
MMM-A-178	- Adhesive, Paper Label, Water-resistant.
PPP-B-566	- Box, Folding, Paperboard.
PPP-B-636	- Box, Shipping, Fiberboard.
PPP-P-291	- Paperboard, Wrapping and Cushioning.
PPP-T-42	- Tape, Packaging/Masking, Paper.
PPP-T-60	- Tape, Packaging, Waterproof.
PPP-T-97	- Tape, Pressure-sensitive Adhesive, Filament Reinforced.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:48Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-P-116	- Preservation-Packaging, Methods of.
MIL-B-117	- Bag, Sleeve and Tubing - Interior Packaging.
MIL-B-121	- Barrier Material, Greaseproofed, Waterproofed, Flexible.
ML-S-207	- Sulfuric Acid, Electrolyte, Packaging, Packing, and Marking for Shipment and Storage of.
MIL-C-450	- Coating Compound, Bituminous Solvent Type, Black (for Ammunition).
MIL-G-3056	- Gasoline, Automotive, Combat.
MIL-C-5501	- Cap and Plug, Protective, Dust and Moisture Seal.
MIL-H-6083	- Hydraulic Fluid, Petroleum Base, for Preservation and Operation.
MIL-G-10924	- Grease, Automotive and Artillery.
MIL-B-11188	- Battery, Storage, Lead Acid.
MIL-A-11755	- Antifreeze, Arctic-type.
MIL-B-12841	- Basic Issue Items for Military Vehicles, Carriages and Equipment, Preparation for Shipment and Storage of.
MIL-P-13983	- Paint, Temporary, Lusterless, Gasoline Removable.
MIL-P-14232	- Parts, Equipment and Tools for Army Material, Packaging and Packing of.
MIL-C-16173	- Corrosion Preventive Compound, Solvent Cutback, Cold Application.
MIL-D-16791	- Detergent, General Purpose (Liquid, Nonionic).
MIL-L-21260	- Lubricating Oil, Internal Combustion Engine, Preservative and Break-in.
MIL-T-22085	- Tape, Adhesive, Preservation and Sealing.
MIL-B-22191	- Barrier Materials, Transparent, Flexible, Heat Sealable.
MIL-P-46002	- Preservative Oil, Contact and Volatile Corrosion Inhibited.
MIL-A-46153	- Antifreeze, Ethylene Glycol Inhibited, Heavy Duty, Single Package.
MIL-T-50036	- Talc, Technical, Tl.
MIL-D-81298	- Dye, Liquid Red, for the Detection of Leaks in Aircraft Fuel Systems.

STANDARDS

MILITARY

MIL-STD-129	- Marking for Shipment and Storage.

Source: https://assist.dla.mil -- Downloaded: 202640-22T02:48Z
Check the source to verify that this is the current version before use.

PUBLICATIONS

TB ORD 392 - Tank Automotive, Gasoline Engines, Lubrication Before Use.

(Copies of specifications, standards and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ASSOCIATION OF AMERICAN RAILROADS PUBLICATIONS

Section No. 1 - General Rules Governing Loading of Commodities on Open Top Cars.
Section No. 6 - Rules Governing the Loading of Department of Defense Material on Open Top Cars.

(Application for copies should be addressed to the Association of American Railroads, 59 East Van Buren, Chicago, Illinois 60605.)

DEPARTMENT OF TRANSPORTATION

Hazardous Materials Regulations

(Application for copies should be addressed to the Department of Transportation, Hazardous Materials Regulations Board, Washington, DC 20590.)

DEPARTMENT OF TRANSPORTATION

Federal Motor Carrier Safety Regulations

(Application for copies should be addressed to the Department of Transportation, Bureau of Motor Carrier Safety, Washington, D.C. 20590.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:48Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Level A.

3.1.1 One of the first ten production processed vehicles. Unless otherwise specified (see 6.2), one of the first ten production processed vehicles shall be subjected to the inspection specified in 4.2. Approval of one of the first ten production processed vehicles shall not relieve the contractor of his obligation to process all vehicles in accordance with this specification. Except as otherwise specified by the procuring activity, any change to materials or design after approval of one of the first ten production processed vehicles shall require an additional production processed vehicle be inspected as specified in 4.2. Government representative shall select the vehicle to be inspected.

3.1.2 Government furnished equipment. Unless previously accomplished, government furnished equipment (GFE) (other than installed) shall be packaged, packed and marked in accordance with the individual document for the specific item. GFE shall be stowed with basic issue items (BII).

3.1.3 Preservatives and atomized spray equipment. When atomized spraying of preservative oils is specified, equipment shown in figures 2 and 3, or equivalent, shall be used. Compressed air supply lines shall be equipped with moisture separators every 50 feet or fraction thereof.

3.1.4 Processing records. Records of vehicle processing shall be maintained and shall be readily available for review by Government representative.

3.1.5 Disassembly. Projecting parts whose removal will accomplish desired cube reduction and parts susceptible to damage and pilferage shall be removed from the vehicle. Removed bolts, nuts, screws, pins, and washers shall be placed in one of the mating parts and secured. Removed parts shall be preserved, packaged, and packed. Packed parts shall be identified and stowed securely within the vehicle.

3.1.5.1 Matchmarking. Parts removed from the vehicle shall be matchmarked when necessary to facilitate reassembly. Matchmarking information shall be put on cloth shipping tags conforming to Type A of UU-T-81, or on metal tags using waterproof ink or paint, and attached to mating parts. The marked cloth shipping tags shall be waterproofed with varnish conforming to TT-V-121 or adhesive conforming to MMM-A-178.

3.1.6 Record forms. Two copies of DD Form 1397 shall be provided. Information on forms shall include preservation accomplished and depreservation instructions. The Equipment Log Book Binder and one copy of DD Form

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:48Z
Check the source to verify that this is the currentversion before use.

1397 (see 6.4) shall be placed in a bag conforming to Type I, Class B, Style 2, 6 mil of MIL-B-117; bag shall be closed by heat sealing and securely attached in driver's compartment of the vehicle. The other copy of DD Form 1397 shall be waterproofed with adhesive conforming to MMM-A-178, or sealed in a plastic bag and securely attached in a conspicuous location on the exterior of the vehicle.

3.1.7 Cleaning and drying (see 4.5.2.1).

3.1.7.1 Interior of vehicle. Interior surfaces of vehicle shall be cleaned with a solution of detergent conforming to P-D-220 or Type 1 of MIL-D-16791 and warm water. Water or other liquid under pressure or steam cleaning shall not be used. After cleaning, cleaned surfaces shall be rinsed with clean water and dried. Care shall be taken during cleaning and rinsing to assure that no liquids enter instruments, connections, or other components susceptible to water damage and that water does not accumulate in areas where it cannot drain or be dried.

3.1.7.1.1 Cleaning and drying of battery supports and retainers. Battery supports and retainers shall be cleaned with a solution of one-half pound of sodium bicarbonate conforming to O-S-576 per gallon of water. After cleaning, cleaned surfaces shall be flushed with clean water, then thoroughly dried. Dried surfaces shall then be preserved in accordance with 3.1.8.2.

3.1.7.1.2 Cleaning and drying of backrests and seats. Backrest and seat cushions shall be cleaned with a solution of detergent conforming to P-D-220, or Type 1 of MIL-D-16791, in warm water. After cleaning, cushions shall be wiped with cloths saturated with clean water to remove cleaning solution. Care shall be taken not to saturate the cushions with cleaning solution or water. After rinsing, cushions shall be dried, then protected in accordance with 3.1.9.3.

3.1.7.2 Exterior of vehicle. Exterior of vehicle shall be cleaned using a solution of detergent conforming to P-D-220, or Type 1 of MIL-D-16791, in warm water or steam. Cleaning shall remove all foreign matter. After cleaning, cleaned surfaces shall be rinsed with clean water or steam and thoroughly dried. Care shall be taken to avoid entry of water or steam into driver's or engine compartments.

3.1.8 Preservation.

3.1.8.1 Relubrication. If vehicle has been operated more than 50 miles since lubrication, or after vehicle has been cleaned in accordance with 3.1.7.2, the vehicle shall be relubricated using materials conforming to

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:48Z
Check the source to verify that this is the current version before use.

drawings, specifications, or lubrication order applicable to the vehicle. All exposed oil can points such as, but not limited to, levers, locking levers, locking bars, locking pins, pintle pins, hinge pins, hinges, strikers, wing nuts, door locks, hand-operated locking knobs, latches, linkage, and threaded ends of yokes and related clevis pins shall be coated with lubricant conforming to VV-L-800. Excess lubricant shall be removed after coating.

3.1.8.2 Preservation of battery supports and retainers. Top battery supports and retainers shall be preserved with compound conforming to MIL-C-450.

3.1.8.3 Transmission, transfer assembly, control differential and final drives. Transmission shall contain lubricating oil conforming to Type 1, Grade 10 of MIL-L-21260 filled to operating level. Transfer assembly, control differential, and final drives shall contain lubricating oil conforming to Type 1, Grade 10 or 30, as applicable, of MIL-L-21260 filled to operating level. DD Form 1397 shall be annotated with type and grade of lubricant used (see 3.1.6).

3.1.8.4 Cooling system. Cooling system shall be protected by one of the following procedures:

a. For shipment to, and storage in, areas where the temperature drops below minus 40 degrees Fahrenheit (-40°F), systems shall be protected as specified in 3.1.8.4.3.
b. For shipment and storage within the bounds of 30 degrees north latitude and 20 degrees south latitude, except continental United States, systems shall be protected as specified in 3.1.8.4.2.
c. For all other shipments, cooling systems shall be protected as specified in 3.1.8.4.1.

NOTE: DD Form 1397 (see 3.1.6) shall be completed to indicate coolant used.

3.1.8.4.1 Water and antifreeze procedure. Cooling system shall be filled to operating level with a clean solution consisting of equal parts by volume of antifreeze (ethylene glycol) conforming to MIL-A-46153, and water. Engine shall be operated until a temperature has been reached that causes thermostat to open, to assure complete mixing and even distribution of the antifreeze solution. A warning tag, bearing the information "COOLING SYSTEM FILLED WITH WATER AND ANTIFREEZE SOLUTION (ETHYLENE GLYCOL) IN EQUAL PARTS BY VOLUME - DO NOT DRAIN", shall be securely attached to radiator filler neck.

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:48Z
Check the source to verify that this is the current version before use.

3.1.8.4.2 Water and corrosion inhibitor procedure. Cooling system shall be filled with clear water up to, but not including the radiator upper tank. A corrosion inhibitor conforming to O-I-490 shall be added in the proportion of five ounces of the inhibitor for each ten quarts of water. The inhibitor shall be dissolved in two quarts of warm water and poured into the radiator while the engine is idling. More water shall be added, if necessary, to fill the radiator to operating level. A warning tag, bearing the information "COOLING SYSTEM DOES NOT CONTAIN ANTIFREEZE - FILLED WITH WATER AND INHIBITOR", shall be securely attached to radiator filler neck.

3.1.8.4.3 Antifreeze compound procedure. Cooling system shall be filled to operating level with antifreeze compound conforming to MIL-A-11755. The compound shall be used without dilution. A warning tag, bearing the information "COOLING SYSTEM FILLED WITH ANTIFREEZE (ARCTIC-TYPE) - DO NOT DRAIN", shall be securely attached to radiator filler neck.

3.1.8.5 Engine crankcase preservation. Crankcase of compression or spark ignition engine shall be filled to operating level with lubricating oil conforming to Type 1 of MIL-L-21260 of the seasonal grade specified in the applicable drawing, specification, or lubrication order. DD Form 1397 shall be annotated with type and grade of lubricant used.

3.1.8.6 Spark ignition engine. Spark ignition engine preservation shall be in accordance with 3.1.8.6.2 and 3.1.8.6.3 in an uninterrupted sequence, except for the cooling period specified in 3.1.8.6.3.

3.1.8.6.1 Spark plugs. Spark plugs shall be removed, individually packaged in accordance with Method IA-8 of MIL-P-116, and packed together in a box conforming to Style II, Type D, Class A of PPP-B-566. Box shall be closed with tape conforming to Type III, Class 1 of PPP-T-60, identified as to contents, and securely stowed in a conspicuous location within the engine compartment. Slave spark plugs shall be installed. Engine shall be preserved in accordance with 3.1.8.6.2 and 3.1.8.6.3.

3.1.8.6.2 Preservation through fuel system and carburetor. One compartment of a two compartment container shall be filled with lubricating oil conforming to Type I, Grade 10 of MIL-L-21260, and the other with gasoline conforming to MIL-G-3056. The container shown in figure 1 has proven satisfactory for engine preservation. The container shall be positioned to provide gravity feed. The fuel line shall be disconnected from the fuel tank side of the fuel filter sediment bowl and the line from the auxiliary container shall be connected to the filter.

Source: https://assist.dla.mil -- Downloaded: 20261O-22T02:48Z
Check the source to verify that this is the current version before use.

Container selector valve shall be turned to fuel position. Engine shall be started and operated at 1200 revolutions per minute (rpm), without load, until running smoothly, but for not more than four minutes, then accelerated to 2500 rpm for two minutes. Then the container selector valve shall be turned to oil position. The instant engine begins to misfire, ignition switch shall be turned off. The line from the auxiliary container shall be disconnected, and the vehicle fuel line shall be reconnected. Fuel filter shall then be drained.

3.1.8.6.3 Preservation through spark plug openings. After preservation in accordance with 3.1.8.6.2, engine shall be cooled until cylinder head temperature does not exceed 100°F measured at spark plug gasket surface of all cylinders. Cooling shall be accomplished by forced air currents, by circulation of engine coolant, or by waiting the period of time necessary for the cylinder heads to cool to 100°F. When ambient temperature exceeds 100°F, the engine shall be cooled to ambient temperature. Slave spark plugs shall be removed. While the engine is being turned over with the starter, a quantity of lubricating oil conforming to Type I, Grade 10 of MIL-L-21260 shall be atomized through each spark plug opening to assure complete coverage of all surfaces within the combustion chamber. The amount of oil to be used per cylinder per application shall not exceed one ounce unless a greater quantity is necessary to obtain the required coverage. After completion of the first application, a second application shall be made to each cylinder without cranking the engine. The equipment shown in figures 2 and 3 has proven satisfactory for engine preservation.

NOTE: If the 3-7/8 inch nozzle extension shown in figure 2 is too short to enter spark plug openings, a longer extension may be used.

Female threads of spark plug ports shall be coated with lubricating oil conforming to Type I, Grade 10 of MIL-L-21260, and each port shall be sealed immediately with a plastic plug conforming to MIL-C-5501. A red warning tag, bearing the information "ENGINE PRESERVED FOR STORAGE: DO NOT CRANK - FOR DEPRESERVATION WITH OR WITHOUT PRE-OILING, INSTALL SLAVE PLUGS AND OPERATE ENGINE TO BURN OFF EXCESS OIL. AFTER BURN OFF, REMOVE SLAVE PLUGS AND INSTALL PLUGS STOWED IN ENGINE COMPARTMENT", shall be attached securely in a conspicuous location within driver's compartment. DD Form 1397 shall be annotated with the type and grade of lubricating oil used.

3.1.8.7 Compression ignition engine. Compression ignition engine preservation shall be in accordance with 3.1.8.7.1 through 3.1.8.7.3 in an uninterrupted sequence.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:48Z
Check the source to verify that this is the current version before use.

3.1.8.7.1 Fuel system and combustion chamber. Prior to processing, engine shall be cooled to assure that cylinder head temperature, measured at injector nozzle flange surface of all cylinders, is not more than 100°F. Cooling shall be accomplished by induced air currents, circulation of engine coolant, or by waiting the period of time required to arrive at the above specified temperature. When ambient temperature exceeds 100°F, engine shall be cooled to ambient temperature.

3.1.8.7.1.1 Fuel system preservation. After the engine has been cooled, the fuel supply system from the fuel tank shall be shut off. A portable container with two compartments shall be positioned to provide gravity feed to the engine. One compartment shall be filled with preservative oil conforming to Grade 1 of MIL-P-46002 to which has been added an oil soluble red dye conforming to MIL-D-81298, in a concentration sufficient to impart a marked coloring to the oil. The second compartment shall be filled with diesel fuel conforming to VV-F-800. (The container shown in figure 1 has proven satisfactory for engine preservation.)

3.1.8.7.1.2 Fuel injector lines. Disconnect the fuel line between the primary fuel filter and fuel pump at the primary fuel filter outlet. Drain the diesel fuel from the secondary fuel filter. Remove filter can and remove filter element. Fill filter can with preservative oil, Grade 1, MIL-P-46002 and replace. Connect fuel line from auxiliary fuel container to fuel pump supply line. Disconnect vehicle fuel return line at quick disconnect coupling. Connect a transparent plastic fuel line to the engine end of the disconnected fuel return line, insert the other end of plastic fuel line into a recovery container to collect the returned oil.

3.1.8.7.1.3 Restricted air intake. Disconnect air cleaner hose from the air inlet elbow. An air restrictor boot shall be installed on air inlet elbow and secured to assure that air to the engine is completely cut off. (The air restrictor boot shown in figure 5 has proven satisfactory for engine preservation.) The regulator valve on the auxiliary fuel container shall be turned to the preservative oil position (Grade 1, MIL-P-46002). Place engine fuel control in run position. Crank engine with starter (NOTE: Engine may fire for approximately five seconds.) for a minimum period of 30 seconds and not exceeding a maximum of 45 seconds. The regulator valve on the auxiliary fuel container shall be turned to the off position. Remove the filter can from the secondary fuel filter. Drain the preservative oil, Grade 1, MIL-P-46002, from can. Wipe clean with lint free cloth. Replace element, fill can with diesel fuel oil VV-F-800, and replace filter can (see 4.5.2.4).

Source: https://assist.dla.mil -- Downloaded: 202640-22T02:48Z
Check the source to verify that this is the currentversion before use.

CAUTION: Special precautions shall be taken to assure that time limits specified shall not be exceeded, or the engine starter or starter solenoid may be damaged. Also, excessive cranking could cause hydrostatic lock.

3.1.8.7.2 Engine purging. Purge fuel return lines of all preservative oil, Grade 1, MIL-P-46002, by turning the auxiliary fuel tank valve to the diesel fuel position and closing engine fuel control shut off. Crank engine with starter for a period of time to remove all traces of red colored lubricating oil from the plastic return line.

CAUTION: Do not operate starter for a period exceeding 45 seconds.

If preservative oil has not been purged, rest starter for three minutes and repeat purge procedure. Turn the auxiliary fuel container valve to the off position. Remove fuel line and reconnect to the outlet side of primary fuel filter. Turn on vehicle fuel supply system. Remove air restrictor boot. Disconnect plastic fuel return line, and reconnect vehicle fuel return line at the quick disconnect coupling (see 4.5.2.4).

3.1.8.7.3 Preservation through air intake and exhaust system. After preservation in accordance with 3.1.8.7.1 and 3.1.8.7.2, one ounce of preservative oil conforming to Grade 1 of MIL-P-46002 shall be atomized into exhaust opening. Opening shall then be sealed with tape conforming to Type IV, Class 1 of PPP-T-60 or Type II of MIL-T-22085. The hose shall be disconnected at the air intake, and one ounce of preservative oil, conforming to Grade 1, MIL-P-46002, shall be atomized into the air intake opening. The air intake opening and the engine crankcase breathers shall be sealed with plastic plugs conforming to MIL-C-5501 or with tape conforming to Type IV, Class 1 of PPP-T-60 or Type II of MIL-T-22085. A red warning tag, bearing the information "ENGINE PRESERVED WITH VCI - DO NOT CRANK" and "BEFORE CRANKING, REMOVE CAPS, TAPE, OR PLUGS, AND REINSTALL HOSE", shall be placed in a conspicuous location within driver's compartment. DD Form 1397 shall be annotated to show engine is preserved with VCI and oil (see 4.5.2.4).

3.1.8.7.4 Preservation through oil level gage rod opening. After preservation in accordance with 3.1.8.7.1 and 3.1.8.7.2, the oil level gage rod shall be removed, and six ounces of preservative oil conforming to Grade 1 of MIL-P-46002 shall be atomized into the crankcase through the oil level gage rod opening. An extension of sufficient length to permit the spray nozzle to be within the crankcase shall be used. Spray nozzle shall not be submerged in the crankcase oil. After spraying has been accomplished, oil level gage rod shall be reinstalled. All openings to the engine interior, including oil level gage rod opening and oil filler cap, shall be sealed with tape conforming to Type IV, Class 1 of PPP-T-60 or Type II of MIL-T-22085 (see 4.5.2.4)

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:48Z
Check the source to verify that this is the current version before use.

3.1.8.7.5 Preservation through flywheel housing. Two ounces of preservative oil conforming to Grade 1 of MIL-P-46002 shall be atomized into the flywheel housing (see 4.5.2.4).

3.1.8.7.6 Air cleaner. Air cleaner openings shall be sealed with tape conforming to Type IV, Class 1 of PPP-T-60 or Type II of MIL-T-22085.

3.1.8.8 Personnel and engine compartment heaters and lines. Personnel and engine heaters shall have the fuel supply shut off valve located at the inlet side of fuel filters turned to the off position. The main fuel line supplying fuel to the heaters shall be disconnected at a point closest to shut off valves. Fuel from the fuel lines shall be allowed to drain. Seal ends of disconnected fuel lines and shut off valves with plastic plugs/caps conforming to MIL-C-5501, with tape conforming to Type IV, Class 1 of PPP-T-60, or with Type II of MIL-T-22085. External exhaust stack shall have opening sealed with tape conforming to Type IV, Class 1 of PPP-T-60 or Type II of MIL-T-22085. Plastic plug/cap conforming to MIL-C-5501 may be used. Four warning tags, each bearing the information "HEATER FUEL LINES DISCONNECTED AND SEALED. PRIOR TO PLACING PERSONNEL OR ENGINE HEATERS IN OPERATION, REMOVE PLUGS/CAPS OR TAPE FROM FUEL LINES, EXHAUST STACK AND SHUT OFF VALVES. OPERATE HEATER FUEL PUMP AND DRAIN A MINIMUM OF ONE QUART OF FUEL THROUGH THE FUEL LINES INTO A PORTABLE CONTAINER. RECONNECT HEATER FUEL LINES.", shall be prepared. One tag each shall be secured to the personnel and engine heater operating switches and one each to the personnel and engine heaters.

3.1.8.9 Fuel tank preservation. Fuel tank shall be drained to the maximum extent possible. Fuel tank cap and filler screen shall be removed and coated with lubricating oil conforming to Type 1, Grade 30 of MIL-L-21260. One quart of lubricating oil conforming to Type 1, Grade 10 of MIL-L-21260 shall be added to each five gallons or portion thereof of residual fuel. The contractor shall maintain a written procedure used to ascertain the amount of residual fuel. Tank cap and filler screen shall be reinstalled (see 4.5.2.2).

3.1.8.9.1 Fuel tank security. After processing the fuel tank as specified in 3.1.8.9, the armored fuel cap shall be secured with the combat lock.

3.1.8.10 Ramp winch assembly. All unpainted metal surfaces of the ramp winch assembly, excluding cylinder rod, shall be coated with preservative conforming to Grade 4 of MIL-C-16173.

3.1.8.10.1 Ramp hydraulic reservior. Ramp hydraulic reservoir shall be filled with hydraulic fluid conforming to MIL-H-6083.

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:48Z
Check the source to verify that this is the current version before use.

3.1.8.11 Machine gun pintle mount. Machine gun pintle mount shall be removed and mounting bolts and washers reinstalled. Bare metal surfaces of the pintle shall be preserved with grease conforming to MIL-G-10924 and wrapped with barrier material conforming to Type A, Grade A, Class 2 of MIL-B-121. Wrap shall be secured with tape conforming to Type IV, Class 1 of PPP-T-60. Preserved mount shall be identified and securely stowed within vehicle.

3.1.8.12 Hatches and doors. Rubber seals around hatches and doors shall be coated with powdered talc conforming to Type IV, Class C of ZZ-T-416 or talc, technical, MIL-T-50036. For shipment, hatches and doors shall be closed and locked from the inside. Driver's hatch shall be locked with a bolt and nut, with nut welded to bolt. For storage, hatches and doors shall be locked from the inside, except that the ramp door shall be secured in open position for ventilation.

3.1.8.13 Ventilation.

3.1.8.13.1 Engine compartment access plate. Engine compartment access plate and gasket, attaching hardware, and drain plugs shall be removed for ventilation. Bare metal surfaces of drain plugs shall be preserved with compound conforming to Grade 4 of MIL-C-16173. Plate, gasket, preserved drain plugs, and four access plate mounting screws and washers shall be packaged as specified in 3.1.9.9. A screen conforming to figure 4 shall be installed in access plate opening and secured with four of the existing mounting screws and washers. The information "REMOVE SCREEN, INSTALL ACCESS PLATE AND GASKET, AND DRAIN PLUGS BEFORE VEHICLE OPERATION" shall be stenciled on the exterior of the vehicle using white or yellow paint conforming to MIL-P-13983. Stenciling shall be in characters not less than 3/4 inch high.

3.1.8.13.2 Engine access compartment panels. One engine compartment panel in crew compartment shall be removed, and stowed securely in crew compartment. A warning tag, bearing the information "ENGINE COMPARTMENT PANEL REMOVED: LOWER RAMP OR OPEN HATCHES WHEN OPERATING ENGINE", shall be attached in a conspicuous location within the driver's compartment.

3.1.8.13.3 Miscellaneous preservation. Except as otherwise specified herein, all exposed, unpainted metal surfaces on the exterior of the vehicle, except the track shoes, shall be coated with compound conforming to Grade 1 of MIL-C-16173. All exposed, unpainted, unplated metal surfaces on the interior of the vehicle shall be coated with compound conforming to Grade 4 of MIL-C-16173.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:48Z
Check the source to verify that this is the current version before use.

3.1.9 Packaging.

3.1.9.1 Dry charged batteries and cables. Dry charged batteries shall be installed and secured in the vehicle battery carrier. Battery cables shall be secured to battery carrier with 3/4-inch tape conforming to Type IV of PPP-T-97. Battery filler cap openings shall be sealed by placing a 2-inch wide by 3-mil thick piece of film conforming to Type II of MIL-B-22191 over each filler cap opening with cap removed. The sheet shall be of sufficient length to allow it to be depressed into the opening to the same depth as the filler plug. Filler caps shall be screwed or inserted into openings to form a complete seal without damaging the sheet. If batteries have been processed in accordance with MIL-B-11188, they need not be reprocessed as above.

3.1.9.2 Electrolyte. Electrolyte shall be packaged, packed, and marked as specified for Type IV, Class 1, in accordance with MIL-S-207. The packed electrolyte shall be stowed with the BII and secured independently to permit separate removal.

3.1.9.3 Packaging of backrests and seats. Cushions of backrests and seats (see 3.1.7.1.2) shall be covered with paper conforming to Grade B of UU-P-268 with a minimum basis weight of 60 pounds. Paper shall be secured with tape conforming to Type I of PPP-T-42.

3.1.9.4 Periscopes. If installed, periscopes shall be removed from vehicle, cleaned, dried, and immediately packaged and packed in accordance with Level A requirements of MIL-P-116 and MIL-P-14232, then securely stowed within personnel compartment.

3.1.9.5 Fire extinguishers. Fire extinguishers shall contain a minimum of 90 percent of rated full charge. All seals shall be intact. DA Form 253 shall be completed and attached securely to each extinguisher (see 6.3).

3.1.9.6 Mortar mount (M106, M106A1, M125A1, only). Mortar mount holding brackets and hardware shall be removed and packaged in a Type CF, Class Weather-Resistant box conforming to PPP-B-636. Box shall be closed with tape conforming to Type III, Class 1 of PPP-T-60, identified as to contents, and securely stowed within the personnel compartment.

3.1.9.7 Bipod cover (M125A1 only). Bipod cover shall be removed for shipment, identified, and stowed and secured with BII packs within vehicle. Cushioning conforming to Type III, Style 1 of PPP-P-291 shall be placed between strapping and cover at points of contact.

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:48Z
Check the source to verify that this is the current version before use.

3.1.9.8 Basic issue items. Unless otherwise specified (see 6.2), BII shall be processed, packaged and packed in accordance with MIL-B-12841. BII shall be stowed and secured in accordance with 3.1.9.8.1.

3.1.9.8.1 Stowage and securement of BII. BII and items removed for shipment shall be identified to pertinent vehicle by serial number. BII shall be stored inside buildings, except during shipment. Packed BII and removed items shall be placed within the personnel compartment of vehicle. Large wooden boxes shall be placed on the vehicle floor and shall be secured with 1-1/4 inch wide strapping conforming to Type I, Class B of QQ-S-781. Strapping shall be secured to holding devices within the compartment. Smaller wooden boxes shall be secured to the larger boxes with 3/4 inch wide strapping conforming to Type I, Class B of QQ-S-781. All boxes shall be secured in such a manner as to prevent any movement during transit and to prevent damage to containers or vehicle interiors. Corner protectors shall be used under all strapping.

3.1.9.9 Access plate, gasket, and drain plugs. Access plate, gasket and preserved drain plugs (see 3.1.8.13.1) shall be packaged in a box conforming to Type CF, Class Weather-Resistant of PPP-B-636. Box shall be closed with tape conforming to Type III, Class 1 of PPP-T-60, identified as to contents, and securely stowed within personnel compartment.

3.1.9.10 Packaging of tow hooks. Tow hooks and related hardware shall be removed for shipment and packaged in a Type CF, Class Weather-Resistant box conforming to PPP-B-636. Box shall be closed with tape conforming to Type III, Class 1, of PPP-T-60, identified as to contents, and securely stowed within personnel compartment.

3.1.10 Vehicle closure.

3.1.10.1 Closure kit. Unless otherwise specified (see 6.2), each vehicle shall be provided with a vehicle protective closure kit. Closure kit shall be fabricated, assembled, and installed in accordance with Appendix A.

3.1.10.1.1 Closure marking. The information "TO LIFT VEHICLE FOR LOADING, UNFASTEN AND ROLL COVER FROM FRONT AND REAR BOWS EXPOSING LIFTING EYES - AFTER LOADING, SECURE COVER IN THE ORIGINAL POSITION" shall be stenciled on the front and rear of the closure in characters a minimum of 3/4 inch high using white enamel conforming to TT-E-529.

3.1.10.1.2 Closure disposition marking. The following information shall be stenciled on the outside, front and rear of the cover: "REUSABLE CLOSURE (COVER AND FRAMEWORK) - DO NOT DESTROY - WHEN REMOVED AND NO

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:48Z
Check the source to verify that this is the current version before use.

LONGER REQUIRED FOR PROTECTION, PACKAGE AND SHIP PER INSTRUCTIONS ON INSIDE OF COVER." The following information shall be stenciled on the inside, front and rear of the cover:

PACKAGING AND SHIPPING INSTRUCTIONS

1. DEPOT BII CONTAINER MAY BE USED AS A SHIPPING BOX.
2. SECURELY BUNDLE LIKE ITEMS.
3. PACKAGE HARDWARE IN CLOTH BAGS.
4. GROUP LARGEST, HEAVIEST ITEMS IN BOTTOM OF BOX.
5. PLACE OTHER ITEMS IN VOID BETWEEN ABOVE ITEMS.
6. FOLD COVER - PLACE ON TOP OF ABOVE ITEMS.
7. IMMOBILIZE ALL ITEMS AND SECURE COVER.
8. SHIP TO (address to be furnished by contracting officer).

All stenciled characters are to be a minimum of 3/4 inch high using white enamel conforming to TT-E-529.

3.1.10.1.3 Depot BII box marking. The information "DO NOT DESTROY - USE FOR RETURN SHIPMENT OF VEHICLE CLOSURE KIT" shall be stenciled on the depot BII box in lettering a minimum of 3/4 inch high with a contrasting color of enamel conforming to TT-E-529.

3.2 Level B. Vehicles shall be processed in the same manner as specified for Level A, with the following exceptions:

3.2.1 Transmission, transfer assembly, control differential, and final drives. Transmission, transfer assembly, control differential, and final drives shall contain operational lubricant as specified on applicable drawings, specifications, or lubrication order, filled to operating level. If, however, these units contain lubricating oil conforming to Type I, Grade 10 or 30 of MIL-L-21260, an additional amount of the same oil shall be added to attain operating level. Operating lubricants shall not be mixed with MIL-L-21260 except in an emergency. DD Form 1397 shall be annotated to indicate grade of operational lubricant or preservative oil used.

3.2.2 Engine crankcase. Engine crankcase shall contain normal operational lubricant as specified in lubrication order, filled to operational level. DD Form 1397 shall be annotated to indicate grade of lubricant used.

3.2.3 Engine preservation. The engine shall require no preservation for Level B shipment and storage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:48Z
Check the source to verify that this is the current version before use.

3.2.4 Personnel heater and fuel pump. Personnel heater and fuel pump shall be in ready-to-use condition. Heater exhaust opening shall be closed with a plastic plug conforming to MIL-C-5501/7 (see figure 37). A warning tag, bearing the information "HEATER EXHAUST OPENINGS CLOSED, REMOVE PLUG BEFORE OPERATING" shall be attached to the heater controls.

3.2.5 Residual fuel. Unless otherwise specified (see 6.2), vehicle shall be shipped without draining residual fuel from the fuel tank.

3.2.6 Backrests and seats. Cushions of backrests and seats shall not be covered. If cushions are received packaged, they shall be stowed as received in the crew compartment.

3.2.7 Vehicle closure. Vehicle closure kits shall not be provided for Level B shipment and storage.

3.2.8 Tow hooks. Tow hooks shall be removed for overseas shipment only (see 3.1.9.10).

3.2.9 Vision block openings. Plugs conforming to PPP-C-1752, Type 1, Class 2, 2 inches thick, 8 1/4 + 1/8 - 0 inches long and 2 1/4 + 1/8 - 0 inches wide shall be installed in the vision block openings (see figure 37).

3.2.10 Engine compartment access panels. Engine compartment access panels in crew compartment shall not be removed.

3.2.11 Bilge pump outlets. Bilge pump outlets shall be closed with plastic plugs conforming to MIL-C-5501/7 (see figure 37). A warning tag, bearing the information "BILGE PUMP OUTLETS CLOSED PRIOR TO OPERATING BILGE PUMP, REMOVE PLUGS FROM OUTLETS" shall be secured to the bilge pump operating switch.

3.3 Materials. Materials shall be as specified herein and in referenced specifications and drawings. Material shall be free from all defects and imperfections that might affect the serviceability and appearance of the finished product (see 4.5.1 and 6.5).

3.4 Loading.

3.4.1 Loading flat cars. Loading of vehicles on open top railroad cars shall be in accordance with the applicable requirements of Section 1, General Rules Governing the Loading of Commodities on Open Top Cars, and Figure 87 or 87A, Section 6, Rules Governing the Loading of Department of Defense Material on Open Top Cars, publication of the Association of American Railroads.

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:48Z
Check the source to verify that this is the current version before use.

3.4.2 Highway shipment. Loading of vehicles for shipment by haulaway and rules for shipment by driveaway or towaway shall be in accordance with Interstate Commerce Commission publication "Federal Motor Carrier Safety Regulations", and applicable military publications.

3.4.3 Reprocessing engine after loading.

3.4.3.1 Level A. If engine is operated in connection with the moving of vehicle to loading area or during the loading itself, the engine shall be reprocessed as specified in 3.1.8.6 through 3.1.8.6.3 and 3.1.8.7 through 3.1.8.7.6, as applicable. Vehicle cover shall be rolled clear of engine intake and exhaust to provide air circulation and to prevent damage to cover. After reprocessing of engine, vehicle cover shall be replaced in its original position.

3.4.3.2 Level B. If engine is operated in connection with movement of vehicle for loading or unloading, there shall be no additional processing of engine.

3.5 Marking. In addition to any special marking required in the contract (see 6.2), vehicle shall be marked in accordance with MIL-STD-129.

3.5.1 Lifting points. The legend "LIFT HERE" with arrow pointing to the lifting eye shall be stenciled adjacent to each lifting eye using black ink conforming to TT-I-1795.

3.5.2 Preserved gasoline engine - Level A. Two red warning tags, bearing the legend "DO NOT OPERATE ENGINE UNTIL PROVISIONS OF TB ORD 392 HAVE BEEN COMPLIED WITH", shall be provided for each preserved gasoline engine. One tag each shall be attached securely to the preserved gasoline engine and the other shall be attached in a conspicuous location within the driver's compartment.

3.5.3 Preserved gasoline engine - Level B. The provisions of 3.5.2 do not apply.

3.6 Drive-on - drive-off capability. When vehicle is to be operated for loading or unloading, the following provisions shall apply.

3.6.1 Additional fuel. When specified (see 6.2), additional fuel shall be added, as required, to accomplish movement of vehicle.

3.6.2 Batteries and electrolyte. New batteries with electrolyte added and fully charged will be installed in the vehicle and battery cables properly connected.

4. QUALITY ASSURANCE PROVISIONS

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:48Z
Check the source to verify that this is the current version before use.

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Inspection records. Contractor shall maintain records of all inspections performed and such records shall be readily available for review by the Government representative.

4.2 One of the first ten production processed vehicles. One of the first ten production processed vehicles (see 3.1.1) shall be subjected to the inspection and tests specified in 4.5.

4.3 Production processed vehicles. Unless otherwise specified (see 6.2), all production processed vehicles shall be subjected to the inspection and tests specified in 4.5.2 through 4.5.2.3.

4.4 Rejection. Failure of one of the first ten, or any production processed vehicle to conform to the applicable requirements of this specification shall be cause for rejection of the vehicles by the Government. No vehicles shall be accepted until objective evidence that the contractor has corrected the condition causing the rejection has been provided to the Government.

4.5 Quality conformance inspection.

4.5.1 Materials. Except for materials that have been inspected by the Government at source, all materials to be used in processing of vehicles shall be inspected in accordance with the material specification; or certified inspection and laboratory test reports shall be provided which show that furnished materials conform to the applicable material specification (see 6.5). When materials are listed on a Qualified Products List, they shall be obtained from one of the approved sources indicated.

4.5.2 Processing. Except as otherwise specified herein, vehicle processing shall be inspected to determine conformance to this specification. Inspection of processing shall include all items specified in table I and 4.5.2.1 through 4.5.2.4.

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:48Z
Check the source to verify that this is the currentversion before use.

4.5.2.1 Cleaning. To determine conformance to 3.1.7.1, interior of vehicles shall be examined for cleanliness. One vehicle each day shall be tested for cleanliness in accordance with the applicable provisions of MIL-P-116. To determine conformance to 3.1.7.2, exterior of vehicle shall be examined for cleanliness. Surfaces on which tape is to be applied shall be examined for cleanliness before application.

4.5.2.2 Fuel tank. To determine conformance to 3.1.8.9, visual inspection of preservative application shall be accomplished to assure addition of the correct amount of oil, based upon a known amount of residual fuel.

4.5.2.3 Cooling system. To determine conformance to 3.1.8.4, one processed vehicle shall be selected at random from each day's production. The engine coolant shall be tested using a hydrometer-thermometer type tester, with a range of minus 60°F to plus 160°F, conforming to GG-T-250.

4.5.2.4 Engine. To determine conformance to 3.1.8.6.1 through 3.1.8.6.3 or 3.1.8.7.1 through 3.1.8.7.6, as applicable, interior of the engine from one of the first ten production processed vehicles shall be examined for surface coverage. Engine shall be disassembled to the extent necessary to permit visual examination of all surfaces within the combustion chamber. The combustion chamber is all surfaces within the cylinder from and including the surface of the head within the cylinder. All surfaces within the combustion chamber shall have a "wet" coating of preservative oil such as is obtained when the item is dipped or flushed with the oil. The processing method of the approved preserved engine shall be submitted in writing for use in processing engines in all subsequent production vehicles.

5. PACKAGING

This section is not applicable to this specification.

6. NOTES

6.1 Intended use. Vehicle processing covered by this specification is intended to protect the vehicles for storage outside of buildings, for immediate use shipment, and for domestic or overseas shipment, including carloading.

6.2 Ordering data. Procurement documents shall specify the following:

a. Title, number, and date of this specification.
b. Applicable level of processing (see 1.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:48Z
Check the source to verify that this is the current version before use.

c. If inspection of one of the first ten production processed vehicles is not required (see 3.1.1).
d. Applicable procedure for protection of cooling system (see 3.1.8.4).
e. If BII should be processed, packed or stored other than as specified (see 3.1.9.8).
f. If vehicle closure kit is not required (see 3.1.10.1).
g. If inspection and tests other than these specified are required (see 4.3).
h. If additional fuel shall be supplied (see 3.6.1)
i. If special marking is required (see 3.5).

6.3 Safety precautions. Caution should be exercised in handling carbon dioxide (CO_2) fire extinguisher cylinders. Cylinders should not be dropped, be permitted to strike each other, or be handled roughly. Extreme care should be exercised during the reinstallation operation to avoid tripping fire extinguisher control trigger (see 3.1.9.5).

6.4 Forms. A copy of the "Equipment Log Book" and all required forms (see 3.1.6) will be furnished to the contractor by the Government at least 30 days before shipment of the vehicles required by the contract delivery schedule.

6.5 Recycled materials. The use of recycled materials which meet the requirements of the applicable material specifications without jeopardizing the intended use of the item shall be encouraged (see 4.5.1).

6.6 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Custodian:
Army - AT

Preparing activity:
Army - AT

Project No. 2320-AA33

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:48Z
Check the source to verify that this is the current version before use.

TABLE I. Processing inspection.
(See indicated paragraphs for Level A, B requirements)

Component	Cleaning	Preservation		Packaging/Stowage	
	Levels A & B	Level A	Level B	Level A	Level B
Processing records				3.1.4	3.1.4
Disassembly				3.1.5	3.1.5
Matchmarking				3.1.5.1	3.1.5.1
Interior of vehicle	3.1.7.1				
Battery supports & retainers	3.1.7.1.1	3.1.8.2	3.1.8.2		
Backrests & seats	3.1.7.1.2			3.1.9.3	3.2.6
Exterior of vehicle	3.1.7.2				
Relubrication		3.1.8.1	3.1.8.1		
Transmission, transfer assembly, control differential, and final drives 1/		3.1.8.3	3.2.1		
Engine crankcase 1/		3.1.8.5	3.2.2		
Spark ignition engine		3.1.8.6	3.2.3		
Spark plugs				3.1.8.6.1	
Preservation thru fuel system and carburetor		3.1.8.6.2	3.2.3		
Preservation thru spark plug openings 1/		3.1.8.6.3	3.2.3		
Compression ignition engine		3.1.8.7	3.2.3		
Preservation thru fuel system and combustion chamber		3.1.8.7.1	3.2.3		
Engine purging		3.1.8.7.2	3.2.3		
Preservation thru air intake and exhaust system 1/		3.1.8.7.3	3.2.3	3.1.8.7.3	
Preservation thru oil level gage rod opening		3.1.8.7.4	3.2.3	3.1.8.7.4	

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:48Z
Check the source to verify that this is the current version before use.

TABLE I. Processing inspection. - Continued
(See indicated paragraphs for Level A, B requirements)

Component	Cleaning	Preservation		Packaging/Stowage	
	Levels A & B	Level A	Level B	Level A	Level B
Preservation thru flywheel housing		3.1.8.7.5			
Air cleaner		3.1.8.7.6	3.1.8.7.6		
Personnel & engine compartment heaters & lines		3.1.8.8	3.2.4		
Fuel tank		3.1.8.9	3.2.5		
Cooling system 1/		3.1.8.4	3.1.8.4		
Water & antifreeze procedure		3.1.8.4.1	3.1.8.4.1		
Arctic antifreeze procedure		3.1.8.4.3	3.1.8.4.3		
Water & corrosion inhibitor procedure		3.1.8.4.2	3.1.8.4.2		
Ramp winch assembly		3.1.8.10	3.1.8.10		
Ramp hydraulic reservoir		3.1.8.10.1	3.1.8.10.1		
Machine gun pintle mount		3.1.8.11	3.1.8.11		
Hatches & doors		3.1.8.12	3.1.8.12		
Ventilation & screen		3.1.8.13.1	3.1.8.13.1	3.1.9.9	3.1.9.9
Bipod cover				3.1.9.7	3.1.9.7
Engine compartment access panels				3.1.8.13.2	3.1.8.13.2
Mortar mount				3.1.9.6	3.1.9.6
Miscellaneous preservation		3.1.8.14	3.1.8.14		
Dry charged batteries & cables		3.1.9.1	3.1.9.1	3.1.9.1	3.1.9.1
Electrolyte				3.1.9.2	3.1.9.2
Periscopes				3.1.9.4	3.1.9.4
Fire extinguishers				3.1.9.5	3.1.9.5
Record forms				3.1.6	3.1.6
Tow hooks				3.1.9.10	3.2.8
Basic issue items				3.1.9.8	3.1.9.8
Strapping				3.1.9.8.1	3.1.9.8.1


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:48Z
Check the source to verify that this is the current version before use.

TABLE I. Processing inspection. - Continued.
(See indicated paragraphs for Level A, B requirements)

Component	Cleaning	Preservation		Packaging/Stowage	
	Levels A & B	Level A	Level B	Level A	Level B
Vehicle closure kit				3.1.10.1	3.2.7
Fuel tank security 1/				3.1.8.9.1	
Loading on flat cars				3.4.1	3.4.1
Highway shipment				3.4.2	3.4.2
Reprocessing engine after loading				3.4.3.1	3.4.3.2
Marking				3.5	3.5
Lifting points				3.5.1	3.5.1
Closure marking				3.1.10.1.1	
Closure disposition marking 1/				3.1.10.1.2	
Depot BII box marking				3.1.10.1.3	
Preserved gasoline engine				3.5.2	3.5.3

1/ Inspect DD Form 1397


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:48Z
Check the source to verify that this is the current version before use.

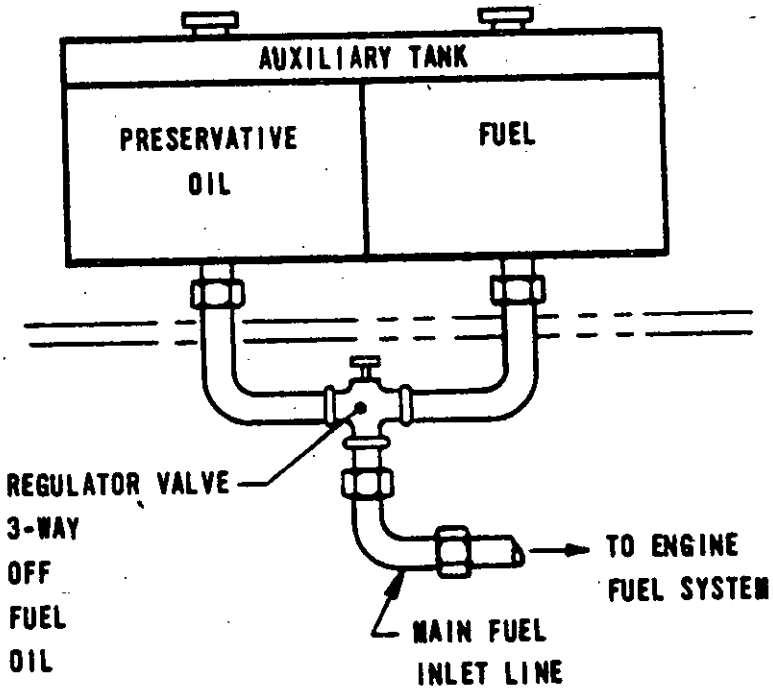

SHEET 1 OF 2

FIGURE 1. AUXILLIARY FUEL CONTAINER.


Source: https://assist.dla.mil -- Downloaded: 202610-22T02:48Z
Check the source to verify that this is the current version before use.

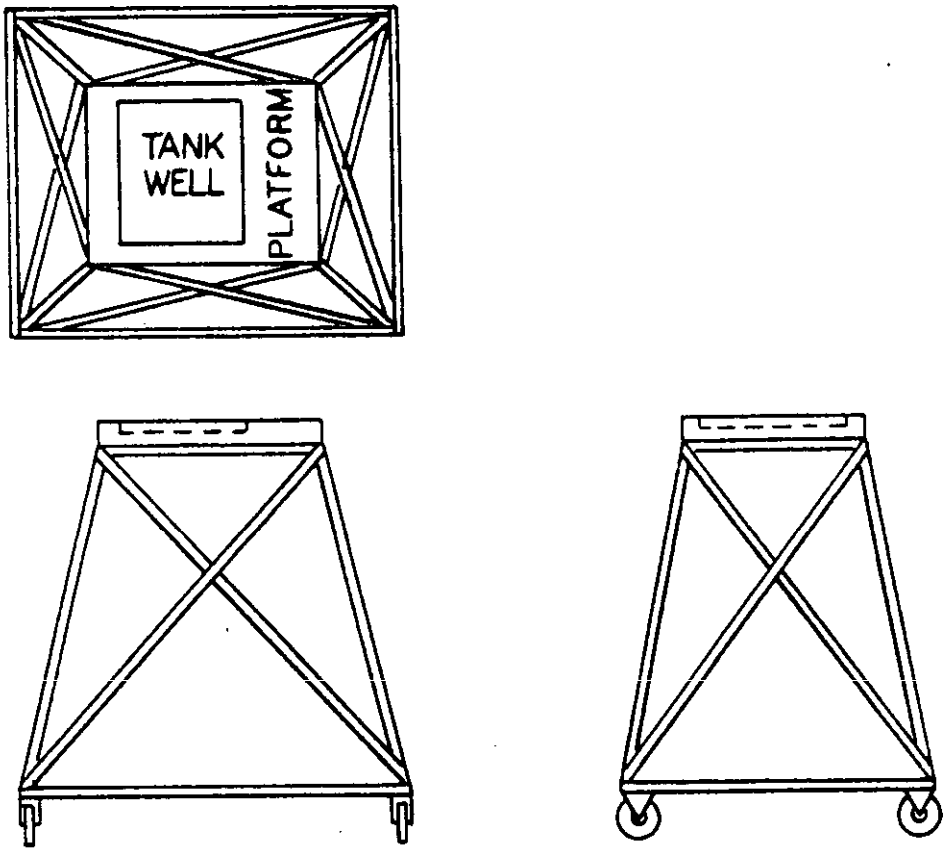

SHEET 2 OF 2

FIGURE 1. AUXILLIARY FUEL CONTAINER. - CONTINUED

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:48Z
Check the source to verify that this is the current version before use.

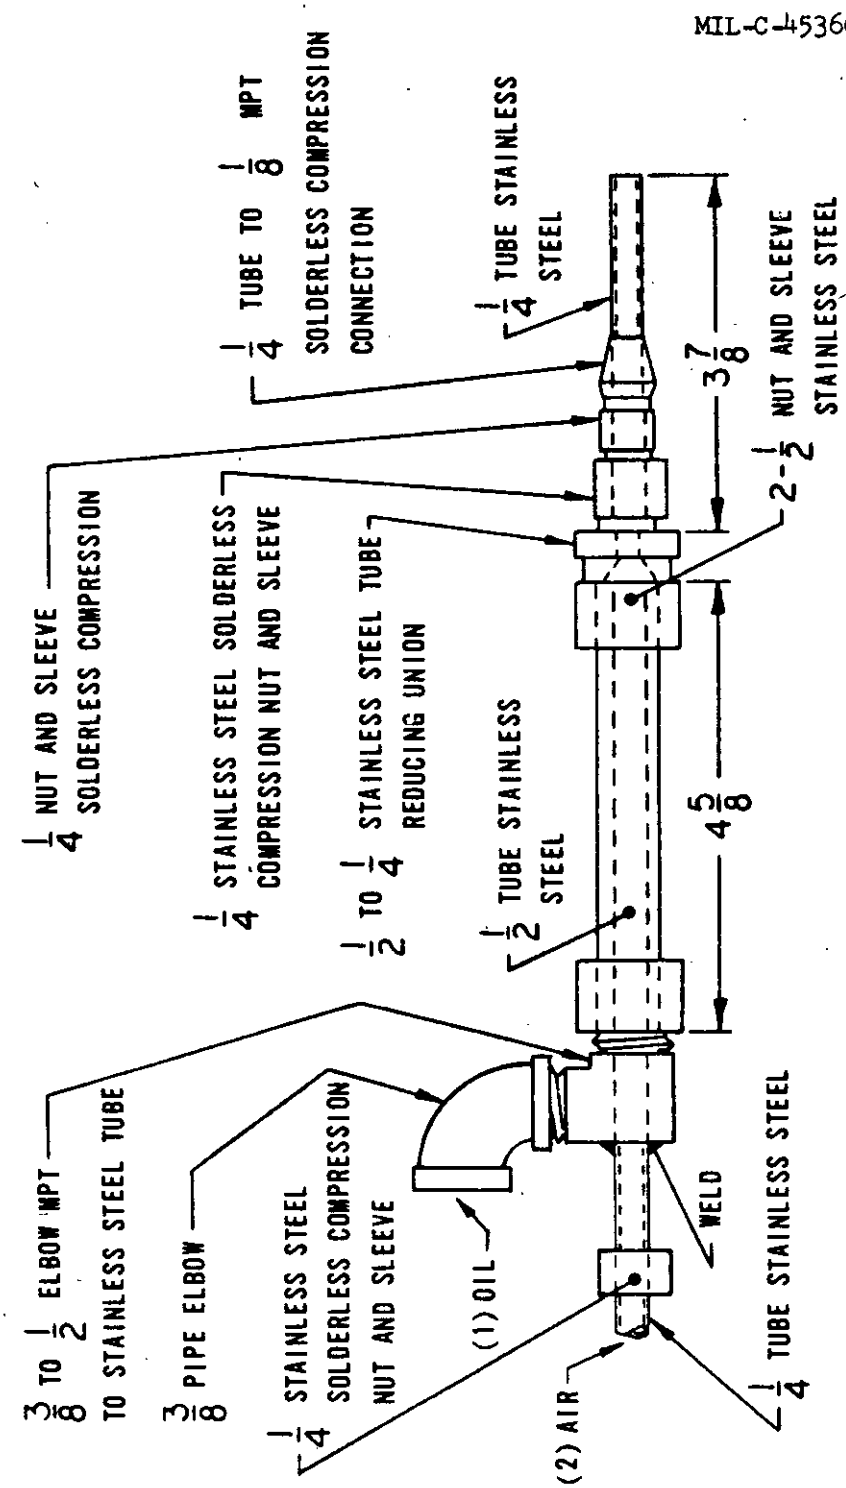


NOTE: (1) AND (2) CONNECT TO CORRESPONDING LINES ON FIGURE 3

FABRICATION DETAILS FOR OIL SPRAY ATOMIZING NOZZLE

FIGURE 2. ATOMIZING DEVICE.

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:48Z
Check the source to verify that this is the current version before use.

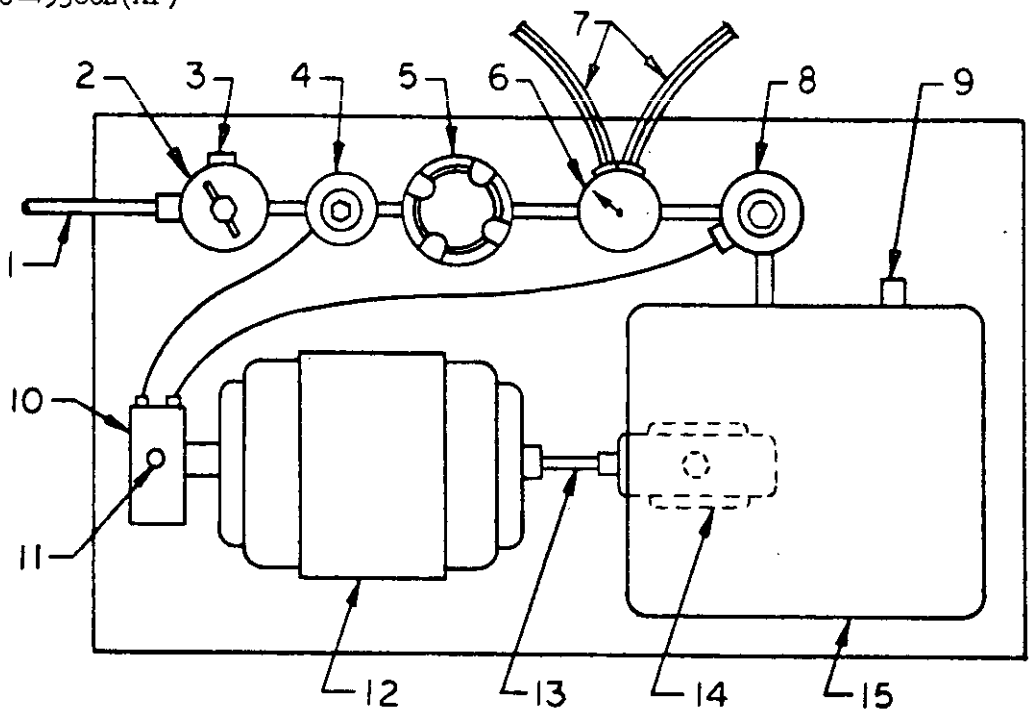

1. AIR LINE
2. AIR PRESSURE REGULATOR
3. AIR PRESSURE GAGE
4. SOLENOID VALVE
5. MOISTURE SEPARATOR
6. OIL PRESSURE GAGE
7. TWO DOUBLE TAPED LINES
8. SOLENOID VALVE
9. OIL TANK LEVEL GAGE
10. ELECTRIC JUNCTION BOX
11. ELECTRIC LINE
12. MOTOR 1/4 H P
13. SHAFT
14. POSITIVE DISPLACEMENT OIL PUMP
15. OIL TANK

NOTE:

THIS EQUIPMENT HAS PROVEN SATISFACTORY FOR ATOMIZED SPRAYING OF PRESERVATIVE OIL IN CONJUNCTION WITH FIGURE 2. .

FIGURE 3. PRESSURE PUMP.

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:48Z
Check the source to verify that this is the current version before use.



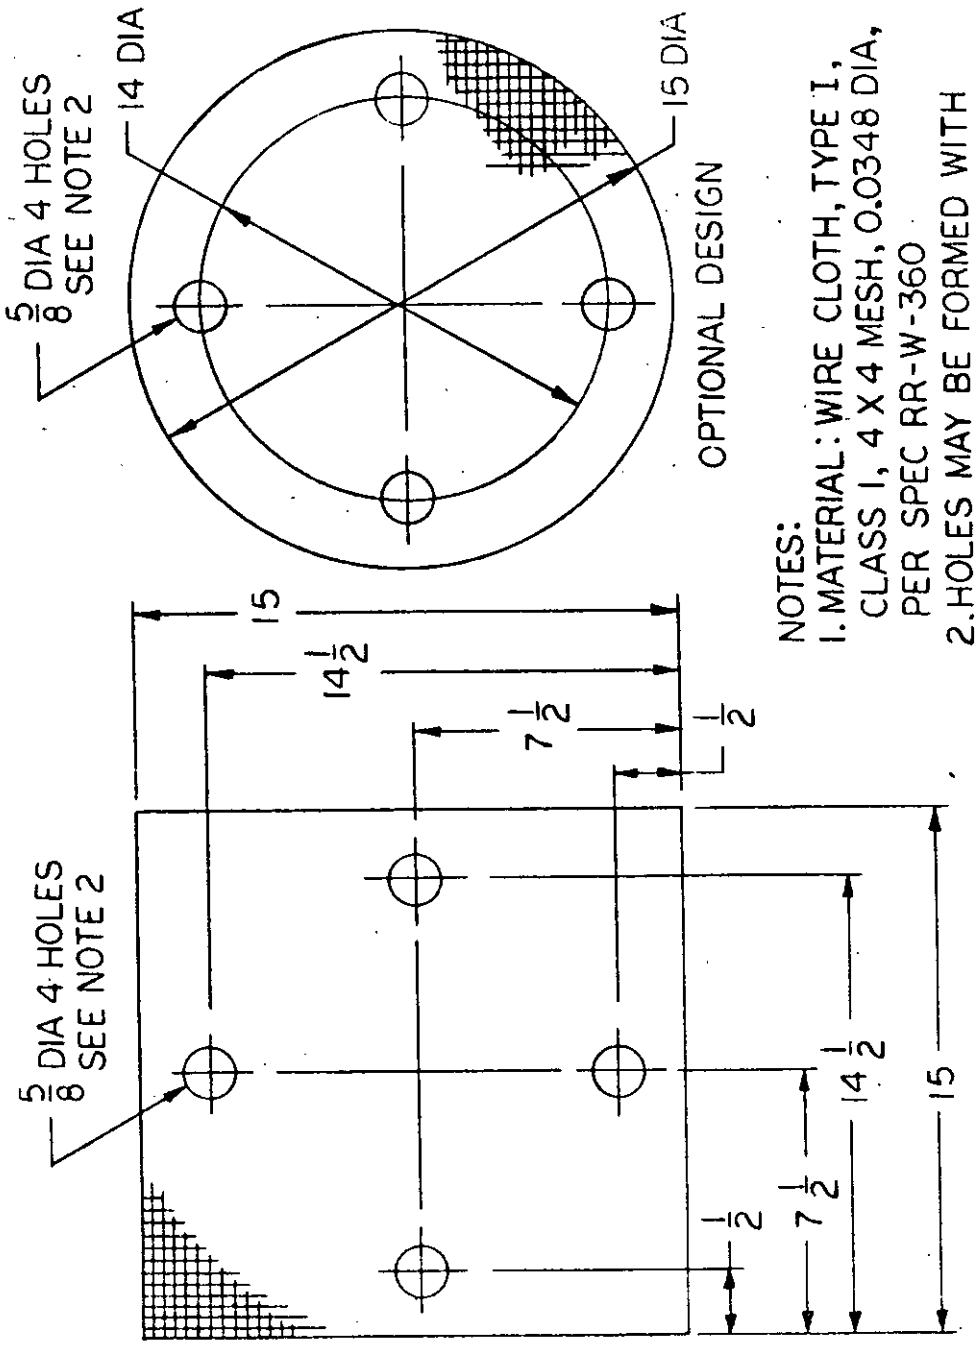


FIGURE 4. Screen.

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:48Z
Check the source to verify that this is the current version before use.

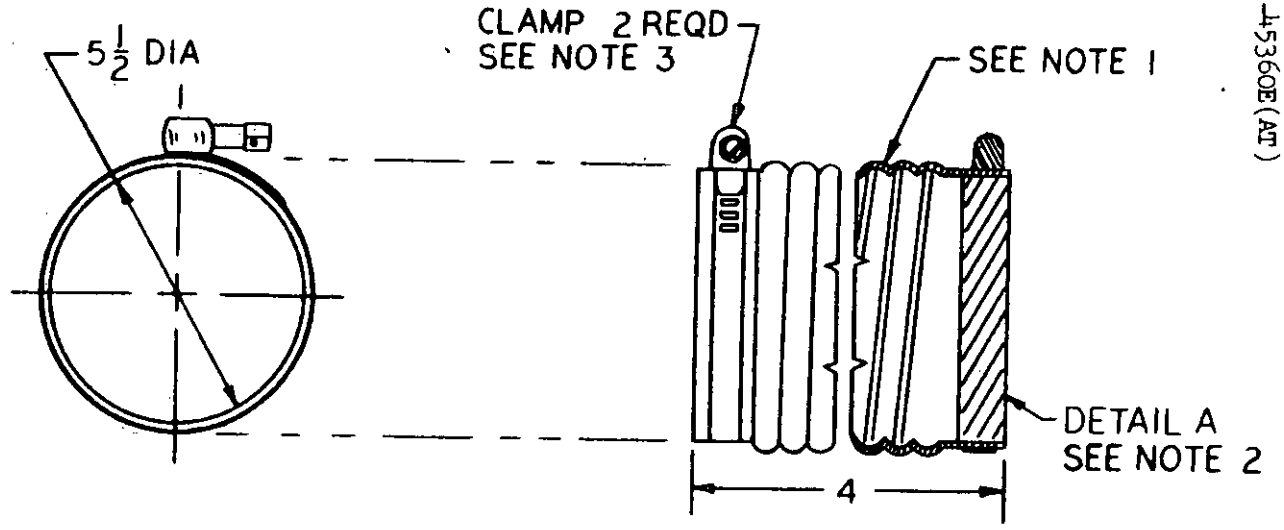

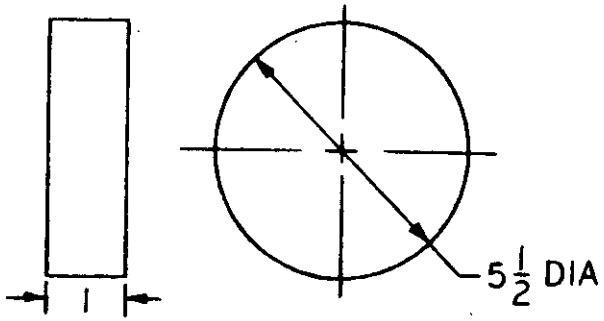

DETAIL A-1 REQD

NOTES:

1. HOSE FLEXIBLE TO BE MADE FROM MATERIAL CONFORMING TO MIL-H-52079 OR EQUIVALENT.
2. PLUG TO BE MADE FROM 1 INCH PLYWOOD, NN P 530, STD. INT. WITH EXT. GLUE.
3. USE MS35842-16 OR EQUIVALENT CLAMPS.

FIGURE 5. BOOT, AIR RESTRICTOR.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:48Z
Check the source to verify that this is the current version before use.

APPENDIX A

REQUIREMENTS FOR FABRICATING, ASSEMBLING, INSTALLING, REMOVING, DISASSEMBLING, AND PRESERVING, PACKAGING, AND PACKING VEHICLE CLOSURE FOR M106, M106A1, M113, M113A1, and M125A1 VEHICLES

10. SCOPE

10.1 Scope. This appendix covers the requirements for fabricating, assembling, installing, removing, and disassembling the vehicle closure and for preserving, packaging, and packing the disassembled vehicle closure for the M106, M113, A113A1, and M125A1.

20. APPLICABLE DOCUMENTS

20.1 Issues of documents. The following documents of the issue in effect on the date of invitation for bids or request for proposal, form a part of this appendix to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-T-285	- Thread, Polyester.
V-T-295	- Thread, Nylon.
QQ-A-200/4	- Aluminum Alloy Bar, Rod, Shapes, Tube and Wire, Extruded.
QQ-A-200/5	- Aluminum Alloy Bar, Rod, Shapes, Tube and Wire, Extruded.
QQ-A-200/8	- Aluminum Alloy Bar, Rod, Shapes, Tube and Wire, Extruded.
QQ-A-200/9	- Aluminum Alloy Bar, Rod, Shapes, Tube and Wire, Extruded.
QQ-A-225/8	- Aluminum Alloy Bar, Rod, Wire and Special Shapes, Rolled, Drawn, or Cold Finished.
QQ-B-613	- Brass, Leaded and Nonleaded, Flat Products (Plate, Bar, Sheet, and Strip).
QQ-P-416	- Plating, Cadmium (Electrodeposited).
QQ-S-634	- Steel, Bar, Carbon, Cold Finished (Standard Quality).
QQ-S-698	- Steel, Sheet and Strip, Low-carbon.
QQ-S-741	- Steel, Carbon: Structural Shape; Plate; and Bars.
QQ-T-830	- Tube, Steel, (Carbon, Mechanical; Seamless and Welded).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:48Z
Check the source to verify that this is the current version before use.

TT-C-490	- Cleaning Method and Pretreatment of Ferrous Surfaces and Organic Coatings.
TT-E-485	- Enamel, Semi-gloss, Rust-inhibiting.
TT-E-529	- Enamel, Alkyd, Semi-gloss.
TT-P-636	- Primer Coating, Alkyd, Wood and Ferrous Metal.
WW-T-700/4	- Tube, Aluminum Alloy, Round, Square, Rectangular, and other Shapes, Drawn, Seamless.
WW-T-700/5	- Tube, Aluminum Alloy, Drawn, Seamless.
WW-T-700/6	- Tube, Aluminum Alloy, Drawn, Seamless.
ZZ-T-351	- Tip, Cane and Crutch, Rubber.
MMM-A-189	- Adhesive, Synthetic Rubber, Thermoplastic, General Purpose.

MILITARY

MIL-F-495	- Finish, Chemical, Black, for Copper Alloys.
MIL-P-15328	- Primer (Wash), Pretreatment, Blue (Formula No. 117-B for Metals).
MIL-E-16053	- Electrodes, Welding, Bare, Aluminum Alloys.
MIL-P-20689	- Plastic, Plastisol (for Coating Metallic Objects).
MIL-C-20696	- Cloth, Coated, Nylon, Waterproof.
MIL-W-45205	- Welding, Gas, Metal-arc and Gas Tungsten-arc, Aluminum Alloys, Readily Weldable for Structures, Excluding Armor.

STANDARDS

FEDERAL

FED-STD-595	- Color.
FED-STD-751	- Stitch, Seam and Stitching.

MILITARY

MIL-STD-8	- Dimensioning and Tolerancing.
MIL-STD-100	- Engineering Drawing Practices.
MIL-STD-1261	- Welding Procedures for Constructional Steels.
MS21044	- Nut, Self-locking, Hexagon, Regular Height, 250°F, 125 Ksi Ftu and 60 Ksi Ftu.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:48Z
Check the source to verify that this is the current version before use.

MS21083 - Nut, Self-locking, Hexagon, Non-metallic Insert, Low Height, 250°F.
MS27183 - Washer, Flat-round, Steel, Cadmium Plated, General Purpose.
MS35207 - Screw, Machine-pan Head, Cadmium Plated.
MS51922 - Nut, Self-locking, Hexagon-prevailing Torque, General Purpose, 250°F, UNC-2B and UNF-2B.
MS90725 - Screw, Cap, Hexagon Head (Finished Hexagon Bolt), Medium Carbon Steel, Cadmium Plated, UNC-2A.
MS90726 - Screw, Cap, Hexagon Head (Finished Hexagon Bolt), Medium Carbon Steel, Cadmium Plated, UNF-2A.

DRAWINGS

ARMY

10917810 - Closure Kit.
10917814 - Frame Assembly.
10917732 - Frame Section, Front.
10917828 - Frame Section, Rear.
10917391 - Frame Section, Front Left.
10917392 - Frame Section, Front Right.
10917393 - Frame Section, Rear Left.
10917394 - Frame Section, Rear Right.
10917706 - Connector, Tube (Spacer).
10917849 - Bracket, Frame Closure.
10917396 - Plate, Frame (Connector).
10917850 - Connector, Frame Section.
10922144 - Fastener.
10917731 - Tubing Section, End, Top, (or Optional).
10917729 - Tubing Section, End, Top.
10917715 - Connector, Tube.
10917708 - Tube, Center, Top.
10917707 - Connector, Tube (Formed).
10917737 - Tube, Preformed (Aluminum).
10917812 - Cover, Closure Kit.
10917811 - Cover, Closure, Vehicle.
10890661 - Reinforcement Strip.
10917743 - Cover, Vent.
10917744 - Cover, Vent (Layout).
10890657 - Stiffener, Vent Cover.
10906339 - Tip, Cane and Crutch.
10917629 - Flap (Cover, Closure).
10917813 - Flap (Cover, Front, Closure).

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:48Z
Check the source to verify that this is the current version before use.

7392987	- Grommets.
7392993	- Washers.
10917799	- Flap, Corner Extension.
10917395	- Support, Frame.
10890663	- Rod, Metal.

PUBLICATIONS

PACKAGING DATA SHEET

10917810	- Closure Kit, Vehicle Protective.

30. REQUIREMENTS

30.1 Closure kit. The vehicle closure kit shall conform to drawing 10917810, and shall consist of a frame assembly No. 10917814 (figure 7) and a cover No. 10917812 (figure 24). After the frame assembly has been installed on the vehicle, the cover is attached to the frame.

30.2 Fabrication of frame. The frame assembly components, when permitted by optional material callouts on the drawings, may be either steel or aluminum. Steel parts in direct contact with aluminum must be painted to avoid electrolysis between dissimilar metals.

30.3 Attitude of fasteners. Except as otherwise specified in 30.4 or in the drawings, all fasteners in the frame assembly shall be installed with the threaded end pointing down or toward the center of the assembly.

30.4 Cover. The cover shall be fabricated in accordance with drawing 10917812 (figure 24).

30.4.1 Stitching. Optional stitching is polyester, Type I, Class 1, Sub-class B, olive drab No. 24087 (FED-STD-595) per V-T-285.

30.5 Assembly of frame. The frame may be assembled using appropriate jigs and fixtures. This is recommended especially for large production runs. If a jig or fixture is not used, the frame may be assembled as follows:

a. Form a subassembly by joining one front frame section 10917732-1 or 10917732-3 and one front frame section 10917732-2 or 10917732-4 (figure 8), using connector 10917850 (figure 17), 6 screws MS90725-8 and 6 nuts MS51922-1. See detail A, drawing 10917814 (figure 7).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:48Z
Check the source to verify that this is the current version before use.

b. Form a subassembly by joining one front right frame section 10917392 or 10917392-1 (figure 11) and one rear frame section 10917394 or 10917394-1 (figure 13) using connector 10917850 (figure 17), 6 screws MS90725-8 and 6 nuts MS51922-1. Lower 2 screws shall be positioned with threaded ends pointing out. See detail A, drawing 10917814 (figure 7).

c. Form a subassembly by joining one rear frame section 10917828-1 or 10917828-3 and one rear frame section 10917828-2 or 10917828-4 (figure 9), using connector 10917850 (figure 17), 6 screws MS90725-8 and 6 nuts MS51922-1. See detail A, drawing 10917814 (figure 7).

d. Form a subassembly by joining one front left frame section 10917391 or 10917391-1 (figure 10) and one rear left frame section 10917393 or 10917393-1 (figure 12) using connector 10917850 (figure 17), 6 screws MS90725-8 and 6 nuts MS51922-1. Lower 2 screws shall be positioned with threaded ends pointing out. See detail A, drawing 10917814 (figure 7).

e. Join together at the corners the four subassemblies formed in steps a. through d., using 4 connectors 10917706 (figure 14), 4 screws MS90726-68 and 4 nuts MS21044-6N6. Screws shall be positioned with the threaded ends pointing up. See section C-C, drawing 10917814 (figure 7).

f. Attach 4 brackets 10917849 (figure 15) to the inside of the side frame members using 4 connectors 10917706 (figure 14), 4 screws MS90726-68 and 4 nuts MS21044-6N6. Screws shall be positioned with the threaded ends pointing up. See section C-C and G-G, drawing 10917814 (figure 7).

g. Attach remaining 4 connectors 10917706 (figure 14) to the top of the side frame members between the brackets installed in step f. using 4 screws MS90726-68 and 4 nuts MS21044-6N6. Screws shall be positioned with the threaded ends pointing up. See section C-C, drawing 10917814 (figure 7).

h. Attach 4 plates 10917396 (figure 16) to the outside of side frame members using 16 screws MS90725-8 and 16 nuts MS51922-1. See section H-H and J-J, drawing 10917814 (figure 7). The screws at location of section J-J shall be positioned with the threaded ends pointed out.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:48Z
Check the source to verify that this is the current version before use.

i. Attach 20 fasteners 10922144 (figure 18) to the outside of the frame members using 20 screws MS35207-65 and 20 nuts MS21083-N3. See view F-F, drawing 10917814 (figure 7).

j. Form a ridge pole by joining the two top tubing sections 10917731 or 10917729 (figure 19) using connector 10917707-1 or 10917707-2 (figure 22), 2 screws MS90725-12 and 2 nuts MS51922-1. See detail B, drawing 10917814 (figure 7).

k. Attach 12 tubes 10917737-1 or 10917737-2 (figure 23) to the ridge pole formed in step j., using 12 screws MS90725-12 and 12 nuts MS51922-1. See view E-E, drawing 10917814 (figure 7).

l. Lift the completed bow section formed in step k. and slide the ends of the tubes over the connectors 10917706 on the frame assembly. See sections C-C and D-D, drawing 10917814 (figure 7). This completes the frame assembly. For ease of handling, this step may be accomplished after installing frame on vehicle per 30.6.

30.6 Installation of frame assembly on vehicle.

a. Lower the trim vane, raise and lock the ramp, and close all hatches and cupolas.

b. Lift the frame assembly and place on vehicle top so that slots in the rear frame members fit around the ramp skids.

c. Loosely attach 4 supports 10917395 (figure 35) to the four plates 10917396 on the frame assembly using 4 screws MS90725-62, 8 washers MS27183-14 and 4 nuts MS51922-17. See drawing 10917810, sheet 1 (figure 6).

d. Attach the lower ends of the supports installed in step c. to the track shroud by removing the 4 tack shroud bolts and washers that line up with the holes in the supports, placing 3 washers MS27183-18 between the track shroud angle and each support, and reinstalling the removed bolts and washers. See section A-A , drawing 10917810, sheet 2 (figure 6). Tighten the top support fasteners installed in step c.

e. If the bow assembly was not installed per step 30.5 (1), it shall now be installed.

Source: https://assist.dla.mil -- Downloaded: 202640-22T02:48Z
Check the source to verify that this is the currentversion before use.

30.7 Installation of cover.

a. Unfold the cover 10917812 (figure 24) and place over the bow assembly with the vent covers to the outside.

b. Fold up corner flaps on the cover and insert 10 rods 10890663 (figure 36) into flaps through the slots. Clamp rods in place with the 20 fasteners 10922144 (figure 18). Fold down corner flaps. See detail B, drawing 10917810, sheet 2 (figure 6).

c. Raise trim vane.

d. This completes the closure kit installation.

30.8 Removal and disassembly. The closure kit shall be removed from the vehicle and disassembled in accordance with 30.8.1 and 30.8.2.

30.8.1 Cover.

a. Lower trim vane.

b. Fold up cover flaps and release the 20 rod clamps.

c. Withdraw the 10 rods from the cover.

d. Remove cover from frame and bows.

30.8.2 Frame and bow assembly.

a. Lift bow assembly from frame.

b. Remove the 4 screws and 16 washers which attach the 4 frame supports to the track shrouds to disconnect the supports. Reinstall 4 screws and 4 washers in the track shroud.

c. Remove 4 screws and nuts and 8 washers to disconnect frame supports from frame.

d. Lift frame from vehicle.

e. Raise trim vane.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:48Z
Check the source to verify that this is the current version before use.

f. Disassemble frame and bow assembly by removing screws and nuts from all joints.

30.9 Preserving, packaging, and packing. The disassembled vehicle closure shall be preserved, packaged, and packed in accordance with Packaging Data Sheet 10917810.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:48Z
Check the source to verify that this is the current version before use.

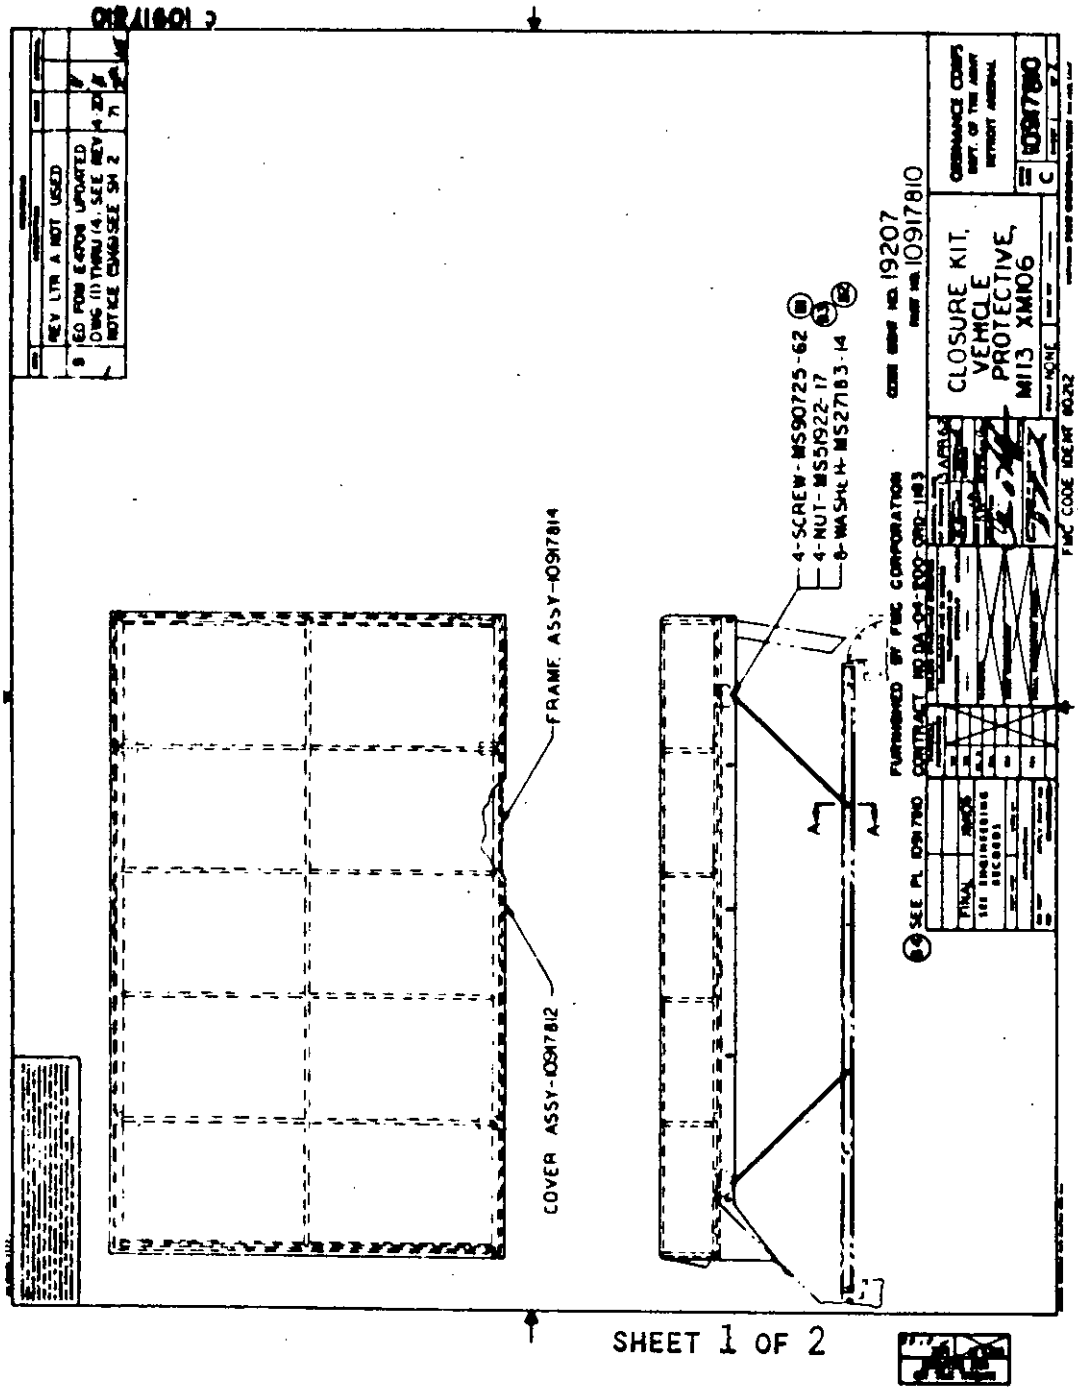


FIGURE 6. CLOSURE KIT, VEHICLE PROTECTIVE.

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:48Z
Check the source to verify that this is the current version before use.


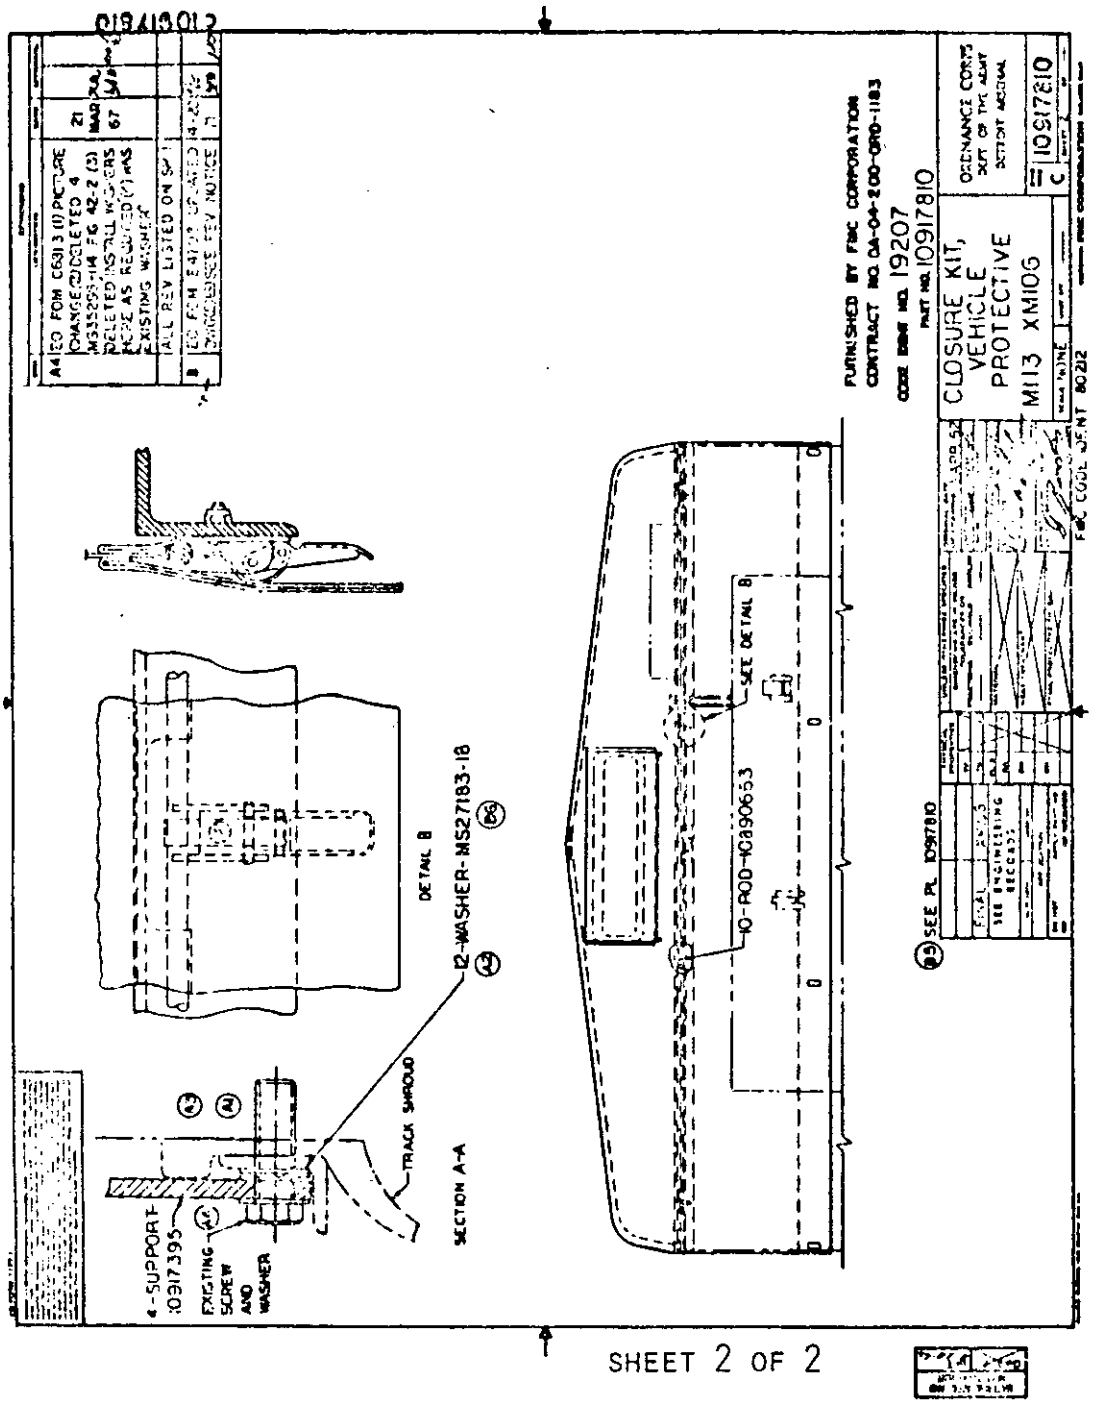


FIGURE 6. CLOSURE KIT, VEHICLE PROTECTIVE. - CONTINUED

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:48Z
Check the source to verify that this is the current version before use.

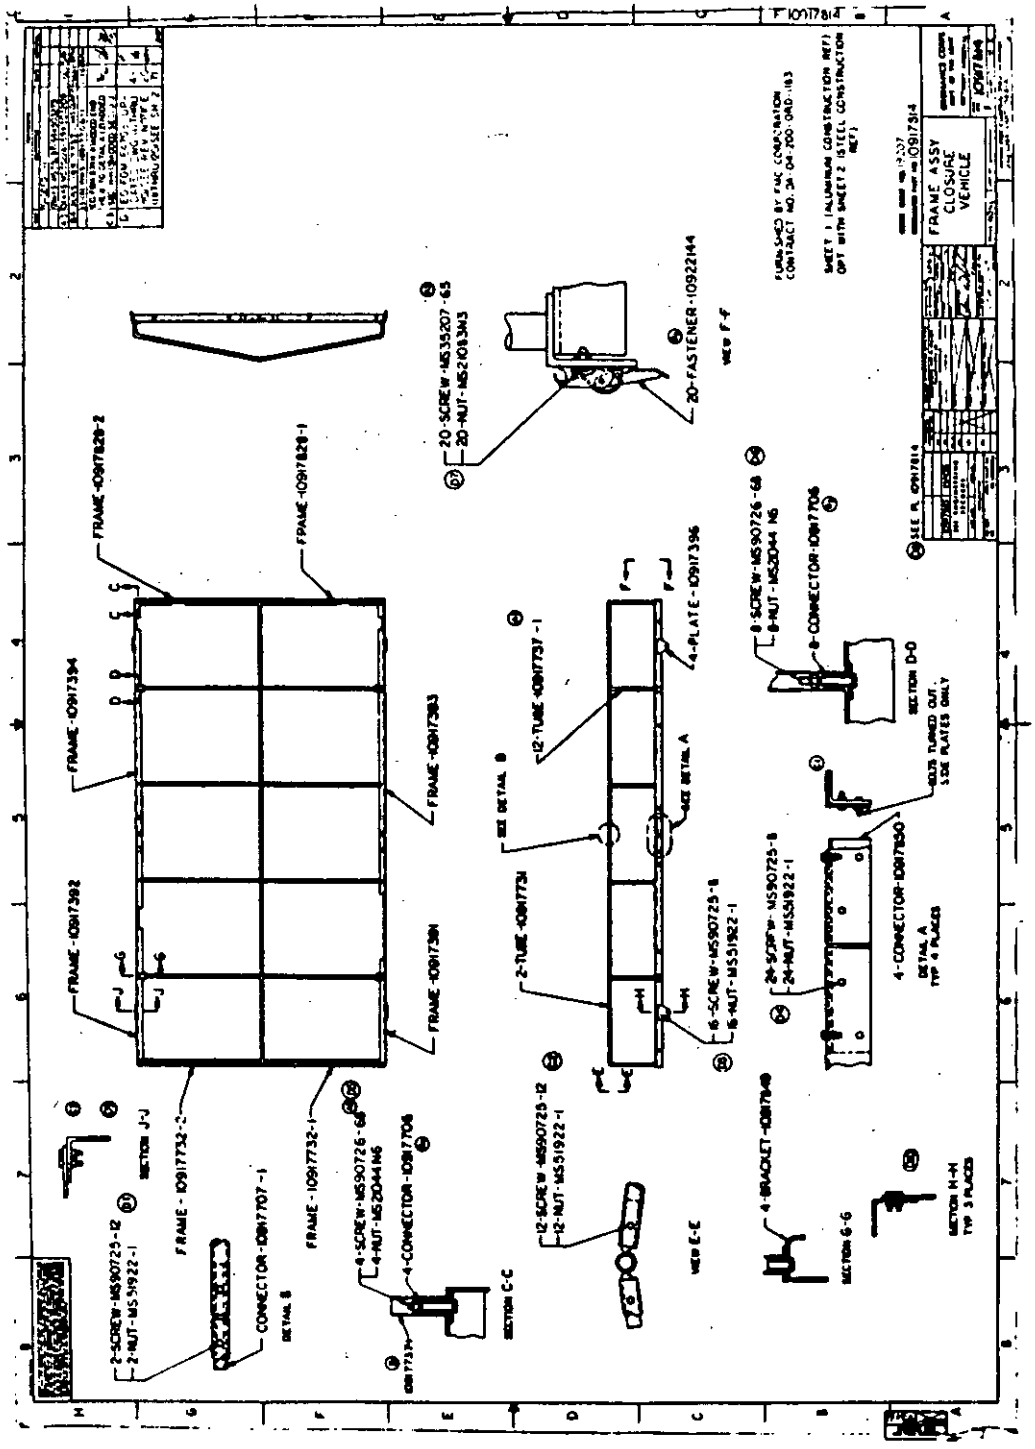

SHEET 1 OF 2

FIGURE 7. FRAME ASSY, CLOSURE, VEHICLE.

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:48Z
Check the source to verify that this is the current version before use.

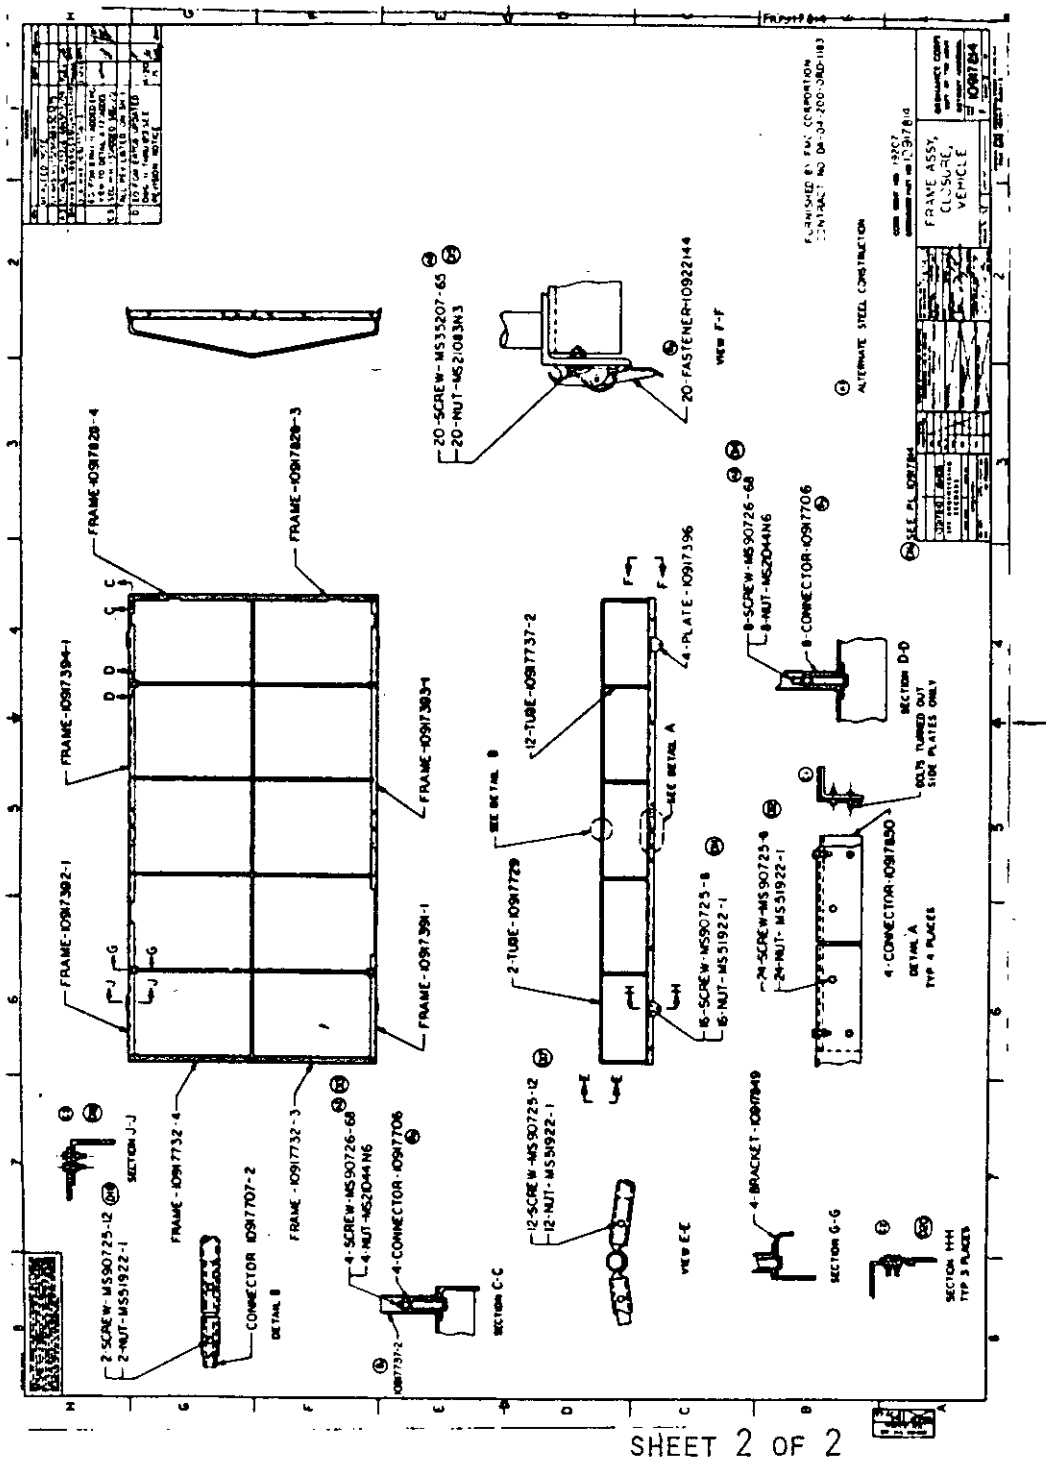


FIGURE 7. FRAME ASSY, CLOSURE, VEHICLE. - CONTINUED

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:48Z
Check the source to verify that this is the current version before use.

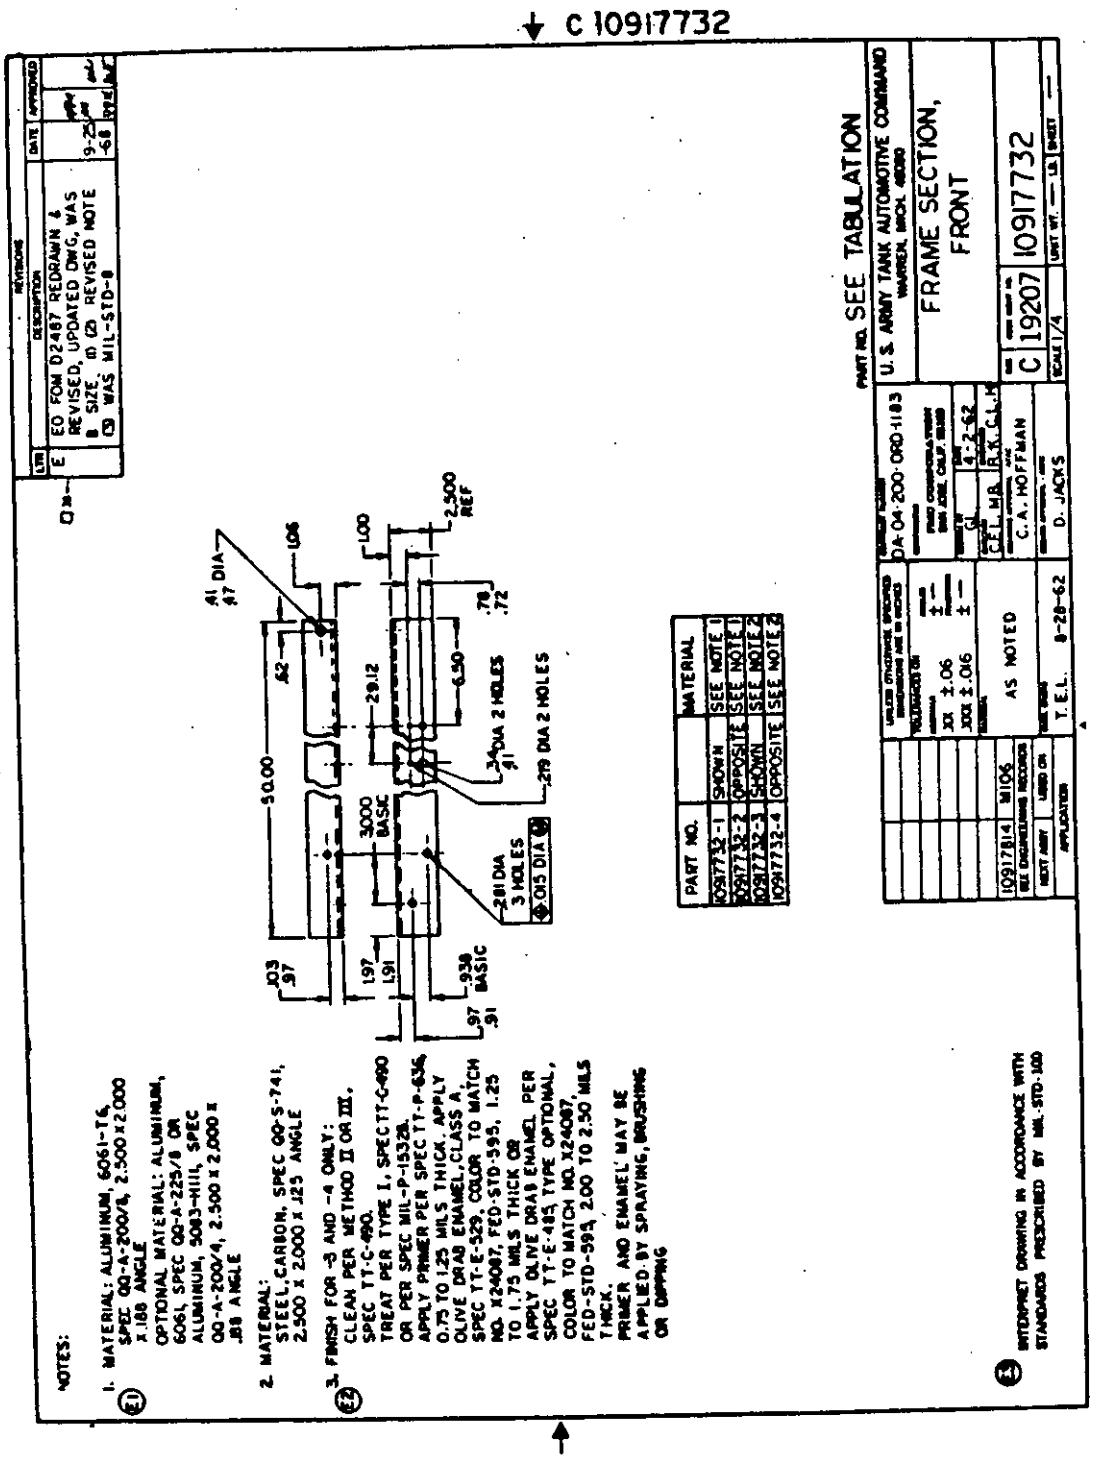


FIGURE 8. FRAME SECTION, FRONT.

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:48Z
Check the source to verify that this is the current version before use.

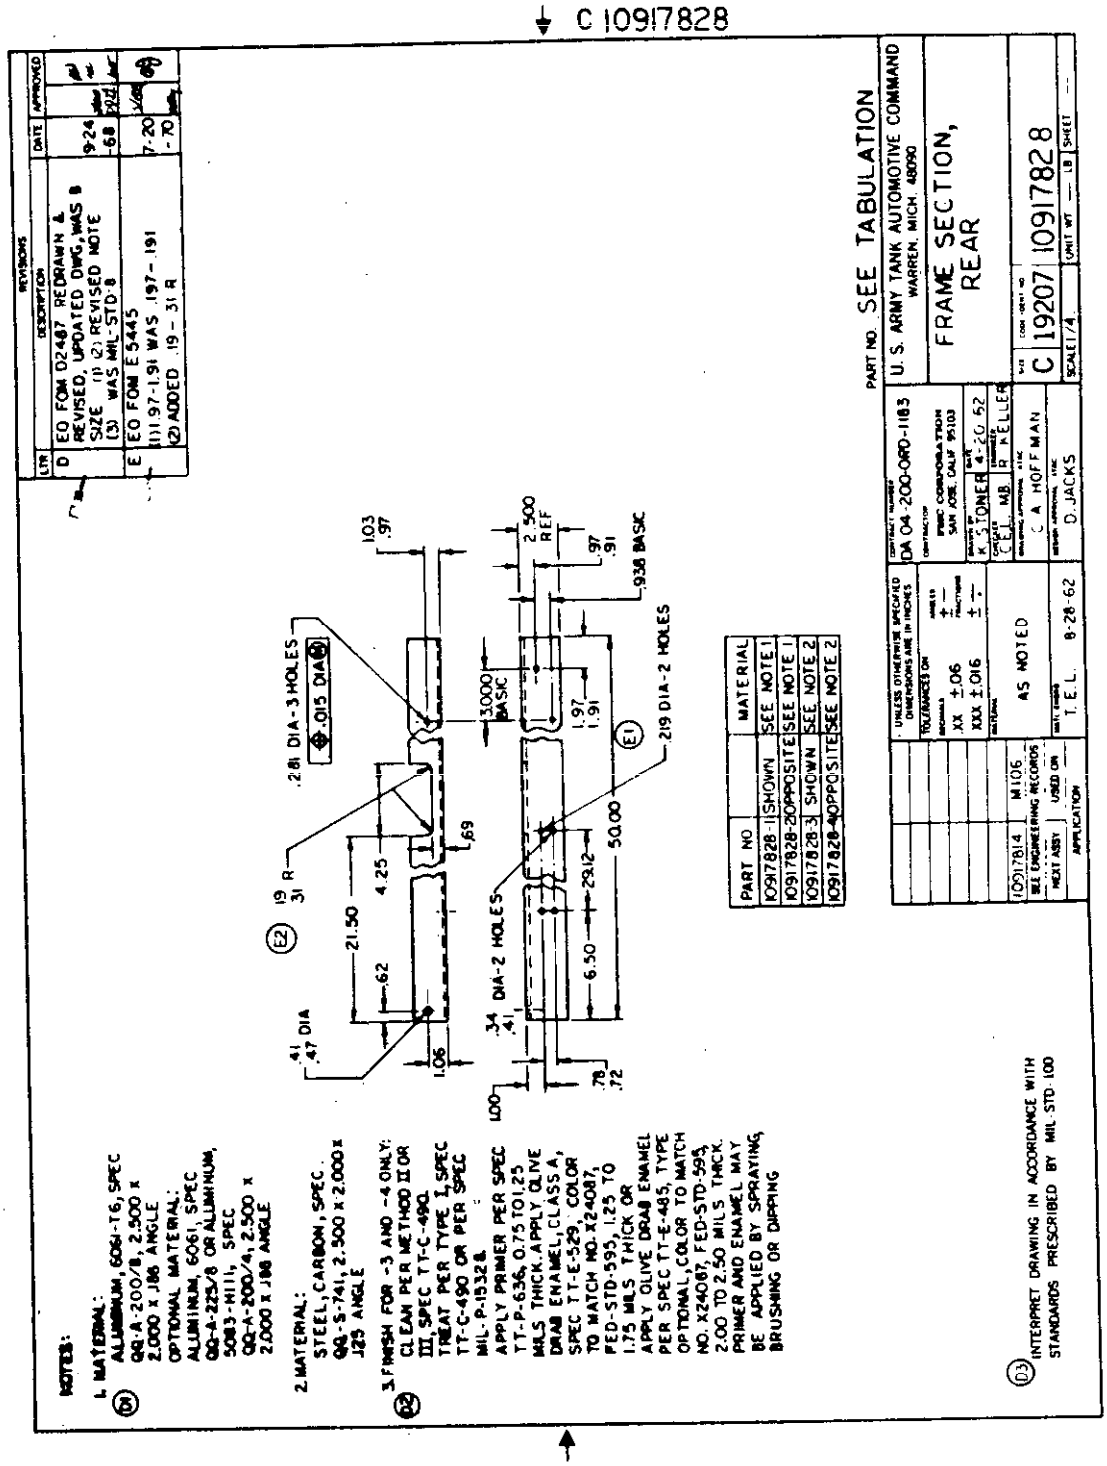


FIGURE 9. FRAME SECTION, REAR.

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:48Z
Check the source to verify that this is the current version before use.

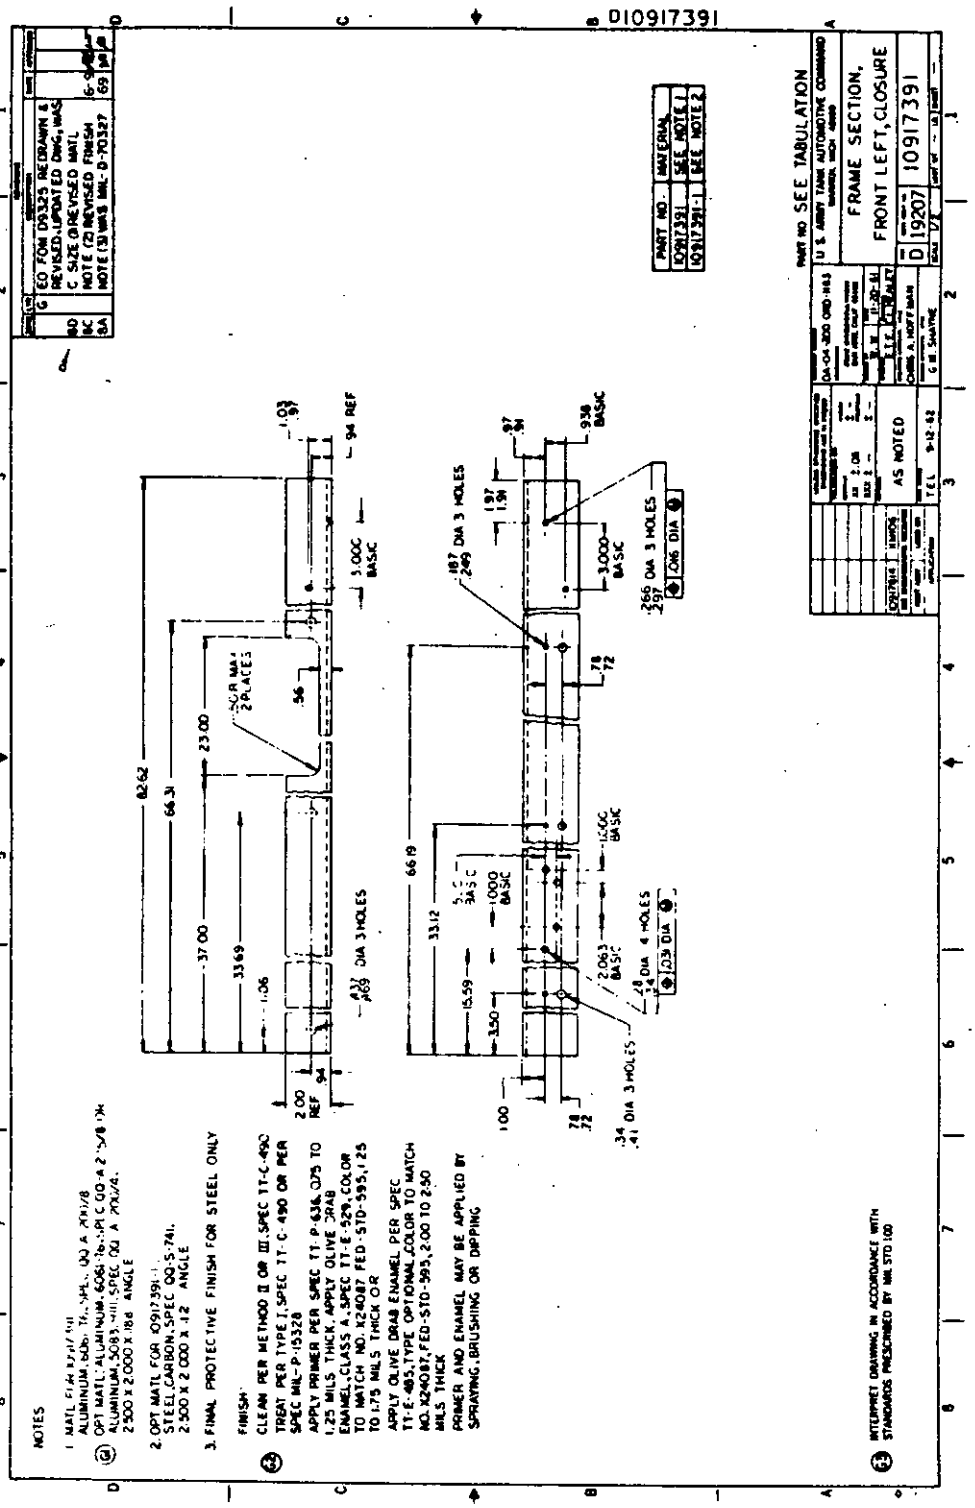


FIGURE 10. FRAME SECTION, FRONT LEFT, CLOSURE.

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:48Z
Check the source to verify that this is the current version before use.

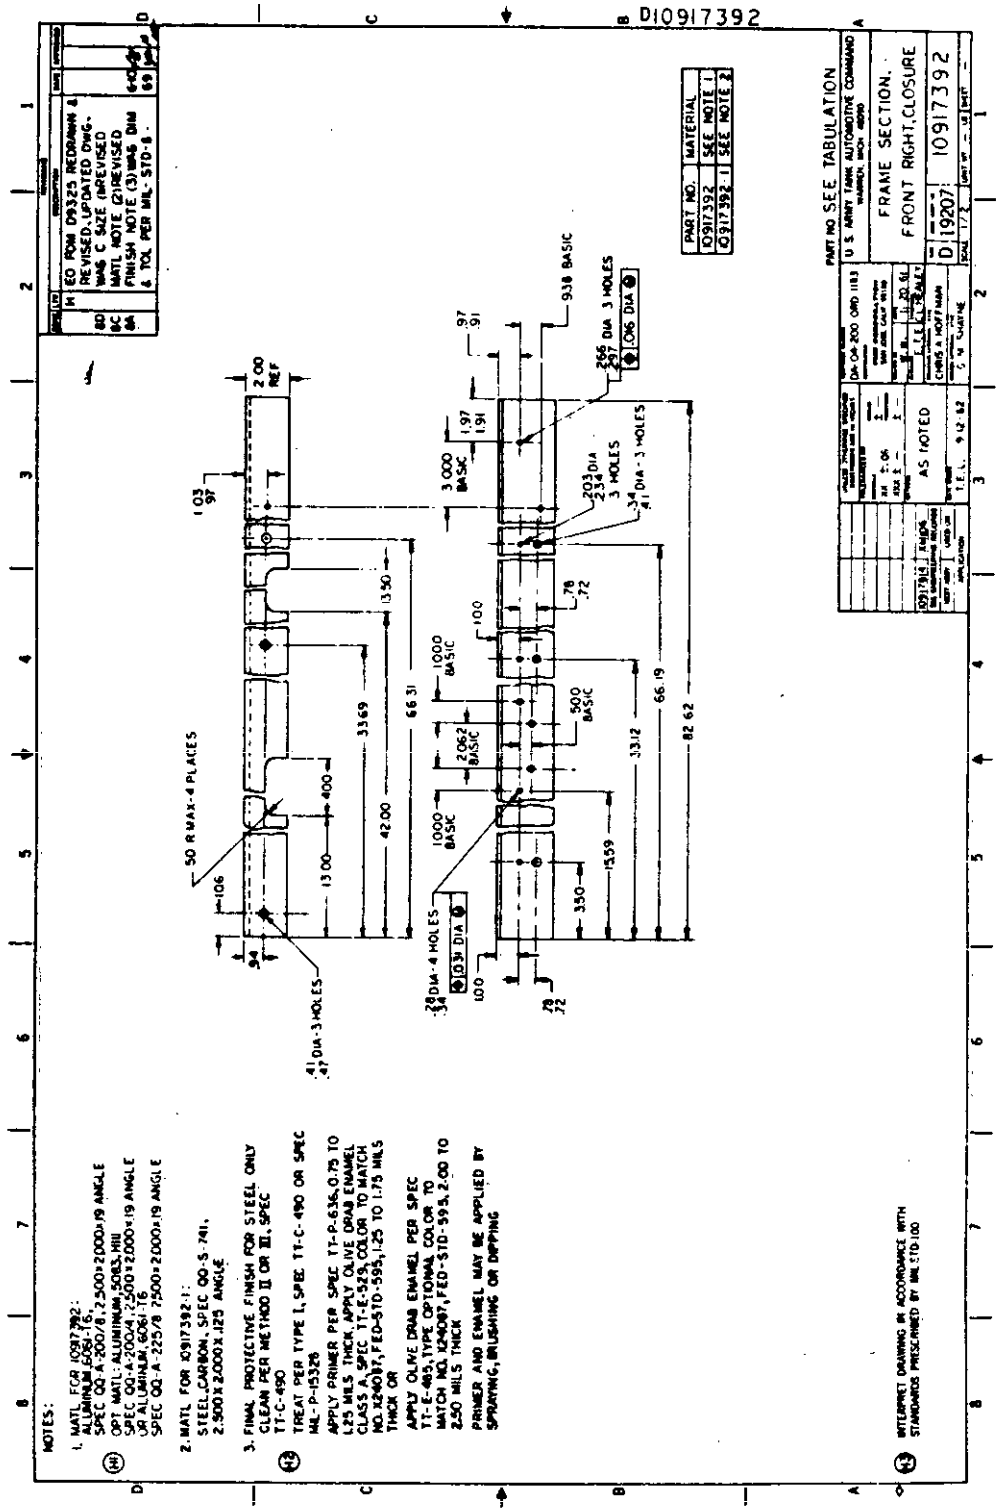


FIGURE 11. FRAME SECTION, FRONT RIGHT, CLOSURE.

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:48Z
Check the source to verify that this is the current version before use.

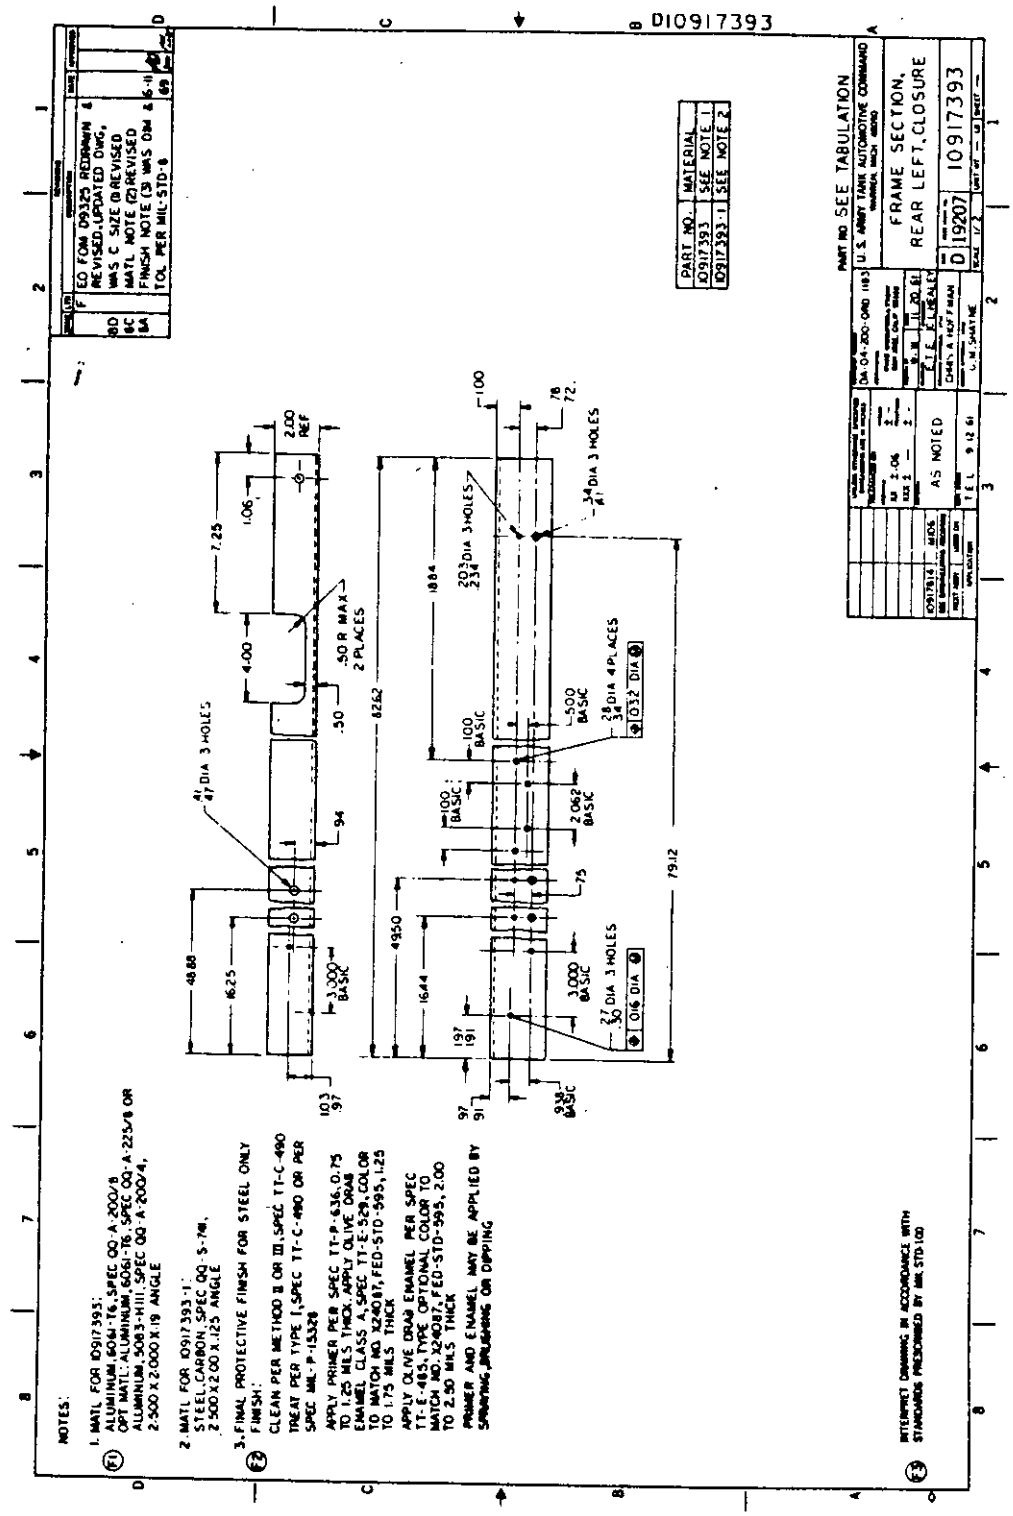


FIGURE 12. FRAME SECTION, REAR LEFT, CLOSURE.

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:48Z
Check the source to verify that this is the current version before use.

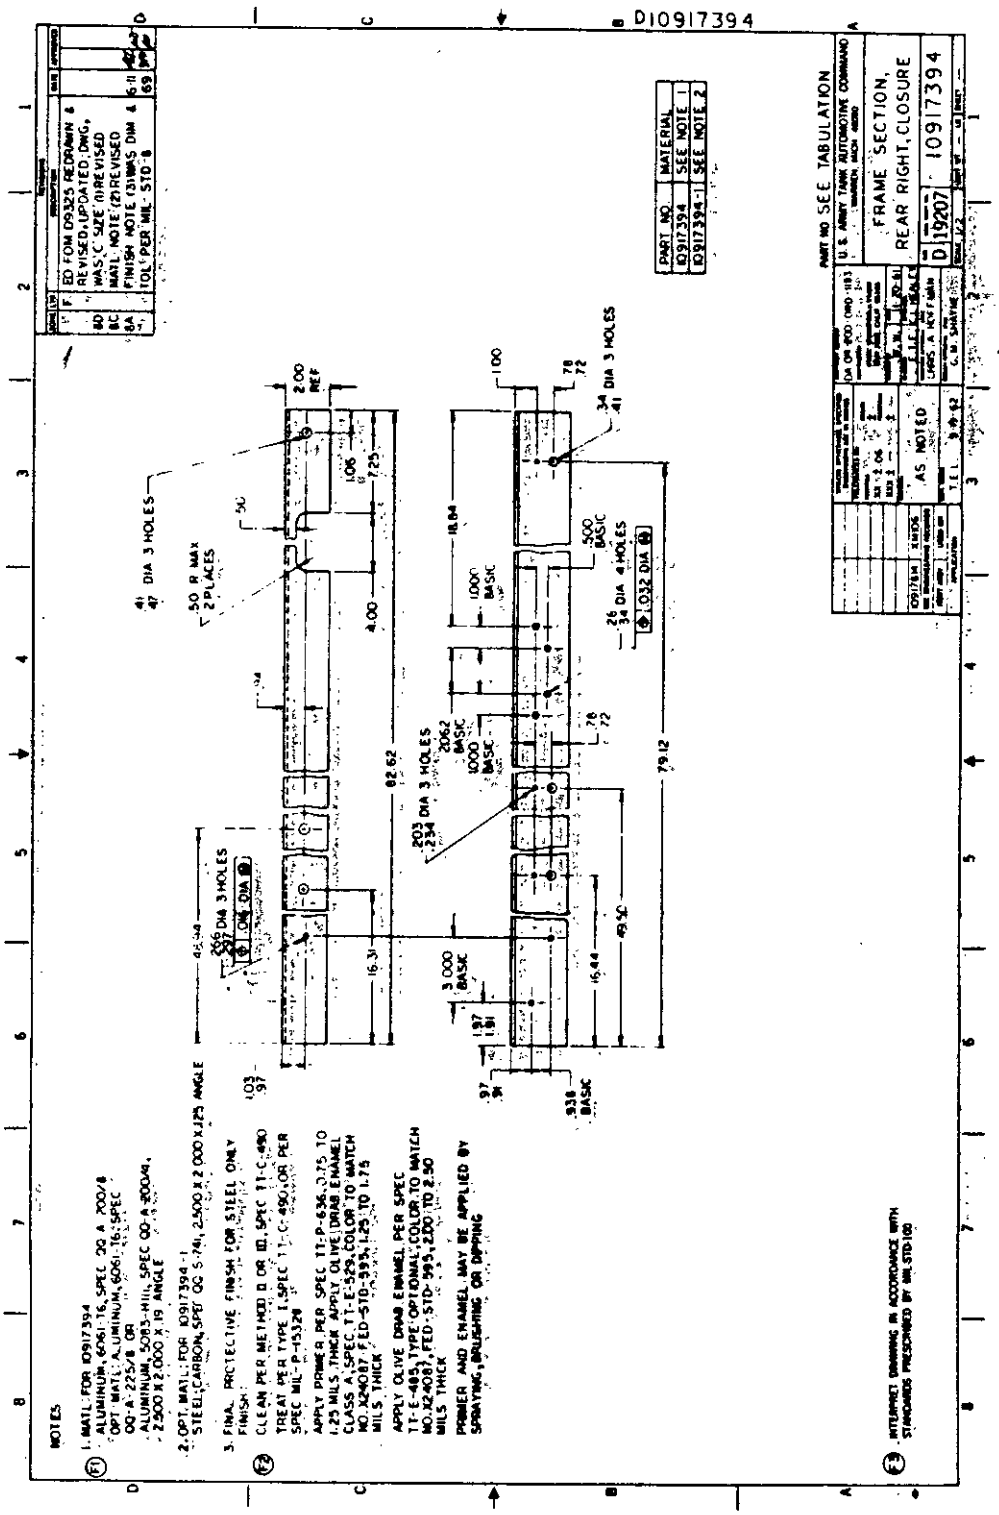


FIGURE 13. FRAME SECTION, REAR RIGHT CLOSURE.

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:48Z
Check the source to verify that this is the current version before use.

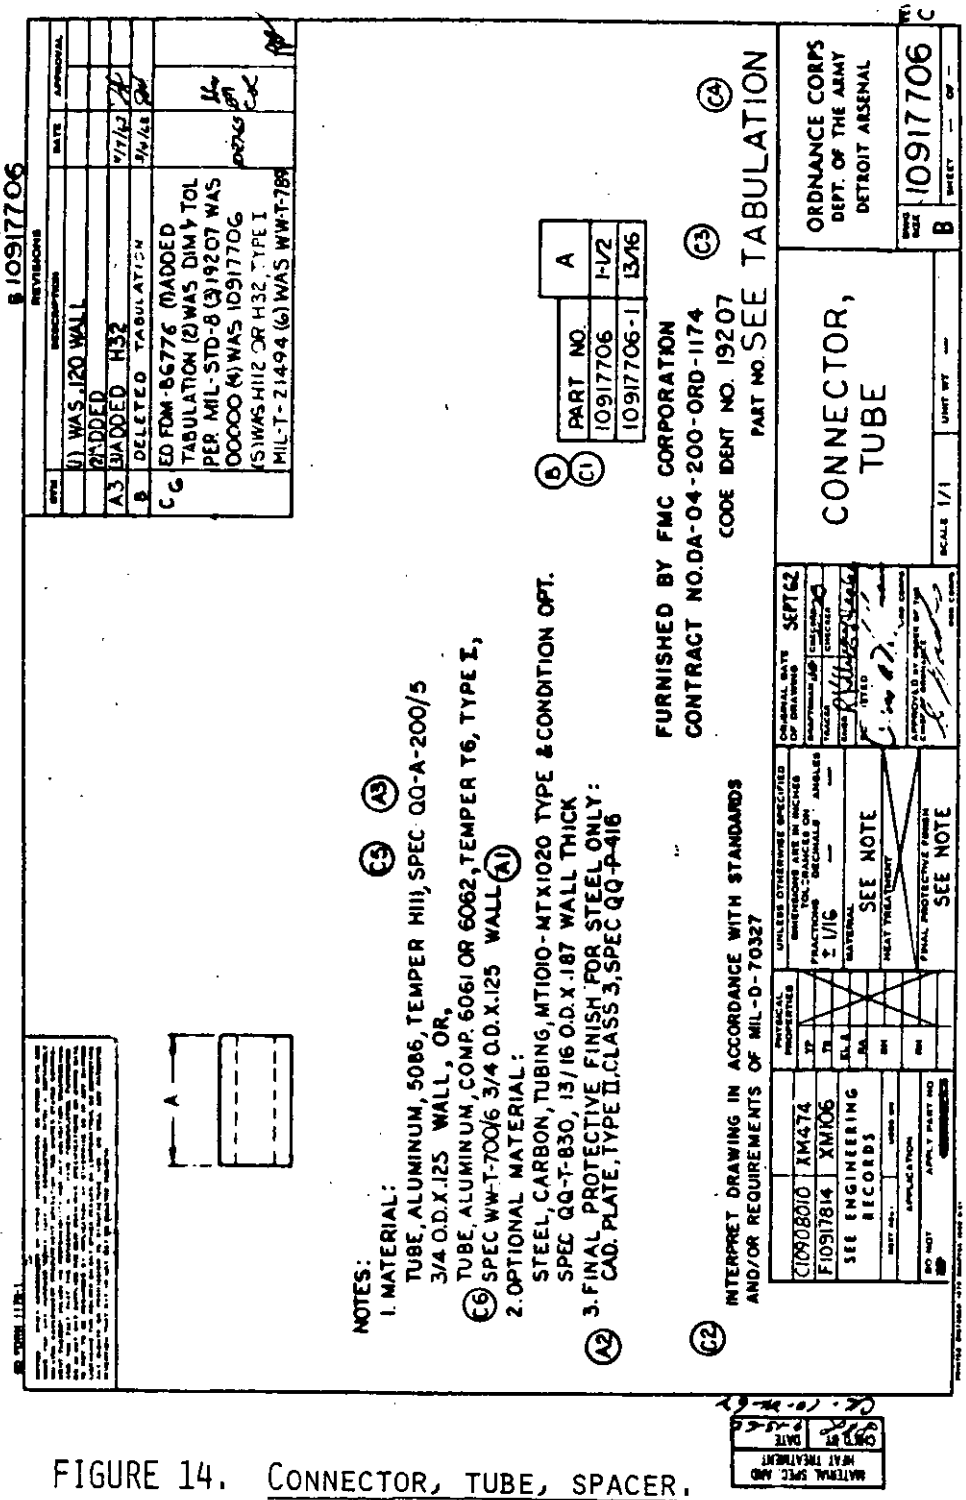


FIGURE 14. CONNECTOR, TUBE, SPACER.

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:48Z
Check the source to verify that this is the current version before use.

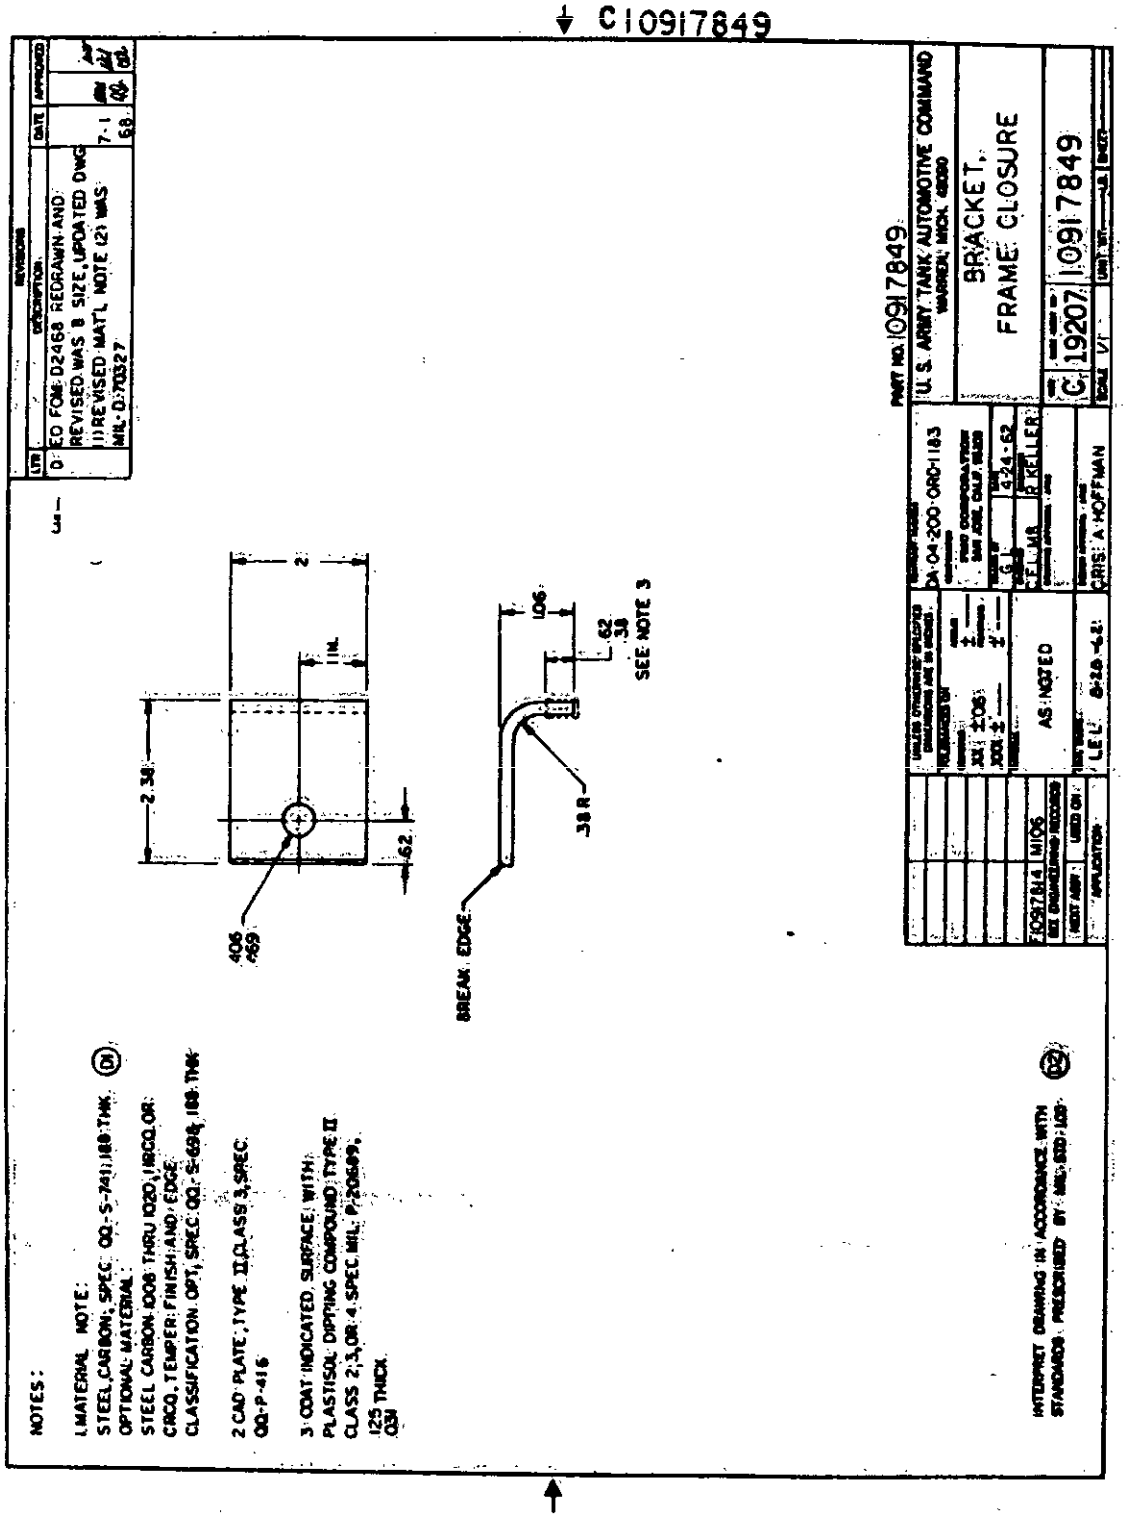


FIGURE 15. BRACKET, FRAME CLOSURE.

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:48Z
Check the source to verify that this is the current version before use.

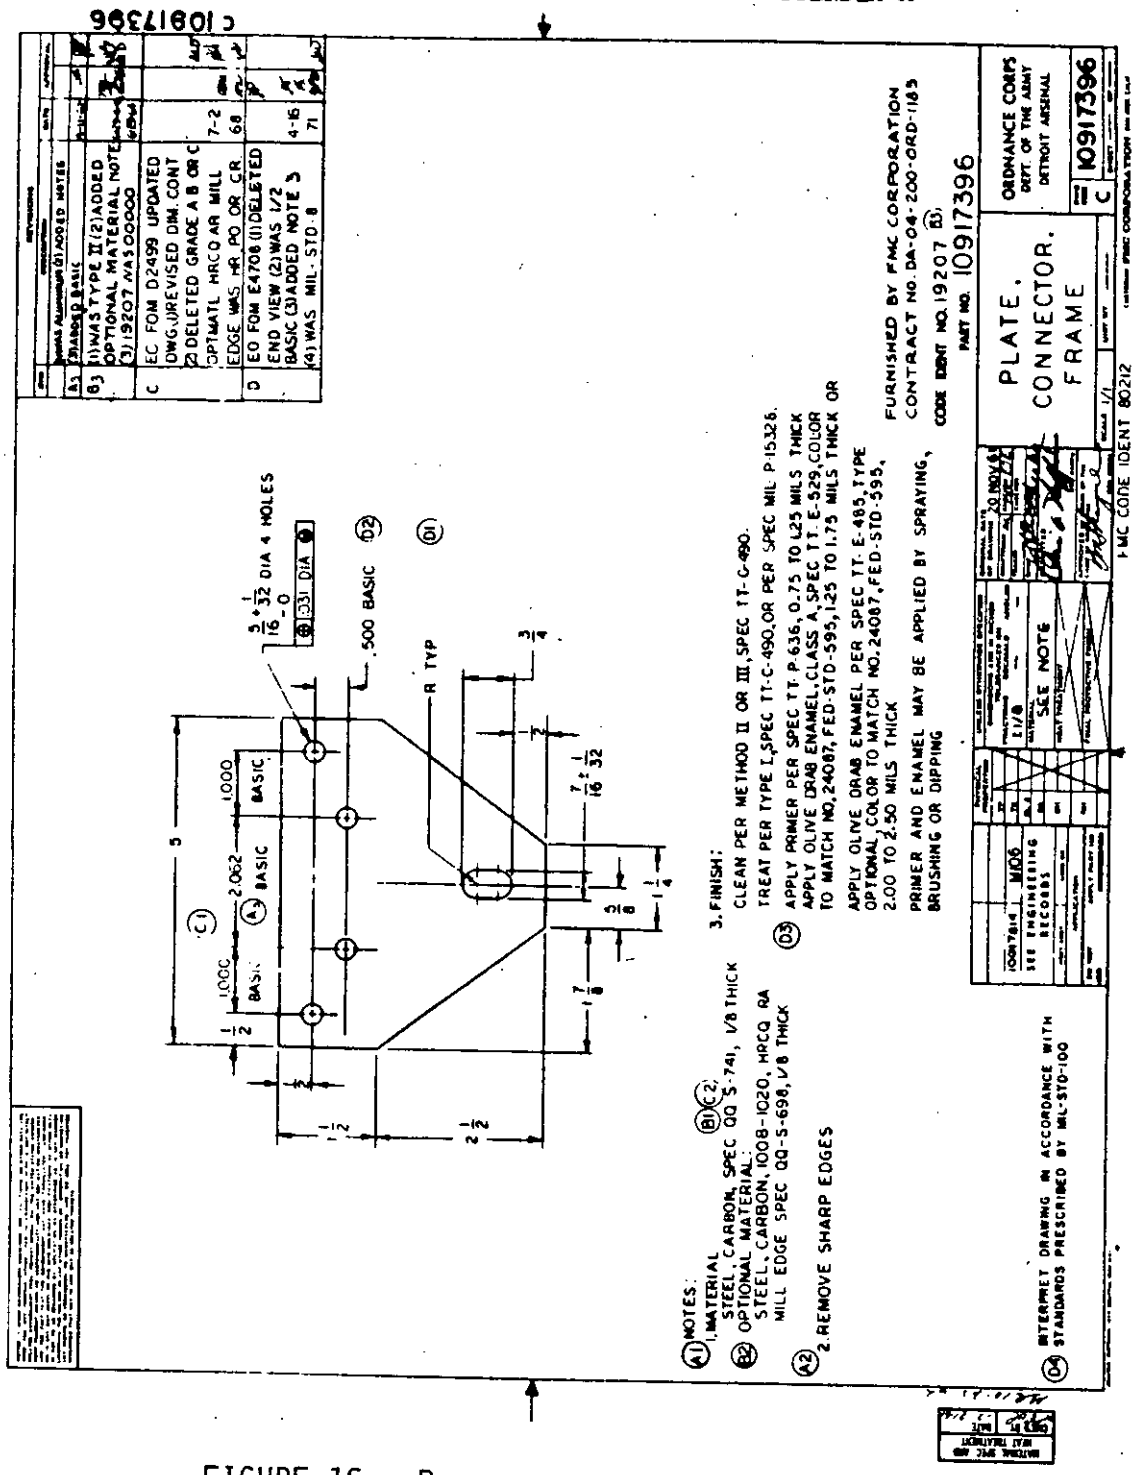


FIGURE 16. PLATE, CONNECTOR, FRAME.

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:48Z
Check the source to verify that this is the current version before use.

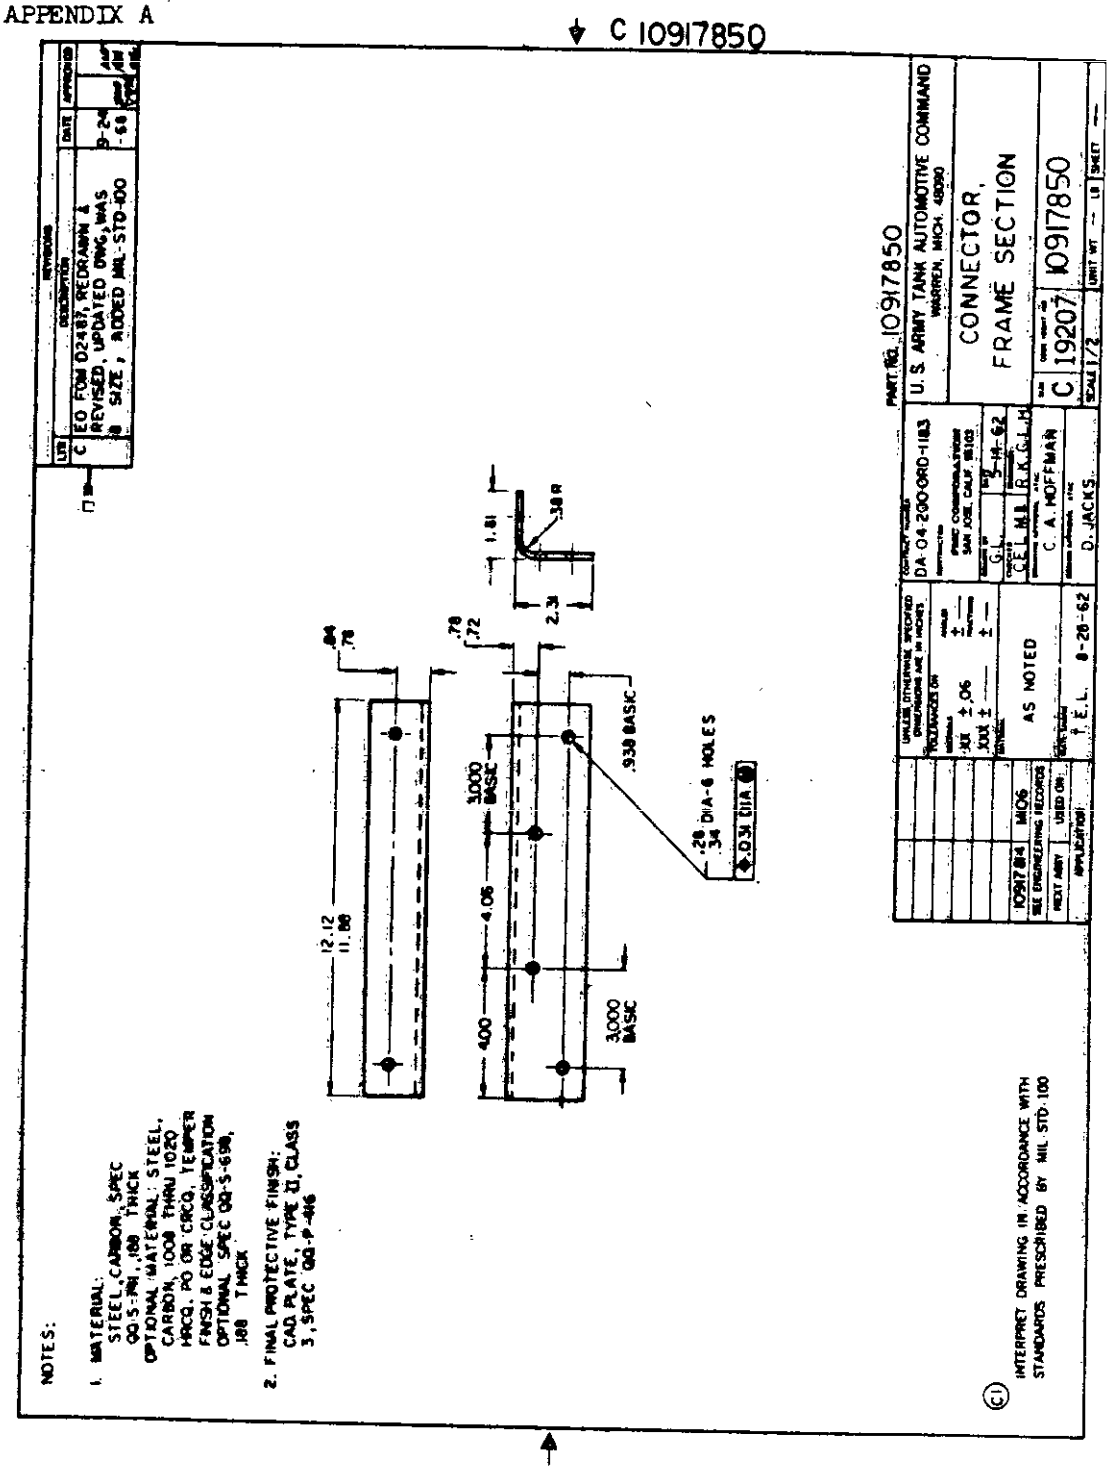


FIGURE 17. CONNECTOR, FRAME SECTION.

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:48Z
Check the source to verify that this is the current version before use.

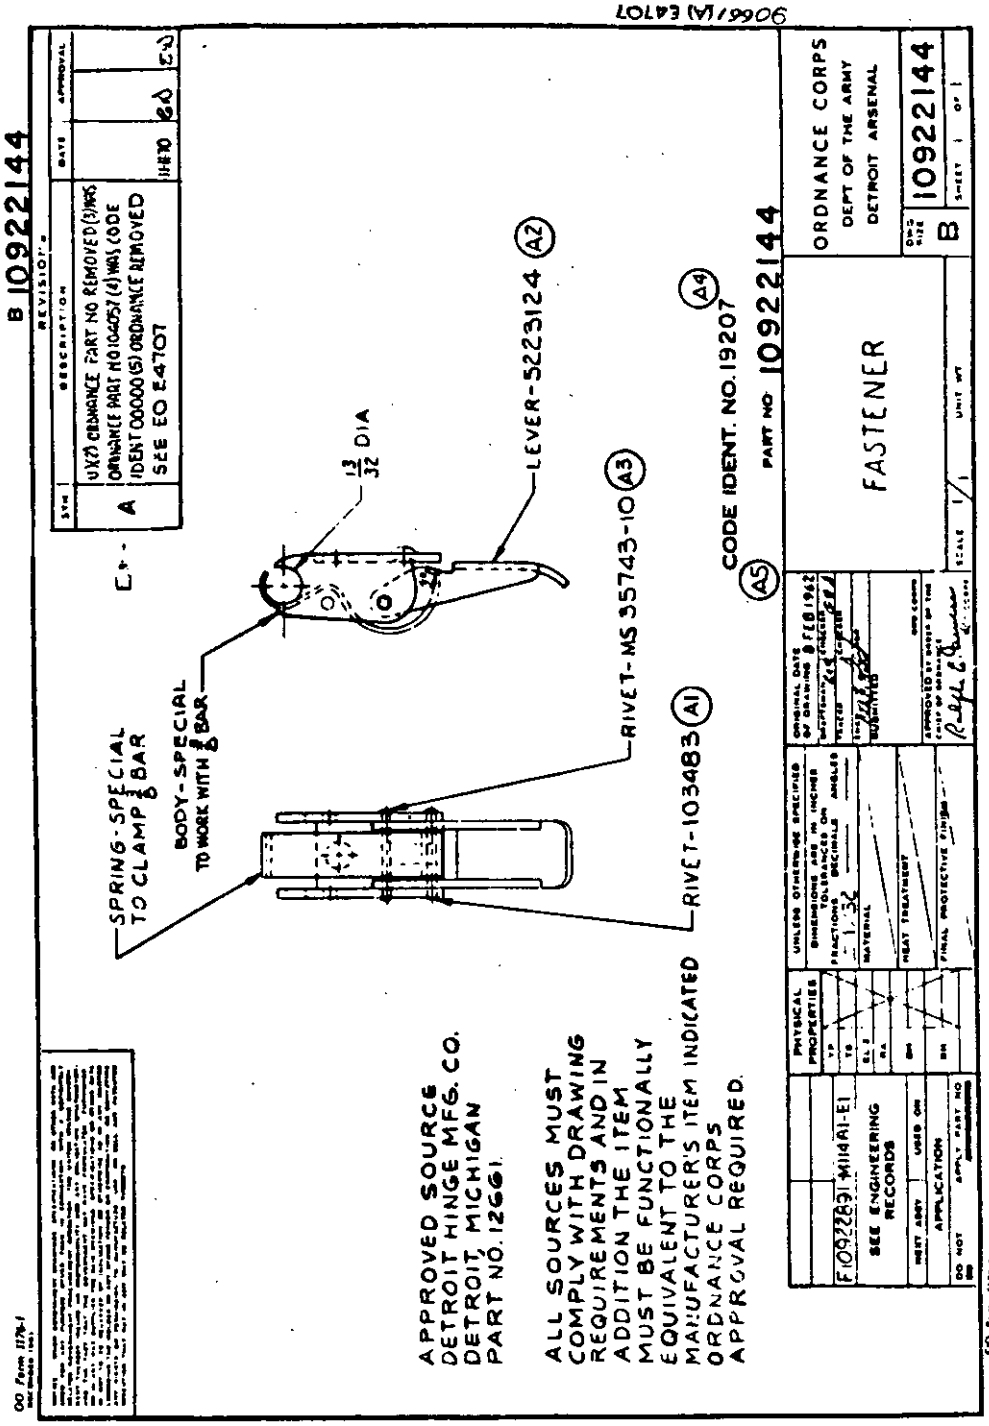


FIGURE 18. FASTENER.

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:48Z
Check the source to verify that this is the current version before use.

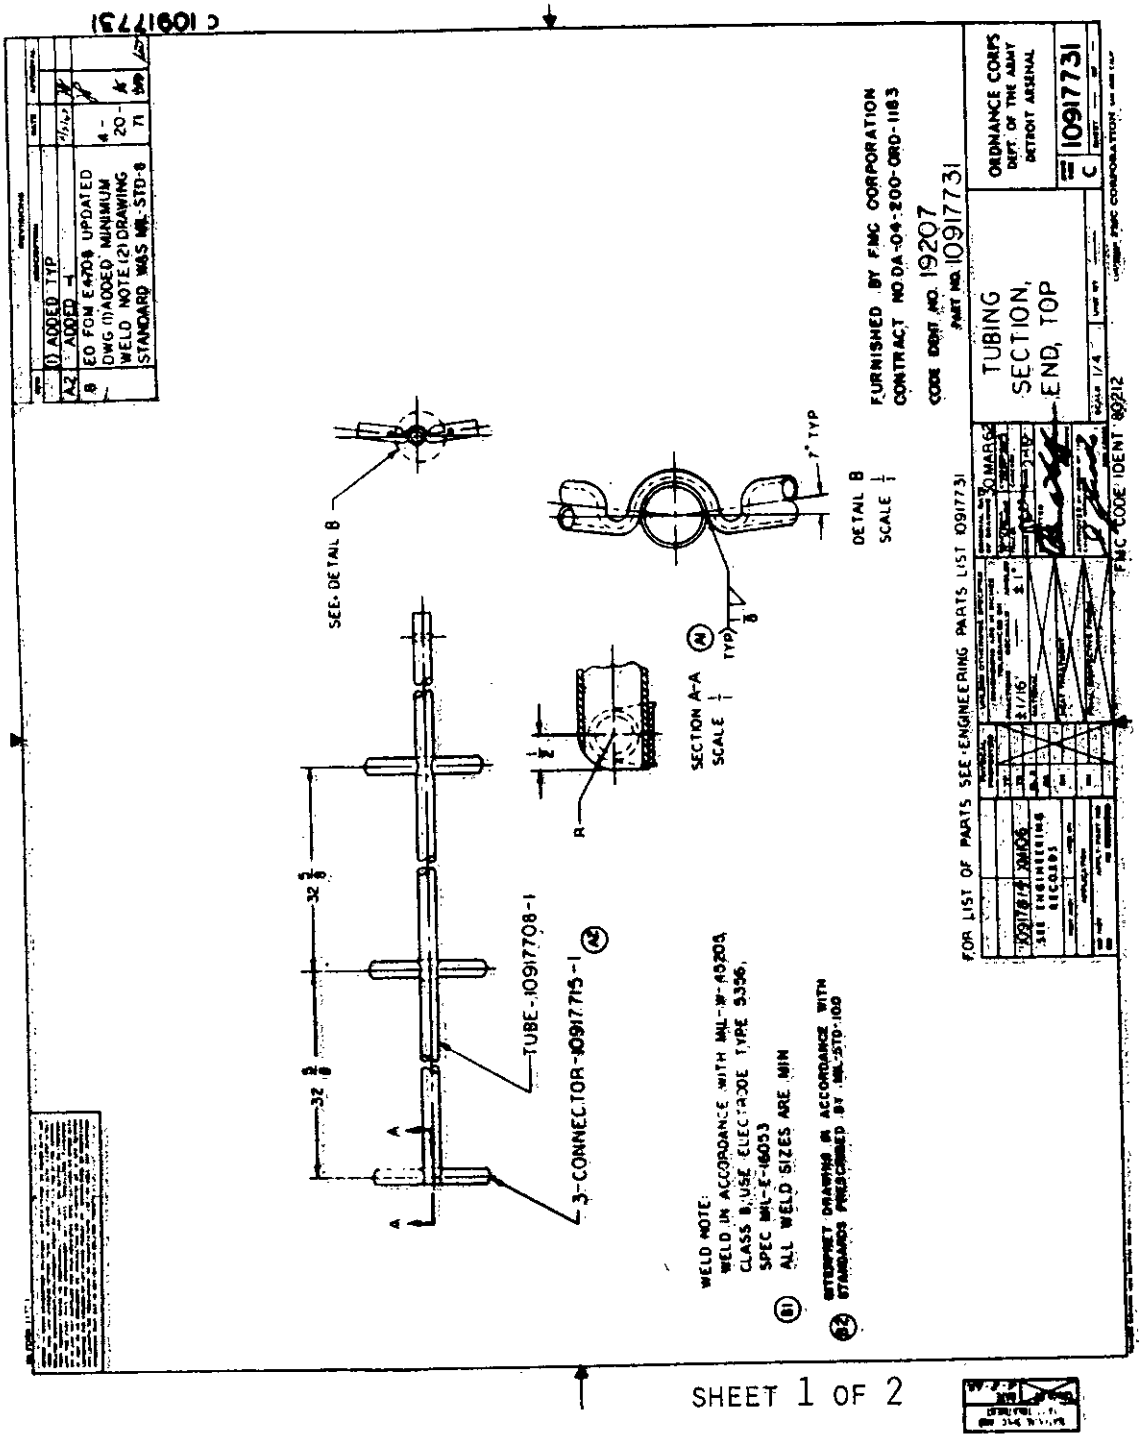


FIGURE 19. TUBING SECTION, END, TOP.

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:48Z
Check the source to verify that this is the current version before use.

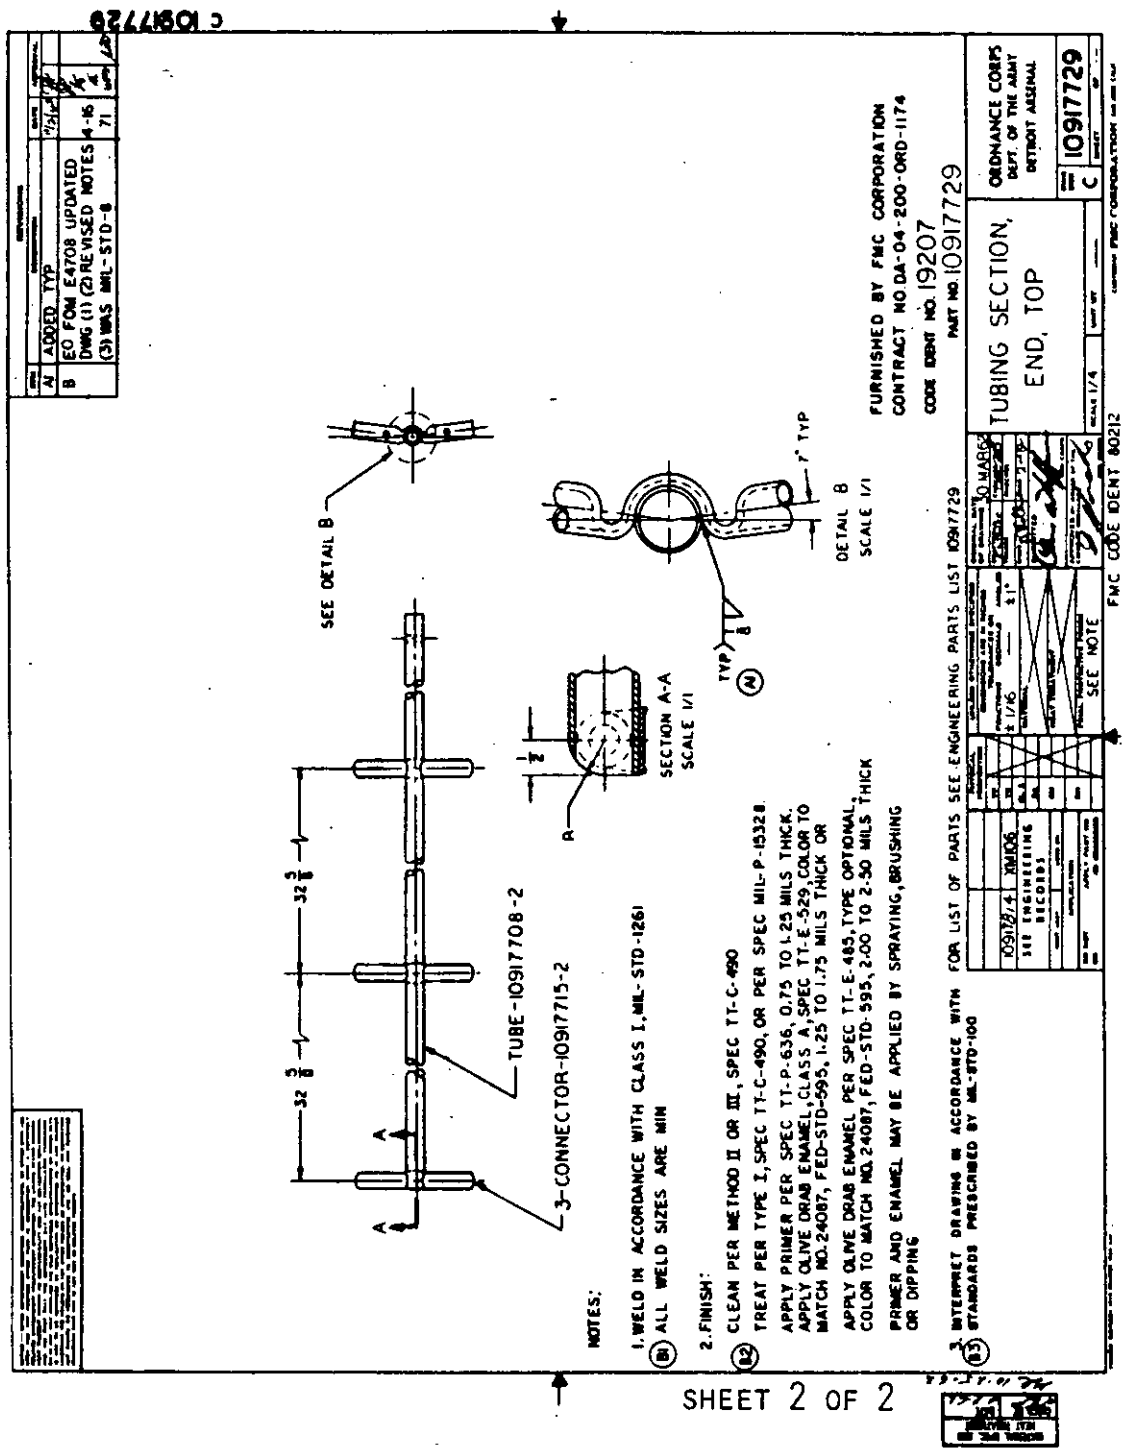


FIGURE 19. TUBING SECTION, END, TOP. - CONTINUED

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:48Z
Check the source to verify that this is the current version before use.

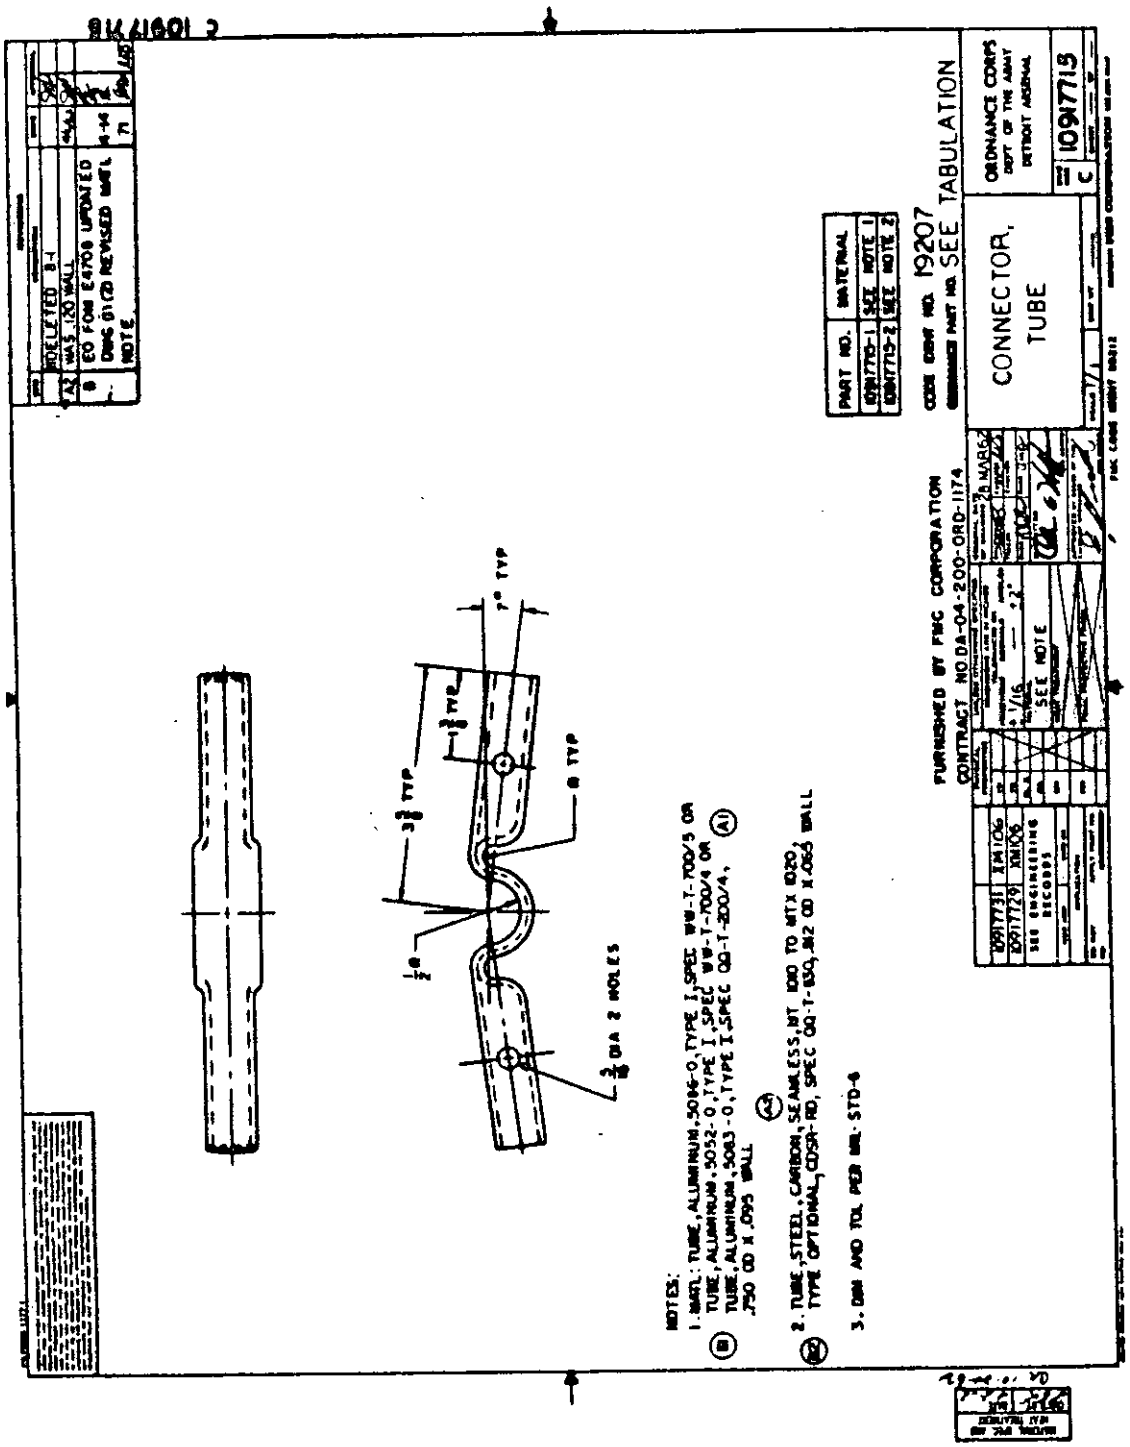


FIGURE 20. CONNECTOR, TUBE.

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:48Z
Check the source to verify that this is the current version before use.

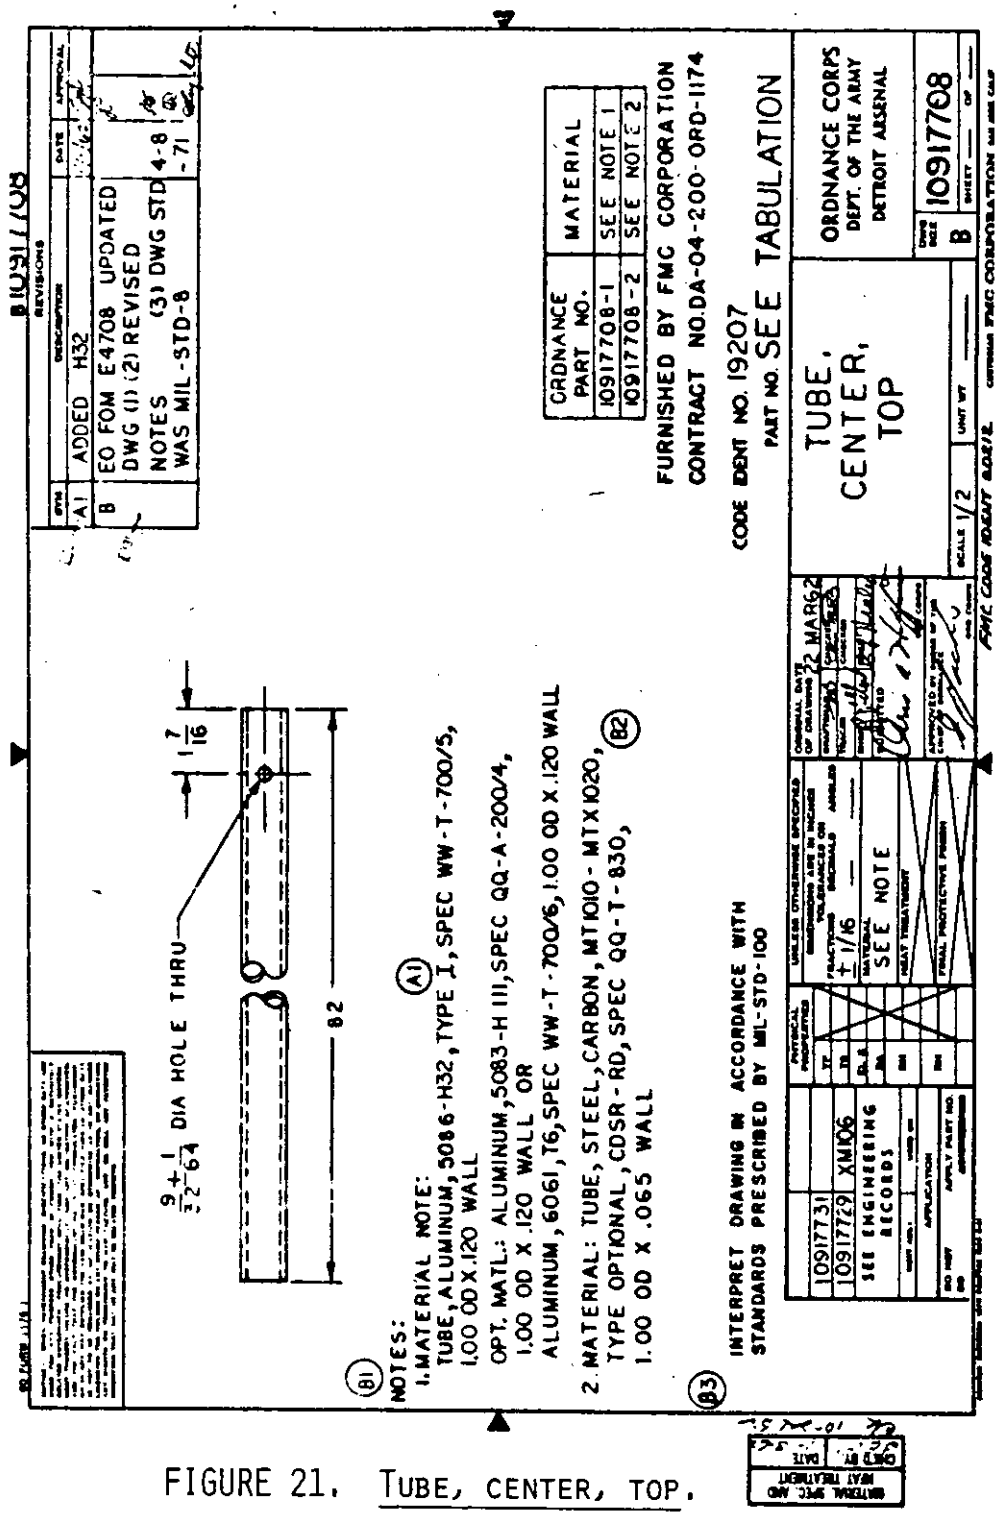


FIGURE 21. TUBE, CENTER, TOP.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:48Z
Check the source to verify that this is the current version before use.

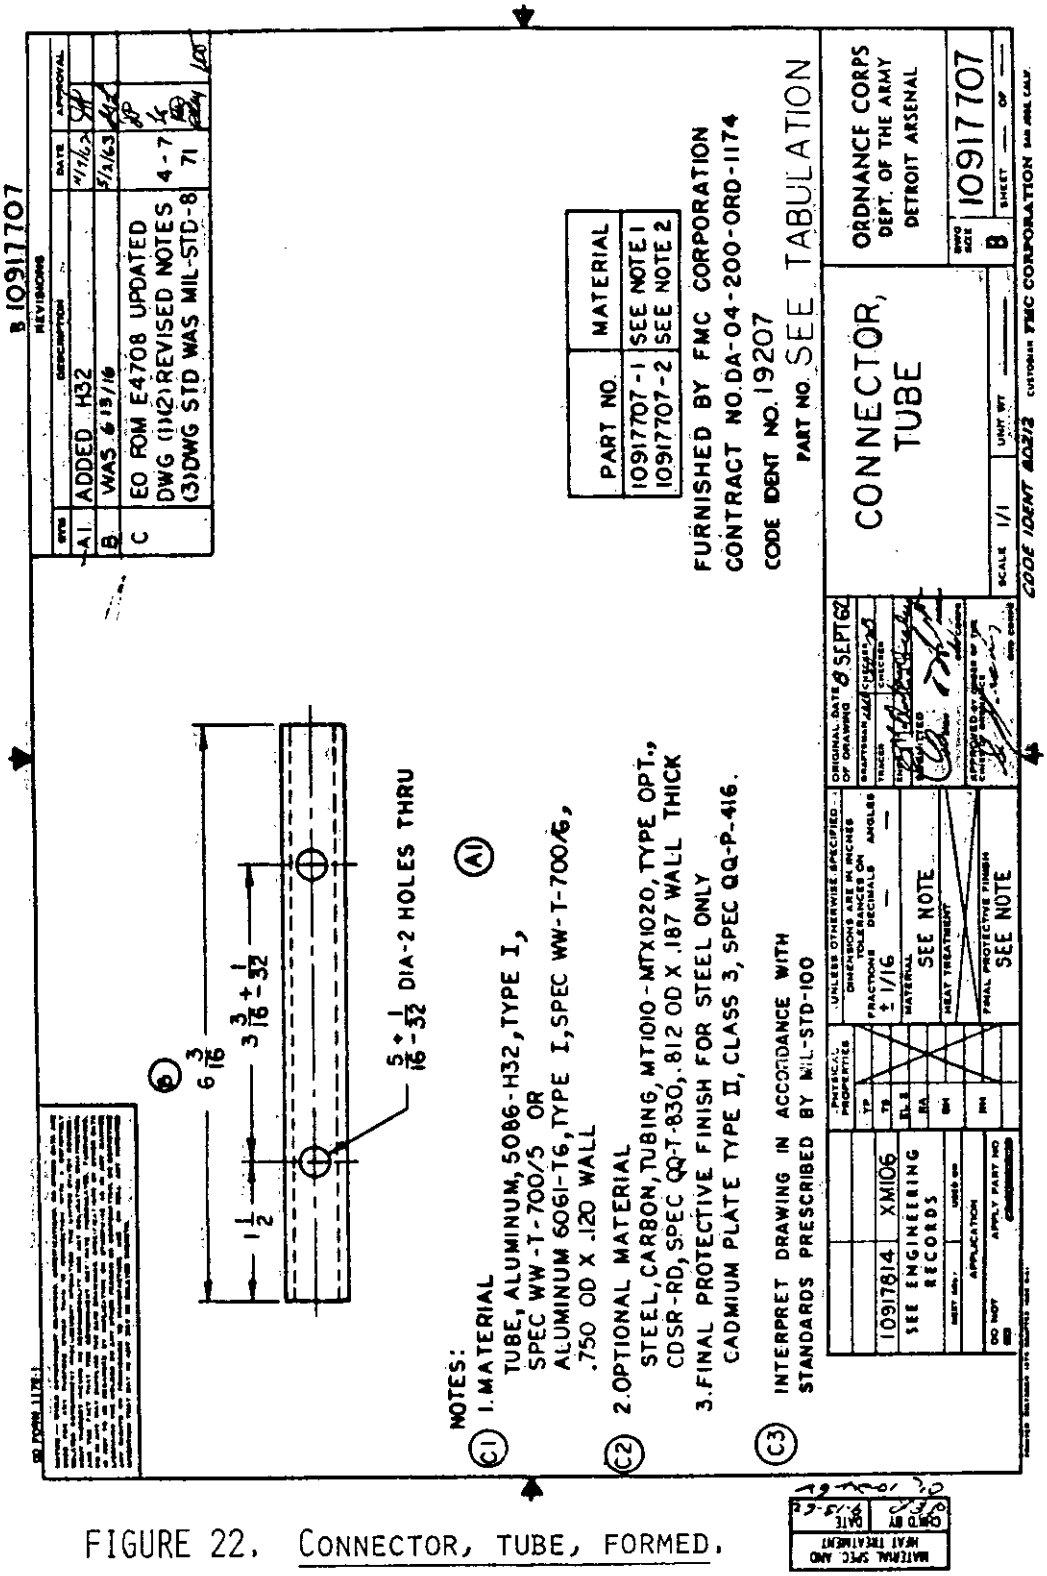


FIGURE 22. CONNECTOR, TUBE, FORMED.

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:48Z
Check the source to verify that this is the current version before use.

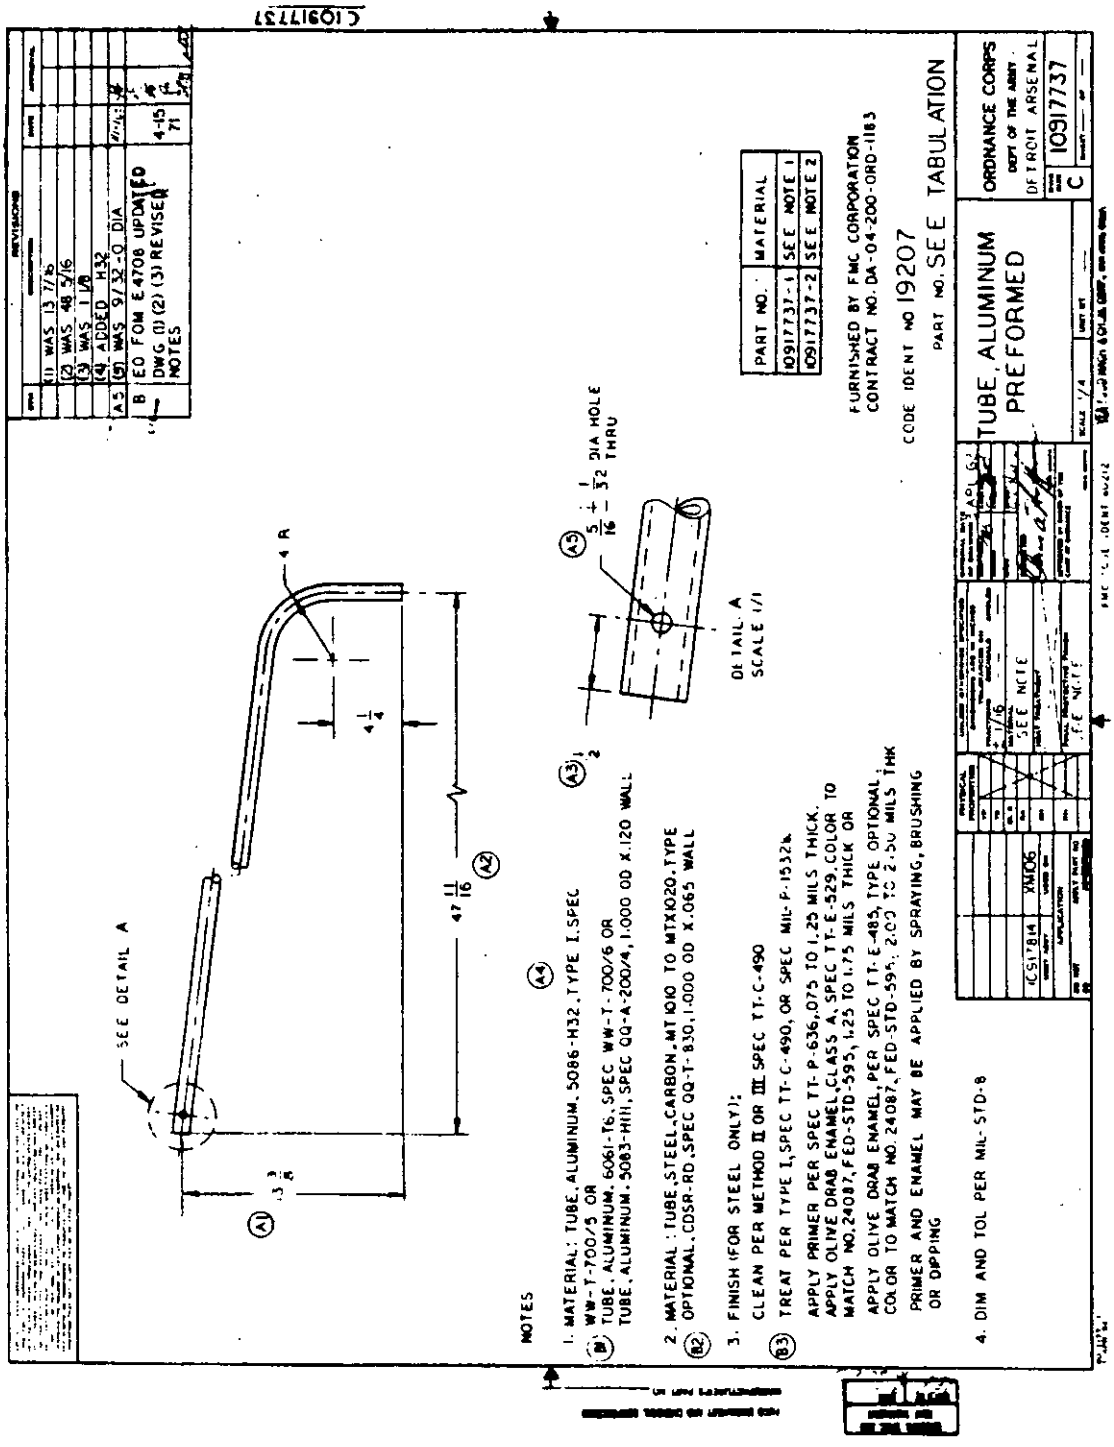


FIGURE 23. TUBE, ALUMINUM PREFORMED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:48Z
Check the source to verify that this is the current version before use.


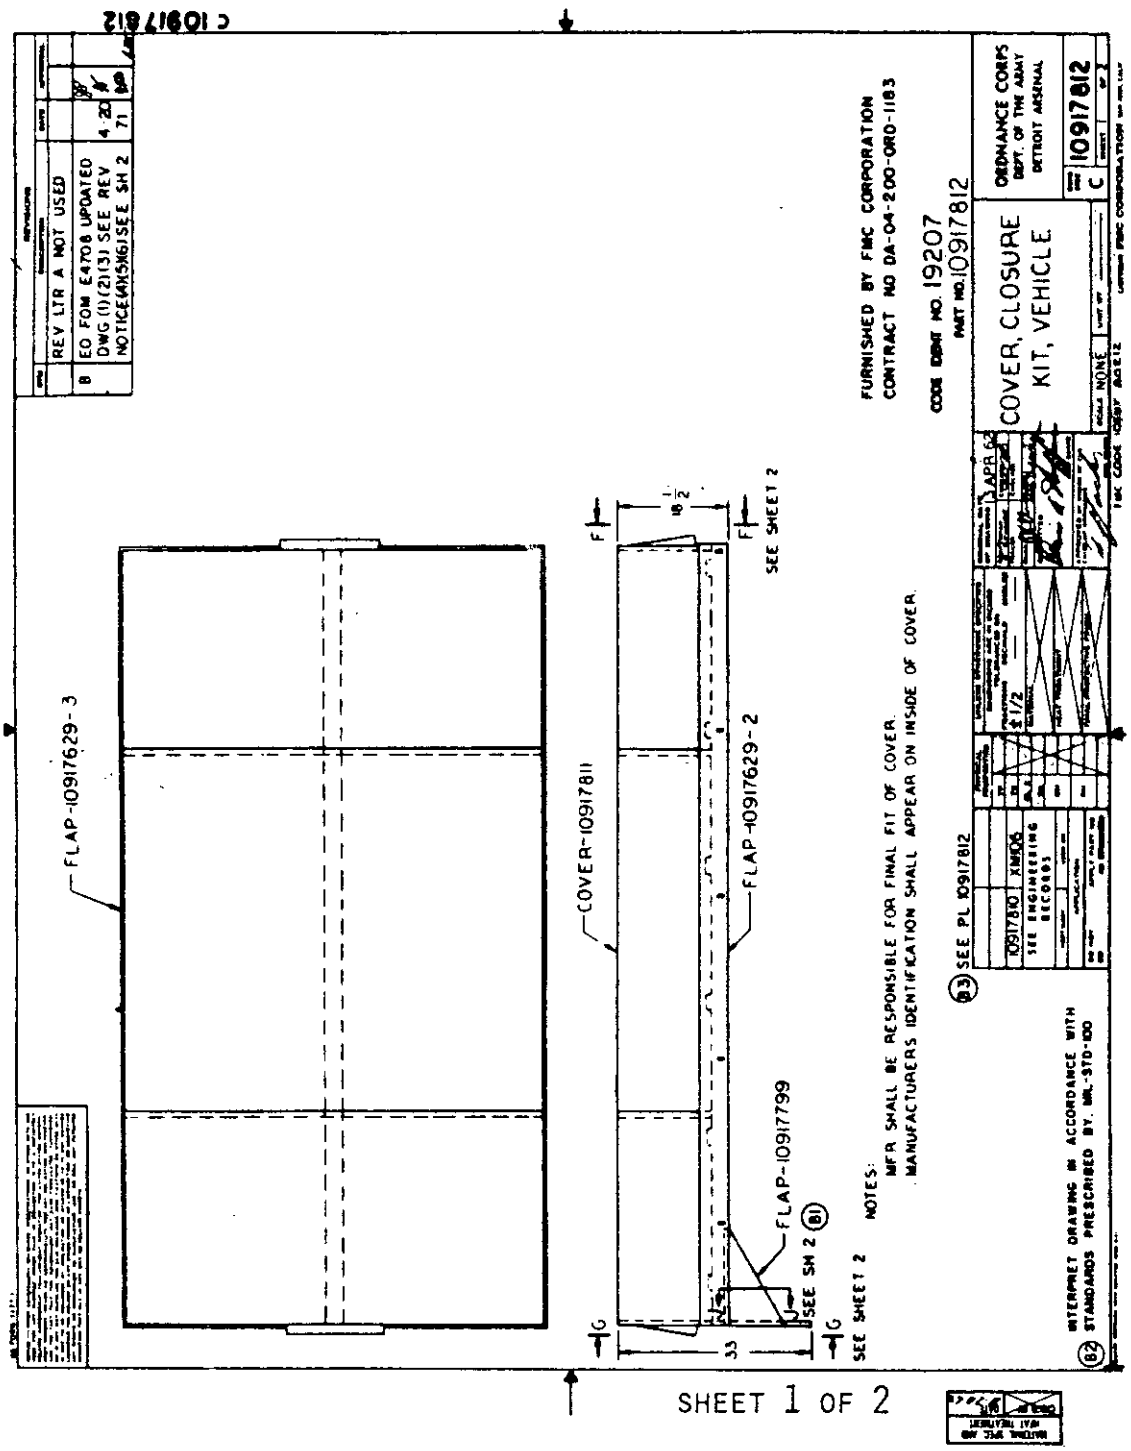


FIGURE 24. COVER, CLOSURE KIT, VEHICLE.

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:48Z
Check the source to verify that this is the current version before use.

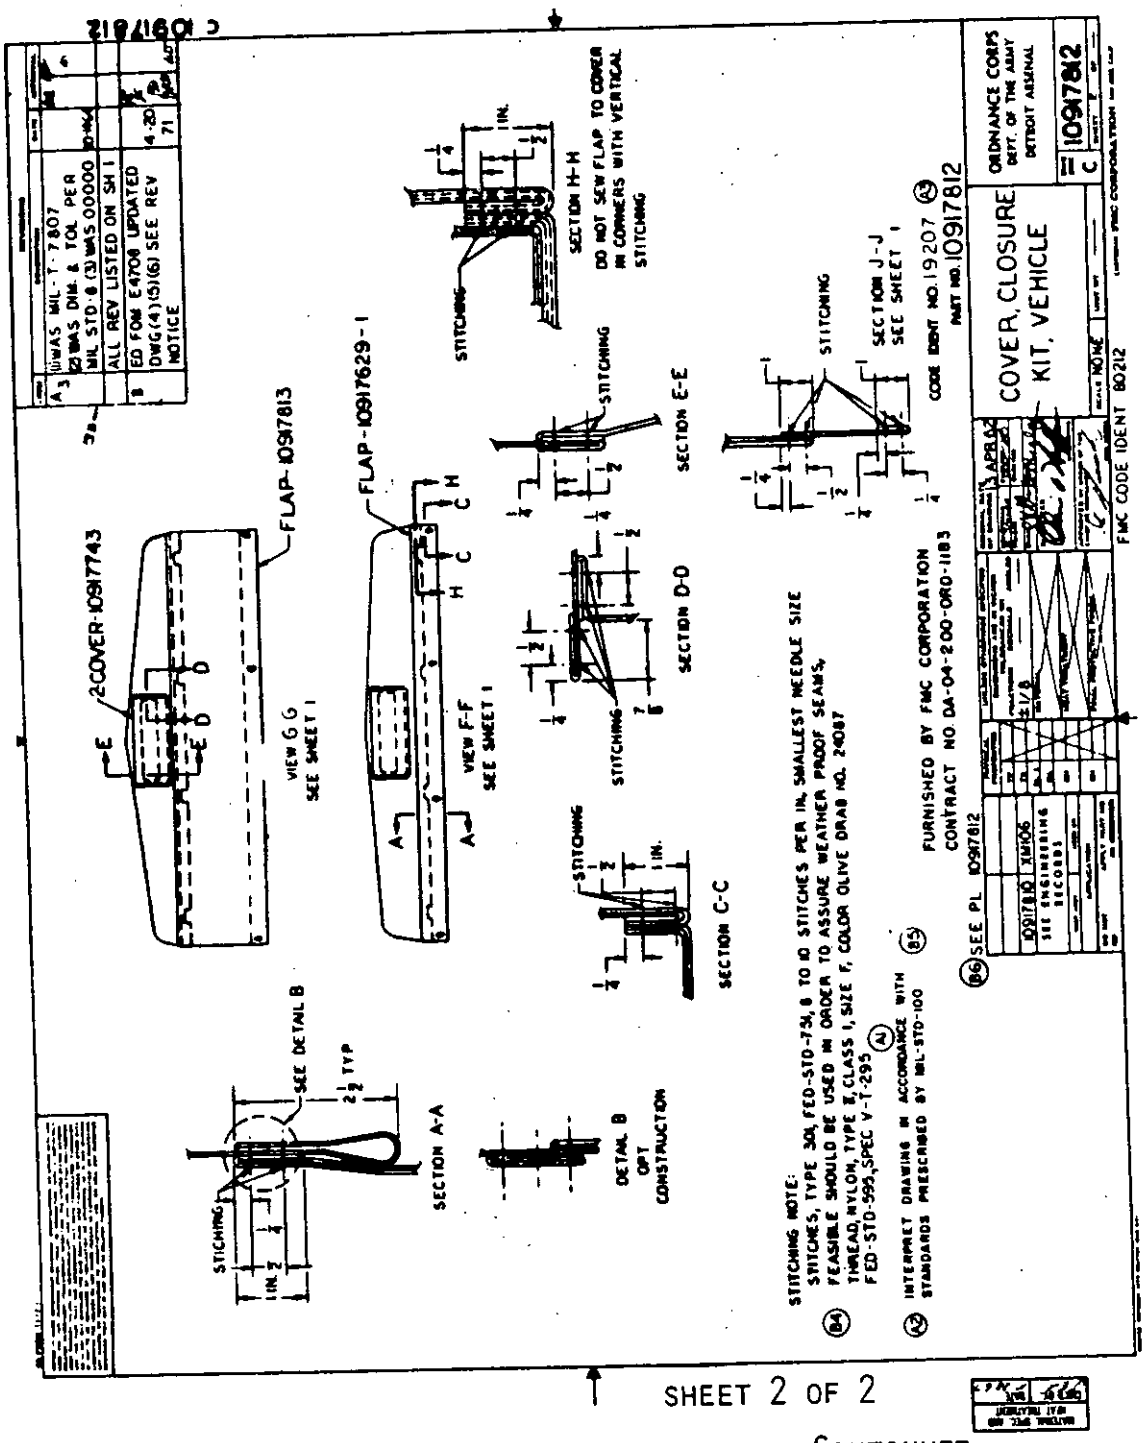

SHEET 2 OF 2

FIGURE 24. COVER, CLOSURE KIT, VEHICLE. - CONTINUED

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:48Z
Check the source to verify that this is the current version before use.

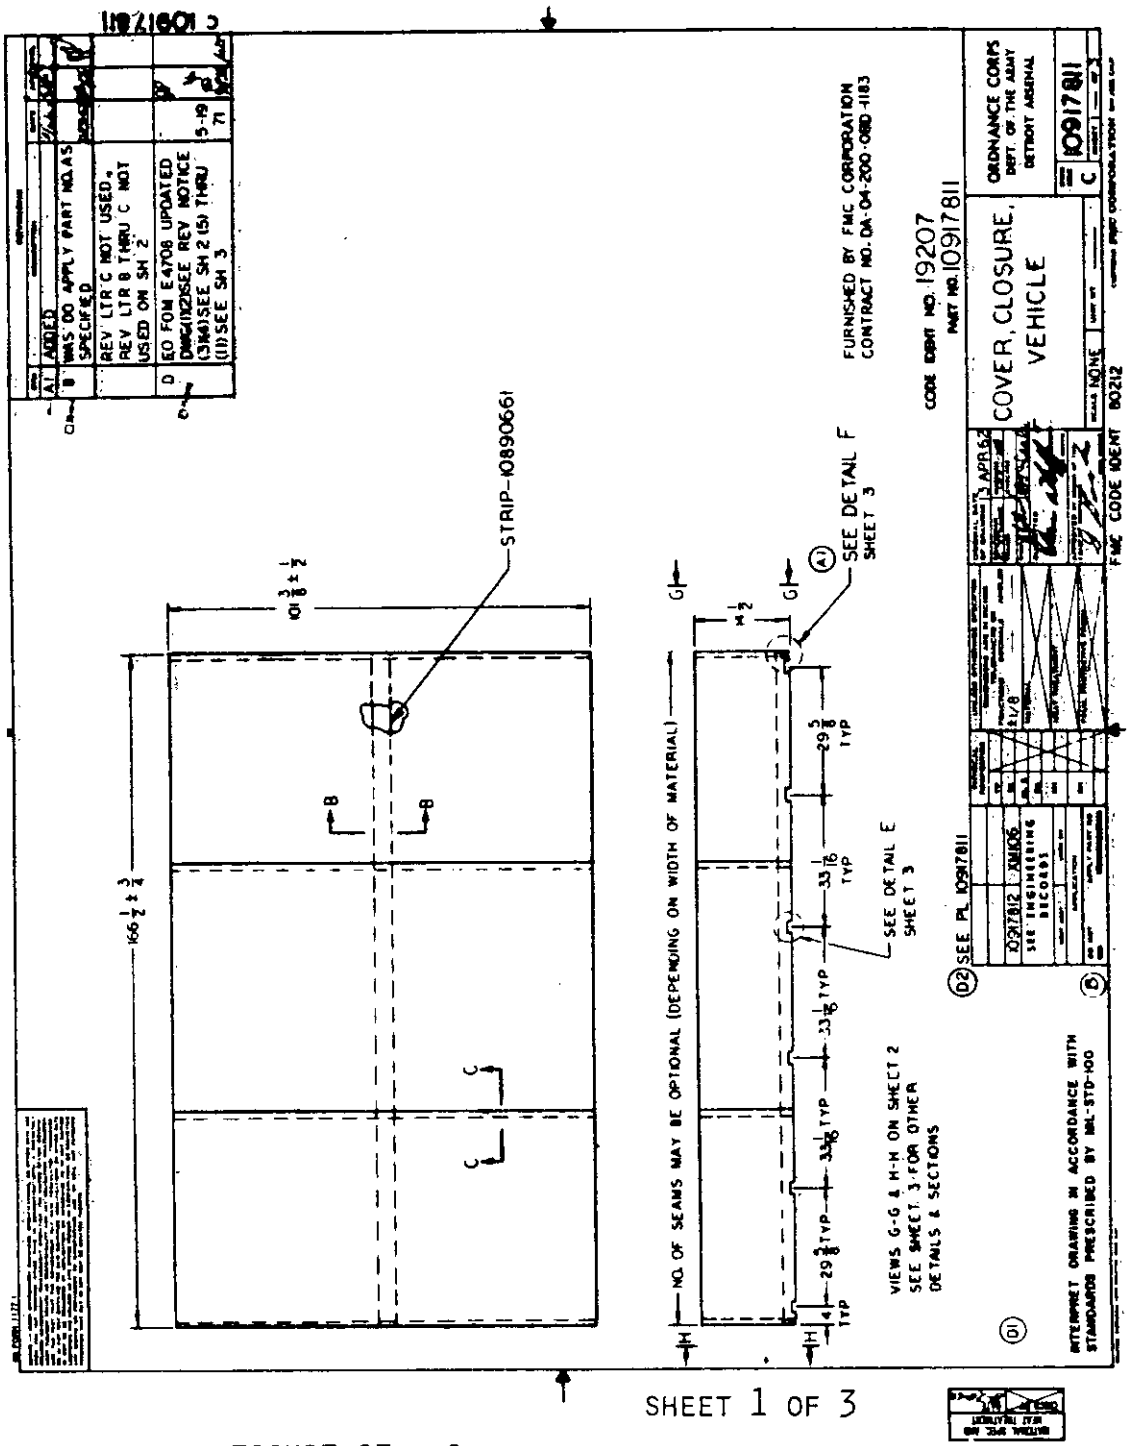


FIGURE 25. COVER, CLOSURE, VEHICLE.

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:48Z
Check the source to verify that this is the current version before use.

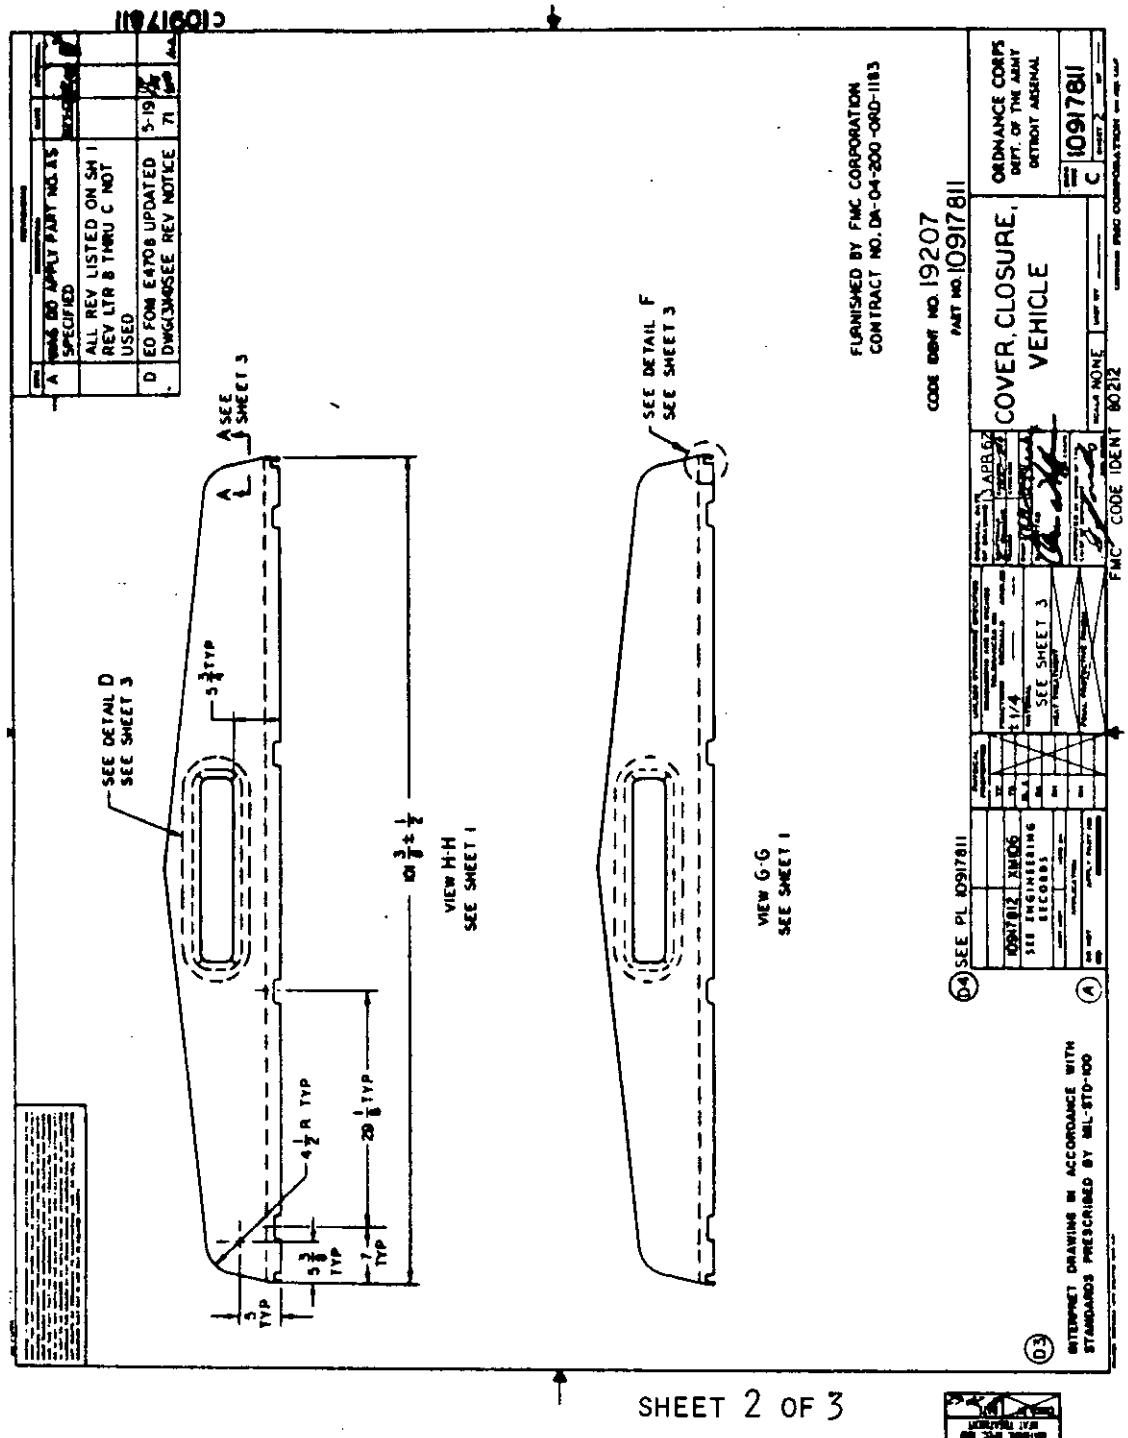


FIGURE 25. COVER, CLOSURE, VEHICLE. - CONTINUED

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:48Z
Check the source to verify that this is the current version before use.

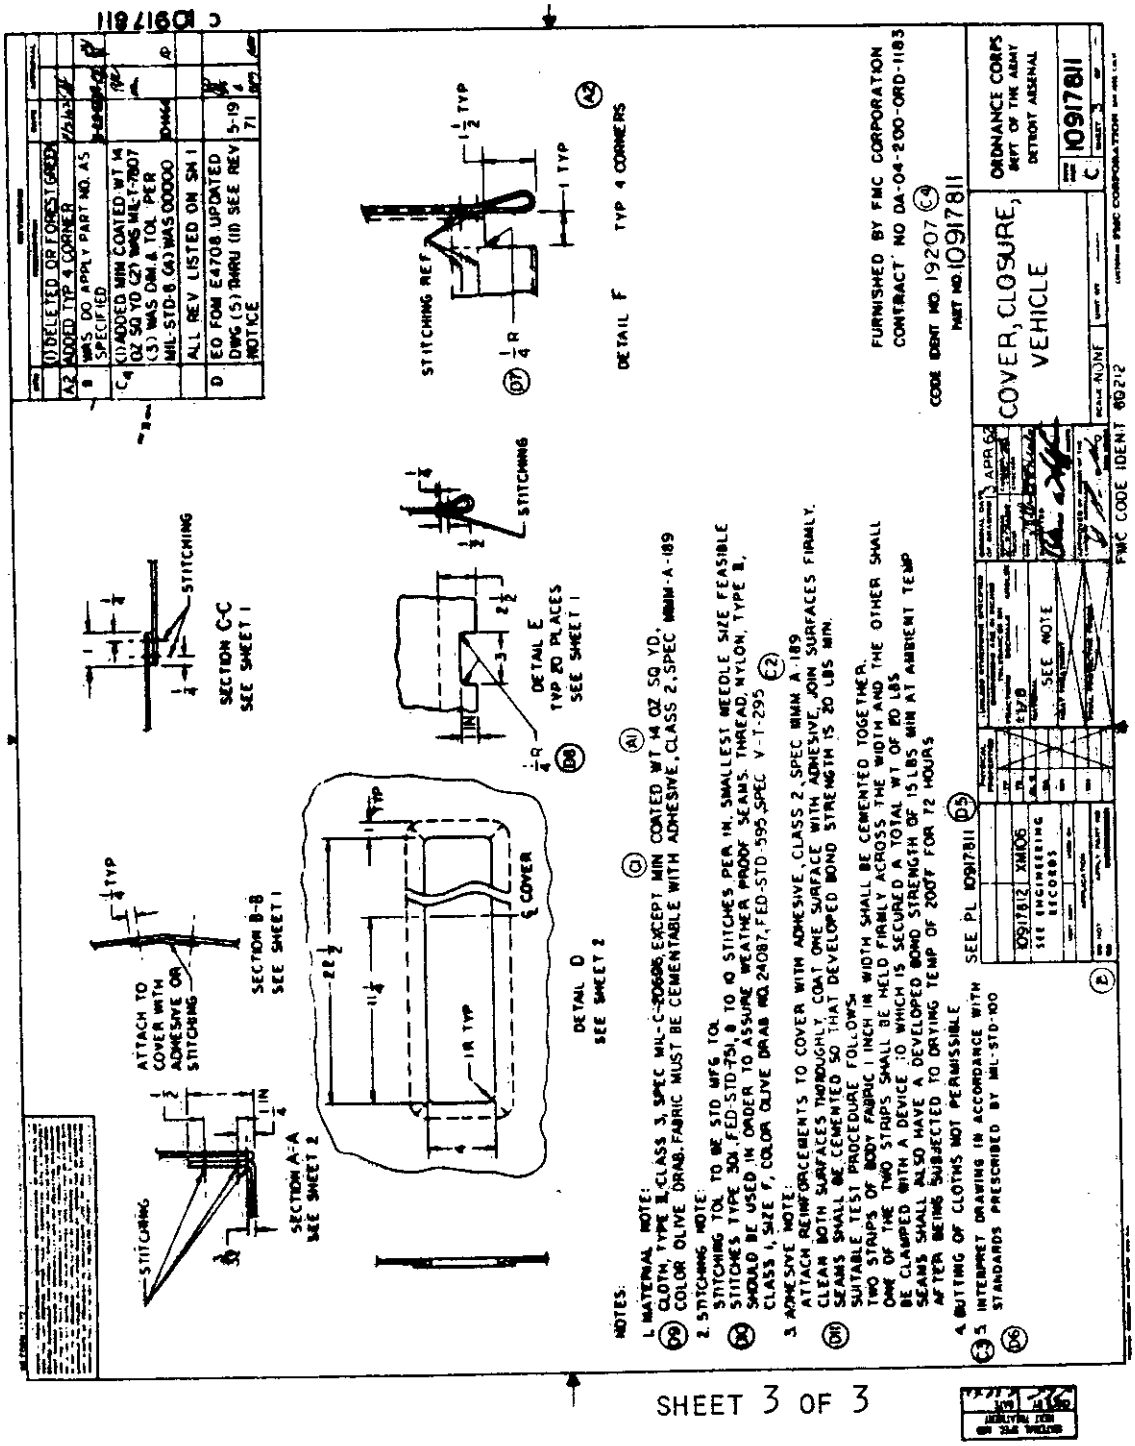


FIGURE 25. COVER, CLOSURE, VEHICLE. - CONTINUED

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:48Z
Check the source to verify that this is the current version before use.

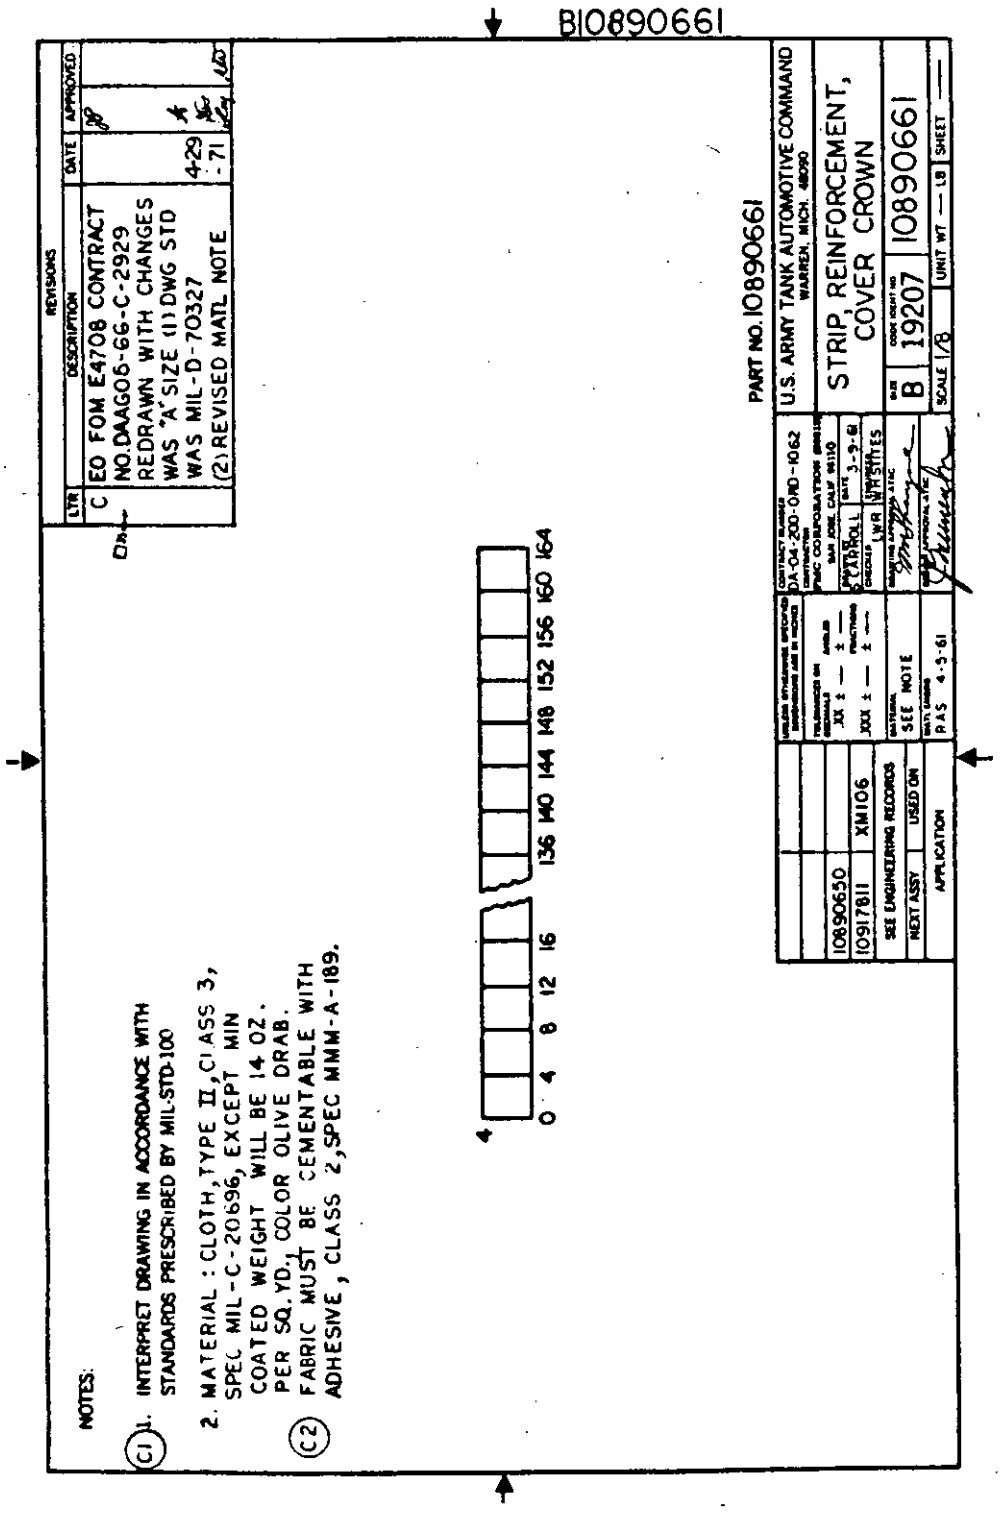


FIGURE 26. STRIP, REINFORCEMENT, COVER CROWN.

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:48Z
Check the source to verify that this is the current version before use.

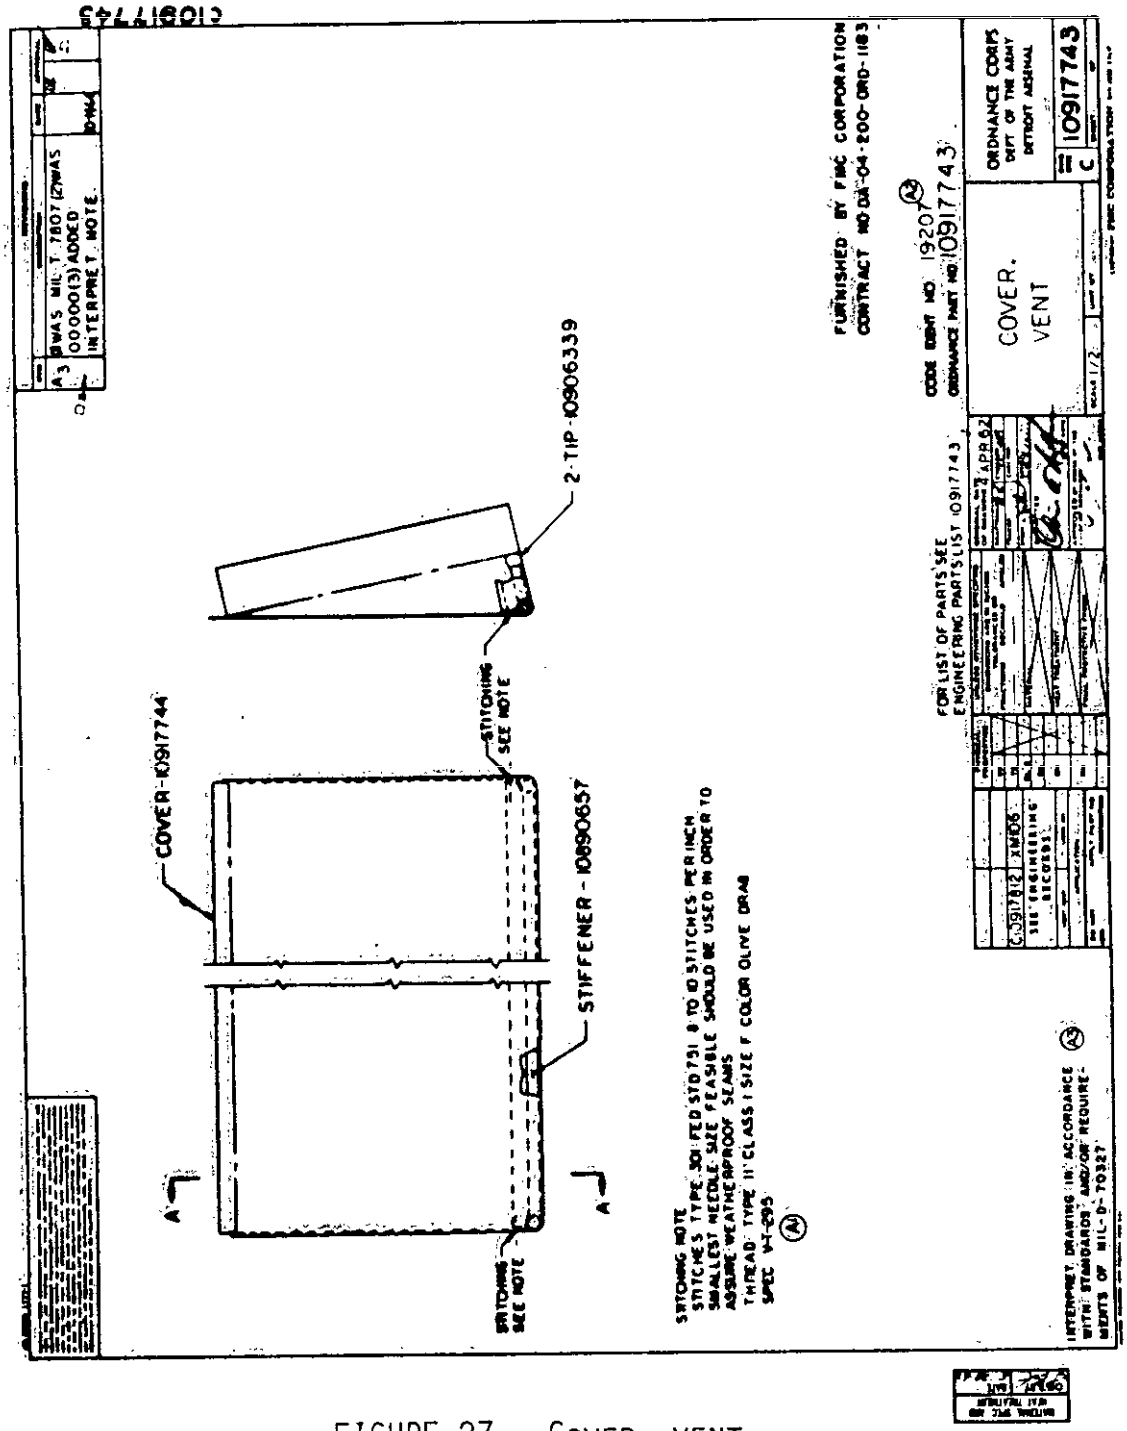


FIGURE 27. COVER, VENT.

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:48Z
Check the source to verify that this is the current version before use.

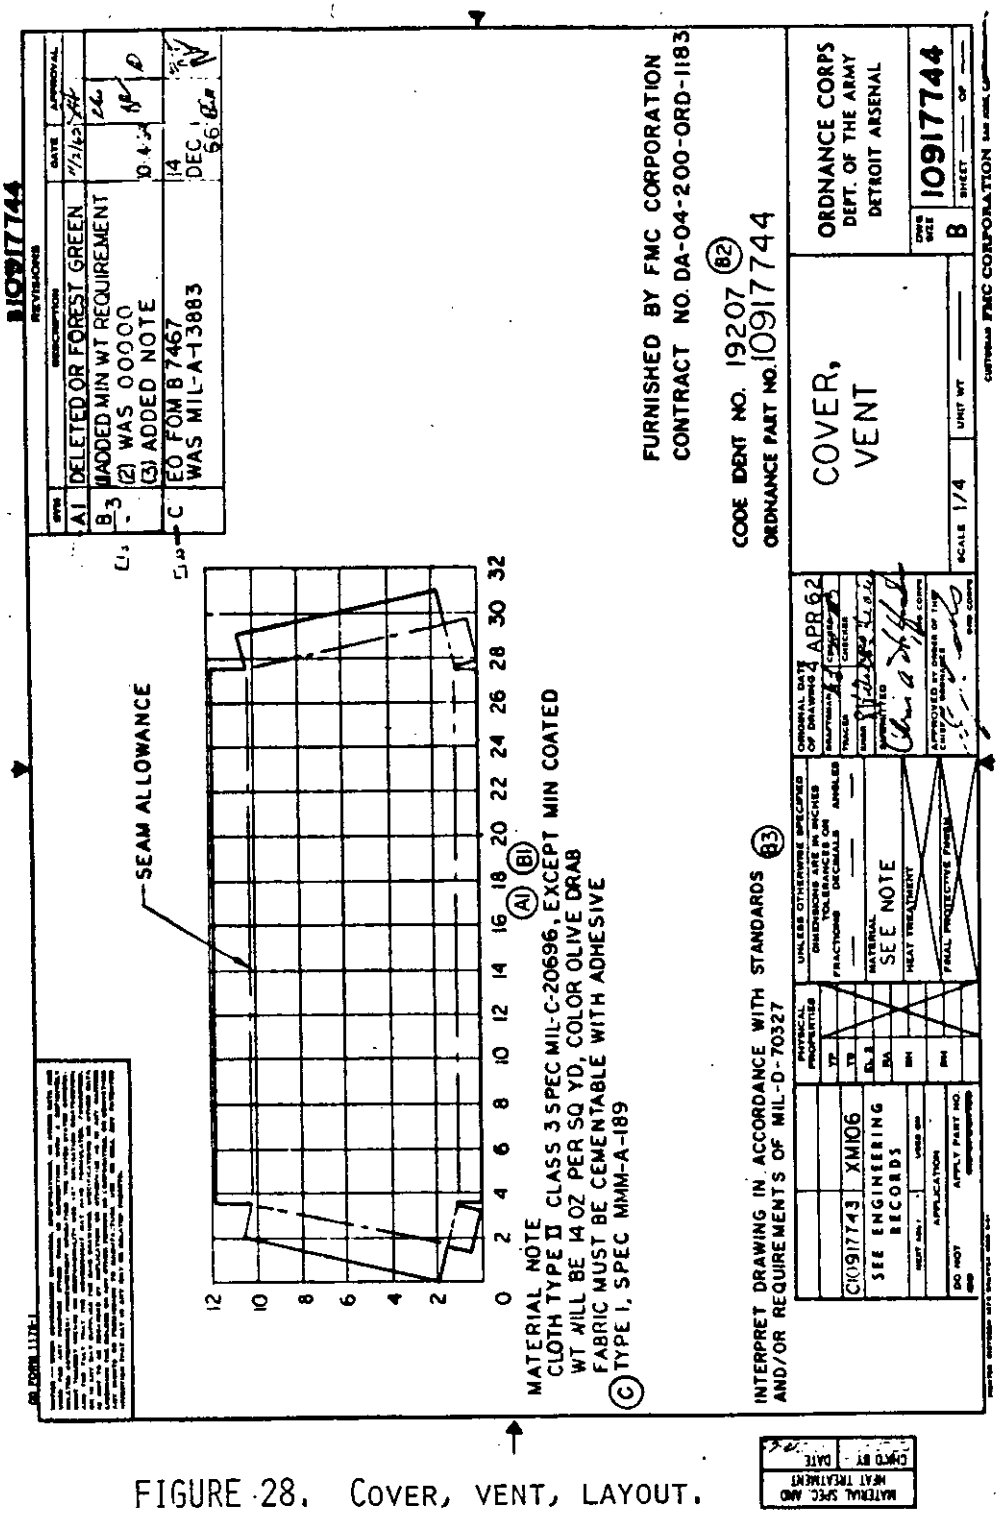


FIGURE 28. COVER, VENT, LAYOUT.

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:48Z
Check the source to verify that this is the current version before use.

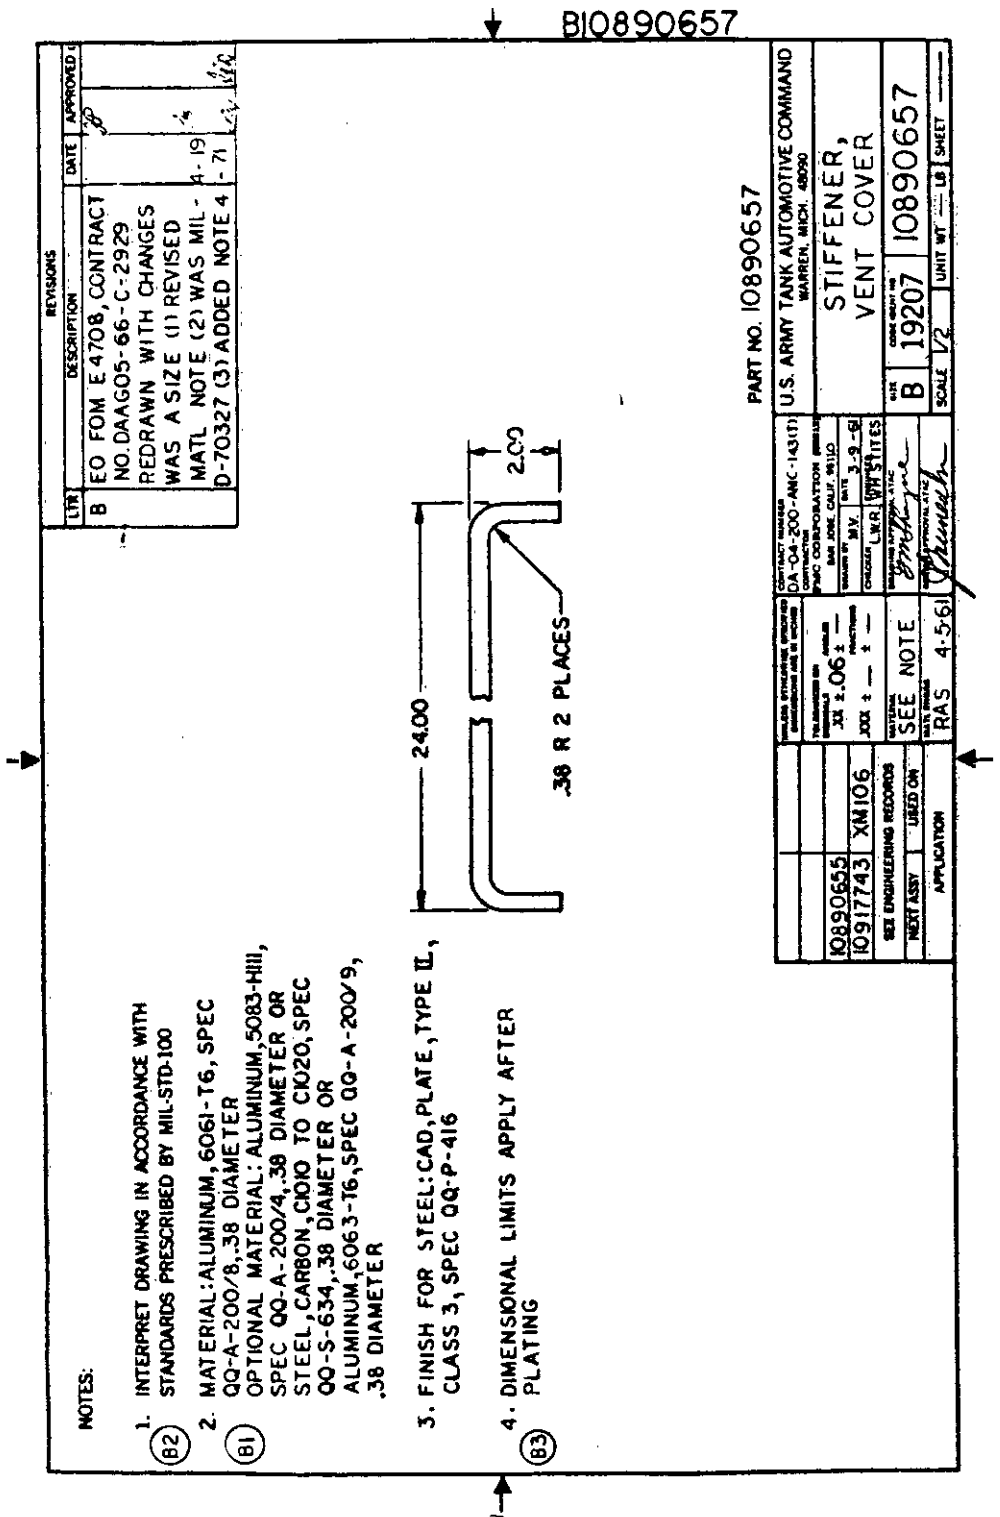


FIGURE 29. STIFFENER, VENT COVER.

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:48Z
Check the source to verify that this is the current version before use.

A 10906339

PHYSICAL PROPERTIES		DO NOT DO	APPLY PART NO. AS SPECIFIED
TP		APPLICATION	
TS			
EL2		SEE ENGINEERING RECORDS	
RA			
BH		K10893957	
BN		C10917743	XM474

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVAL

TIP, RUBBER
SIZE W15, SPEC. -ZZ-T-351

SCHACHT RUBBER CO.
HUNTINGTON, INDIANA
OR APPROVED EQUAL

ORDNANCE PART NO. 10906339

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES; TOLERANCES ON FRACTIONS DECIMALS ANGLES	ORIGINAL DATE OF DRAWING MAR 29 1961	TIP, CANE AND CRUTCH	ORDNANCE CORPS DEPT OF THE ARMY DETROIT ARSENAL
MATERIAL	DRAWN AC / CHECKED NN		
HEAT TREATMENT	SUBMITTED	SCALE	SIZE A — 10906339
FINISH PROTECTIVE FINISH	APPROVED BY DIRECTOR OF ENGINEERING	UNIT WT	SHEET 1 OF 1

VEHICLE ENGINEERING AGENCY - CHRYSLER CORP

FIGURE 30. TIP, CANE, AND CRUTCH.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:48Z
Check the source to verify that this is the current version before use.

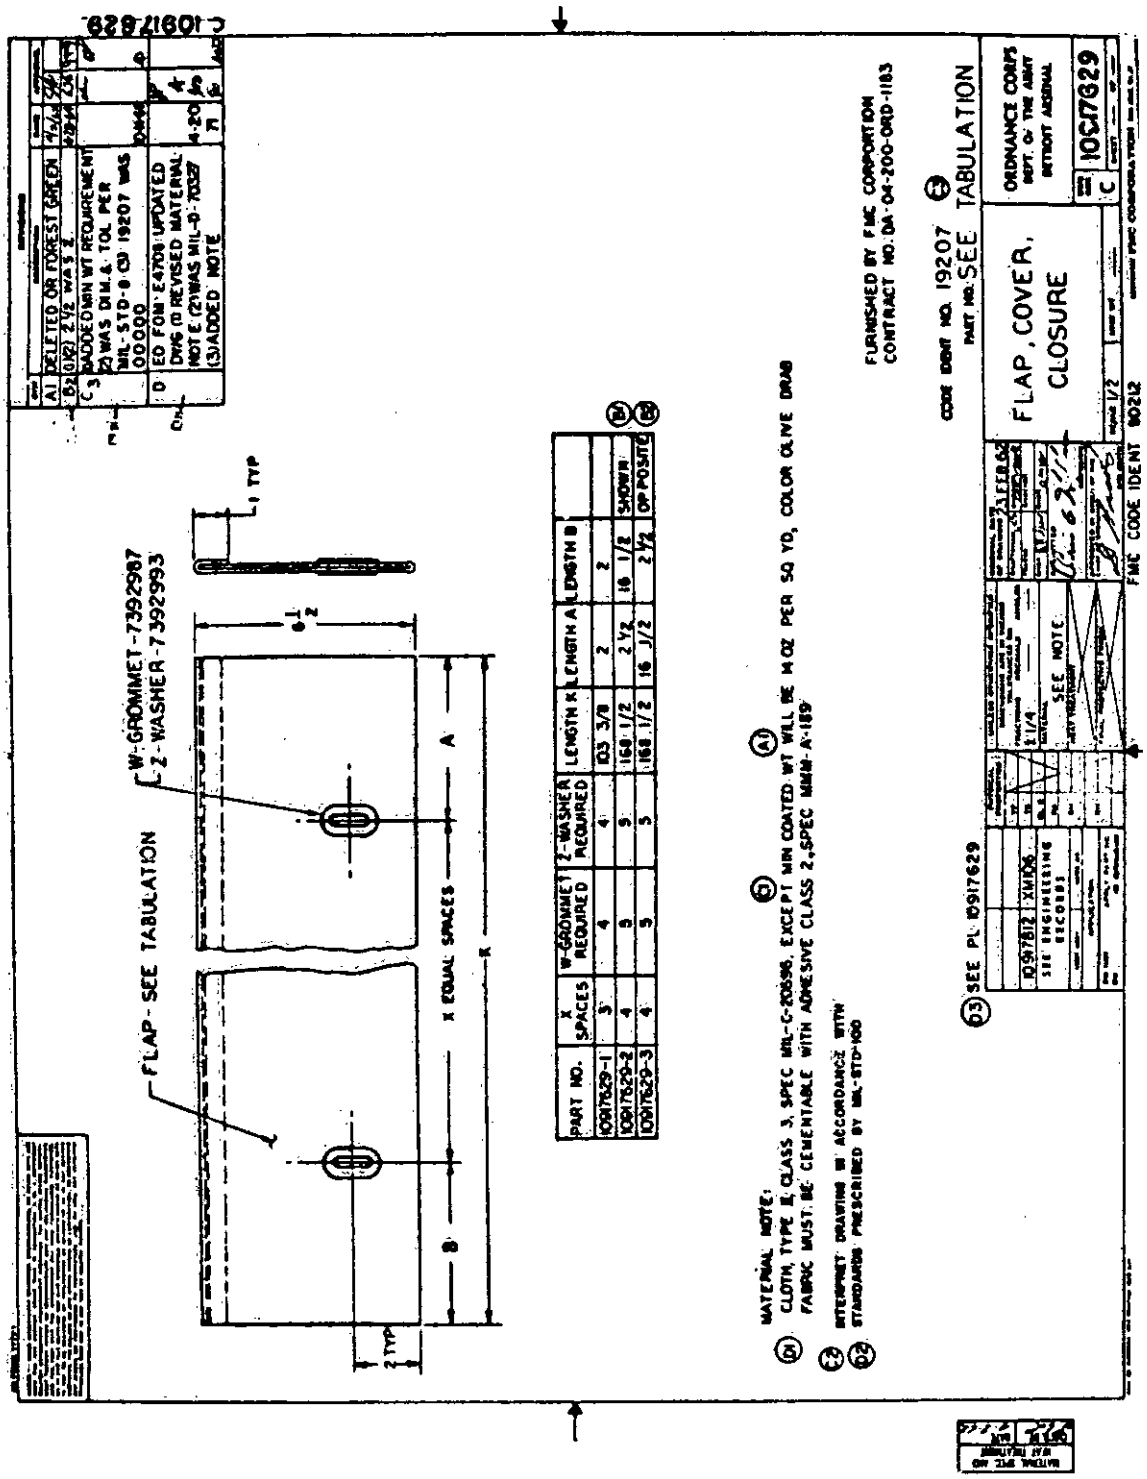


FIGURE 31. FLAP, COVER, CLOSURE.

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:48Z
Check the source to verify that this is the current version before use.

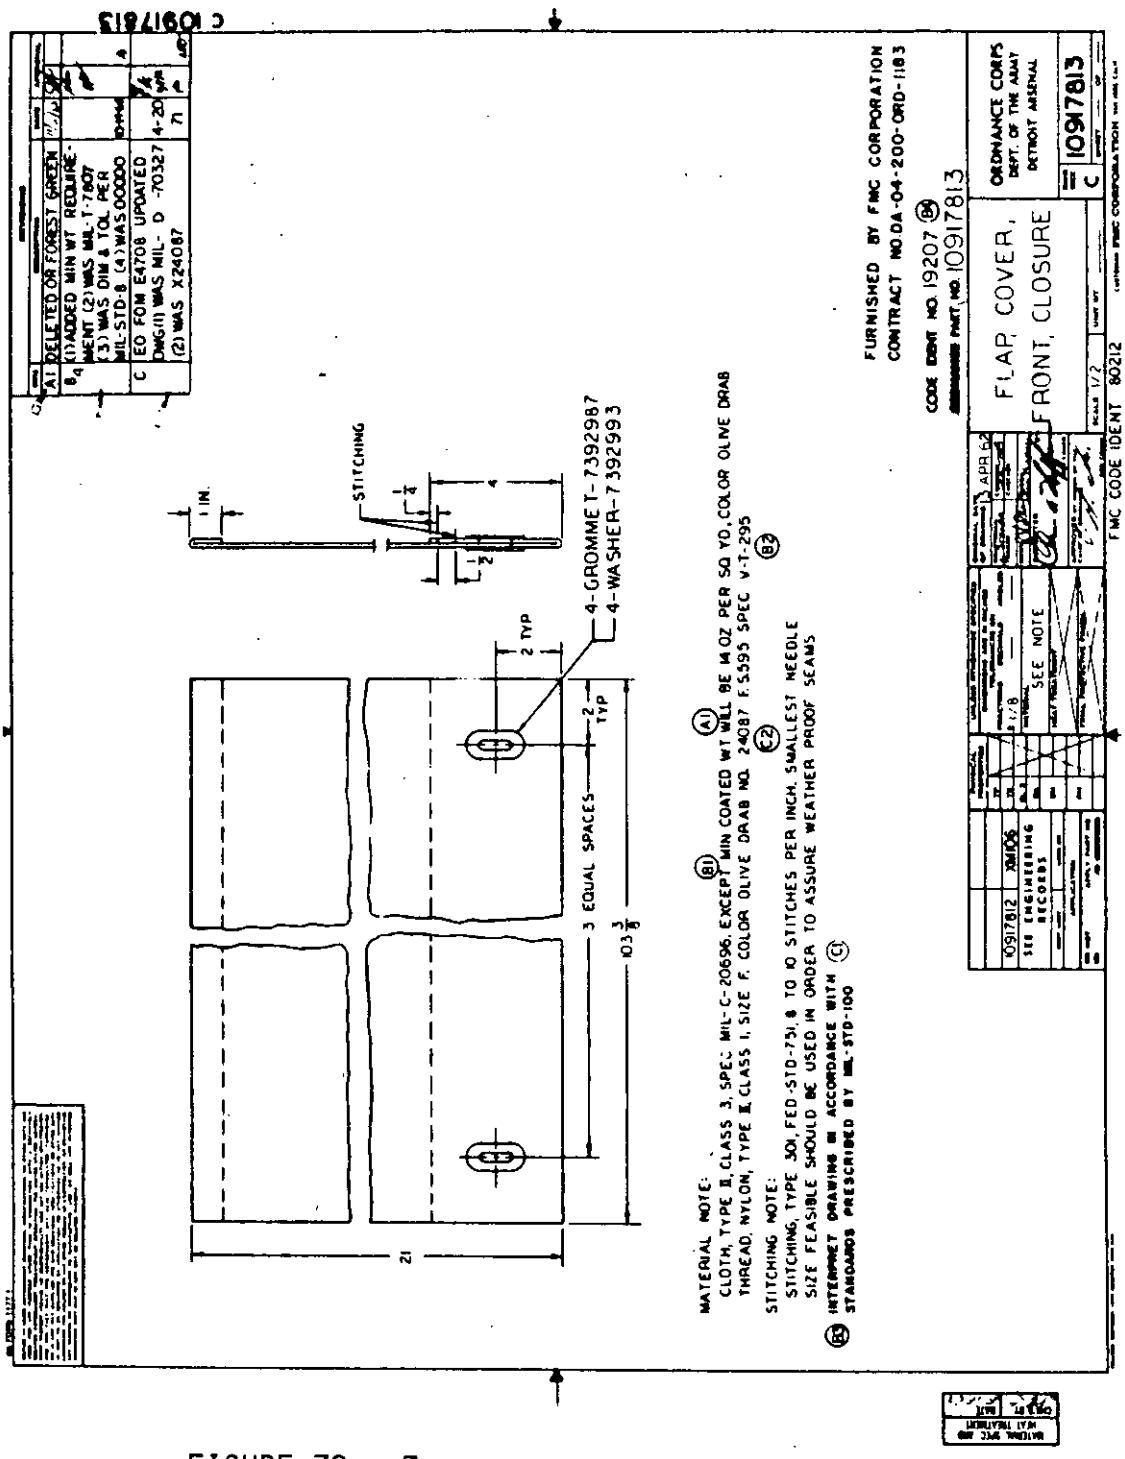


FIGURE 32. FLAP, COVER, FRONT, CLOSURE.

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:48Z
Check the source to verify that this is the current version before use.

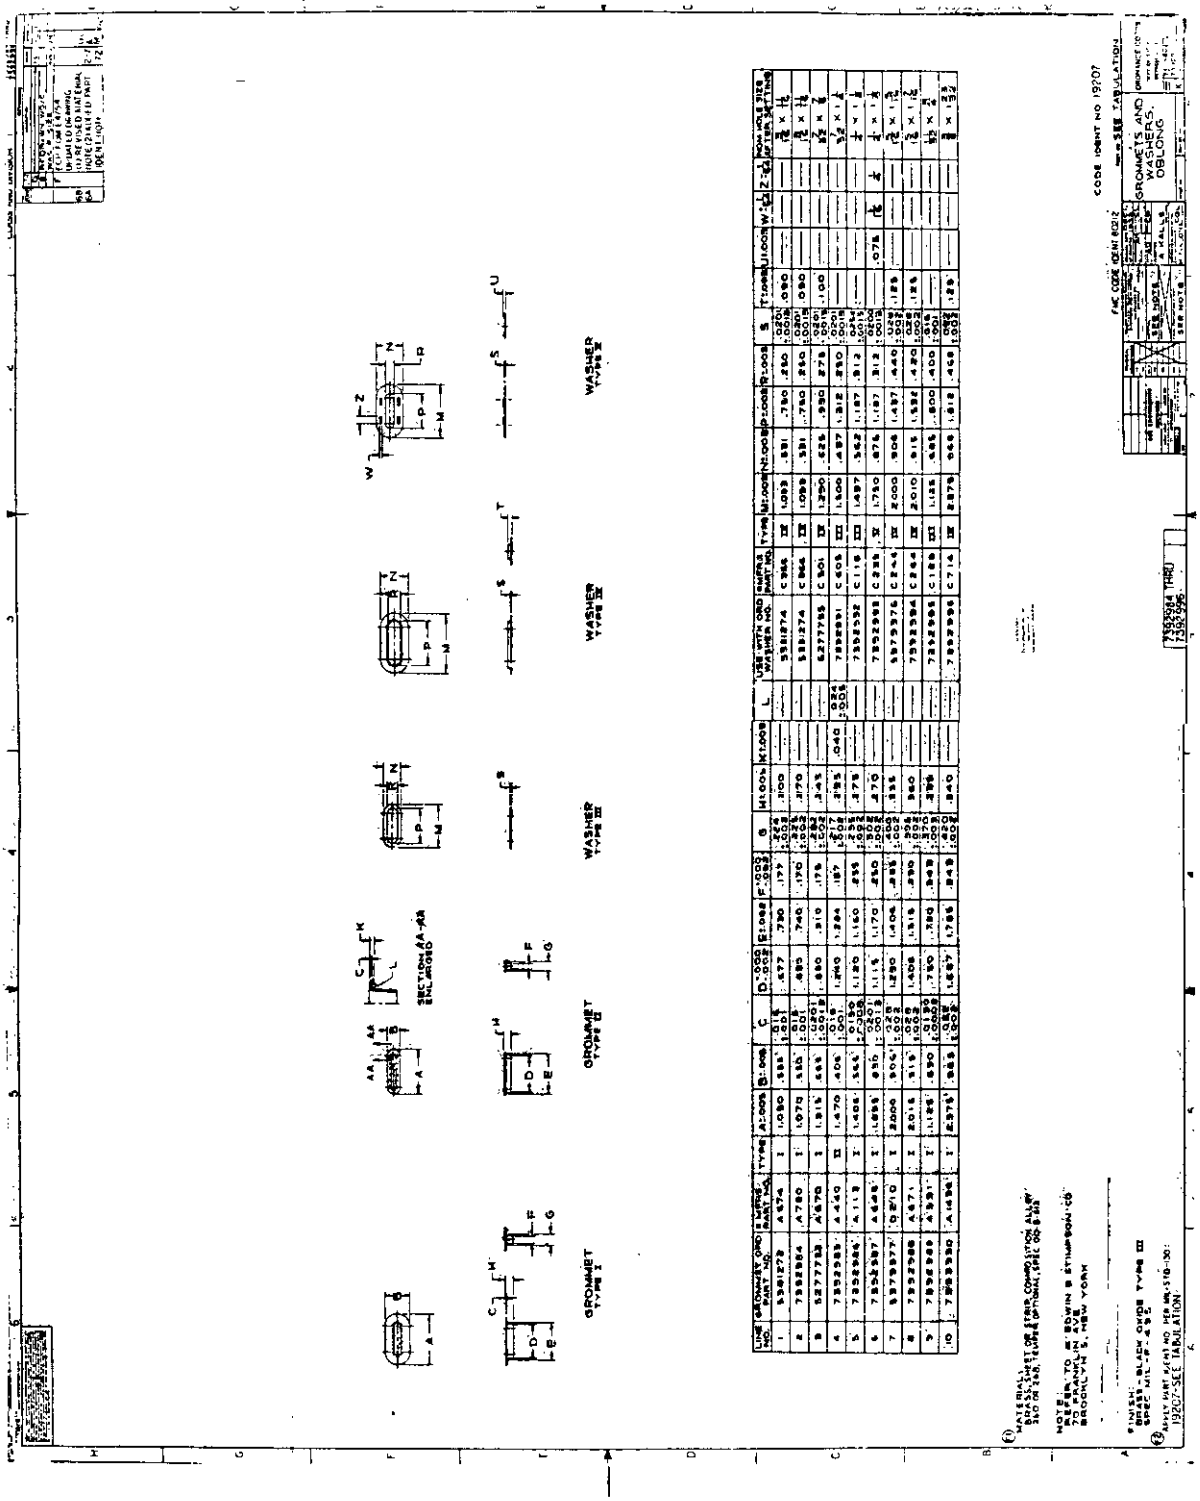


FIGURE 33. GROMMETS AND WASHERS, OBLONG.

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:48Z
Check the source to verify that this is the current version before use.

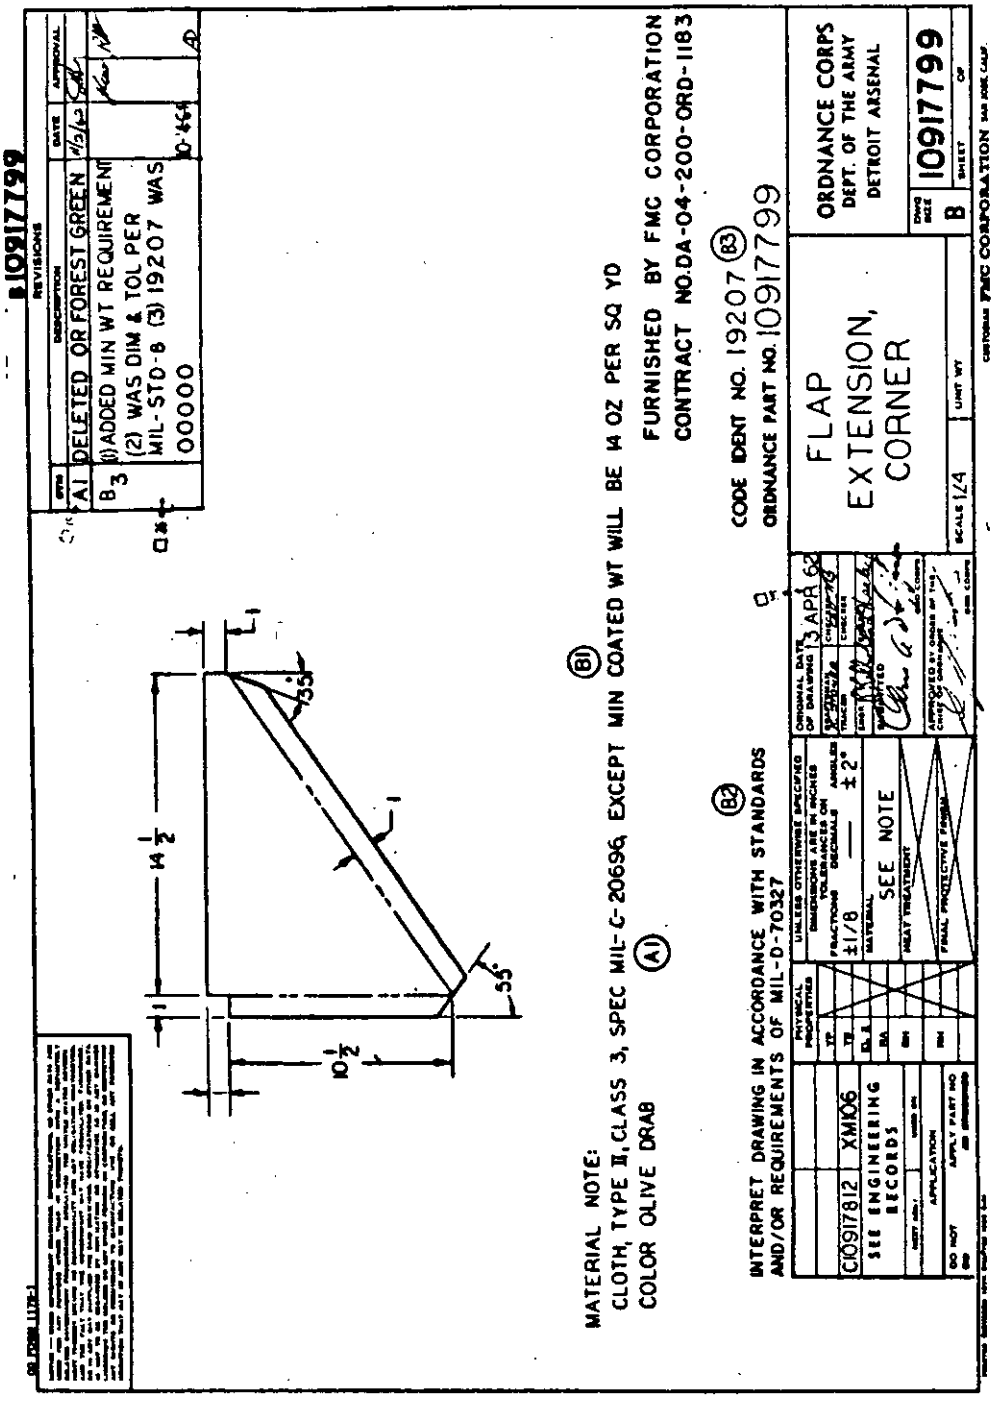


FIGURE 34. FLAP EXTENSION, CORNER.

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:48Z
Check the source to verify that this is the current version before use.

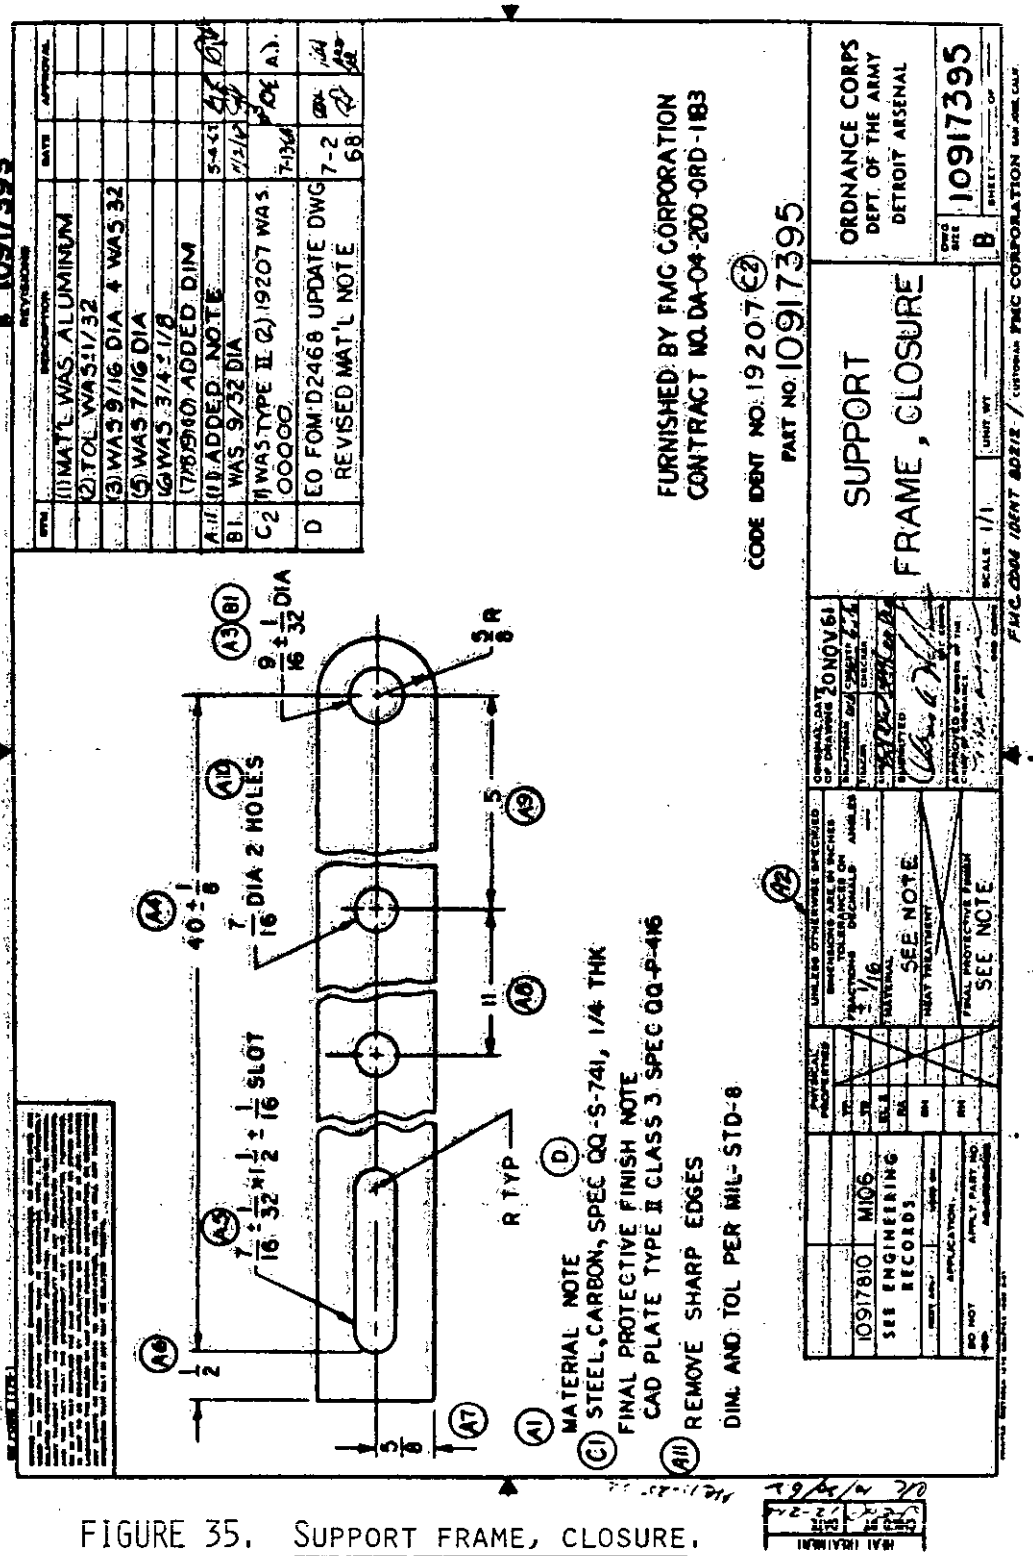


FIGURE 35. SUPPORT FRAME, CLOSURE.

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:48Z
Check the source to verify that this is the current version before use.

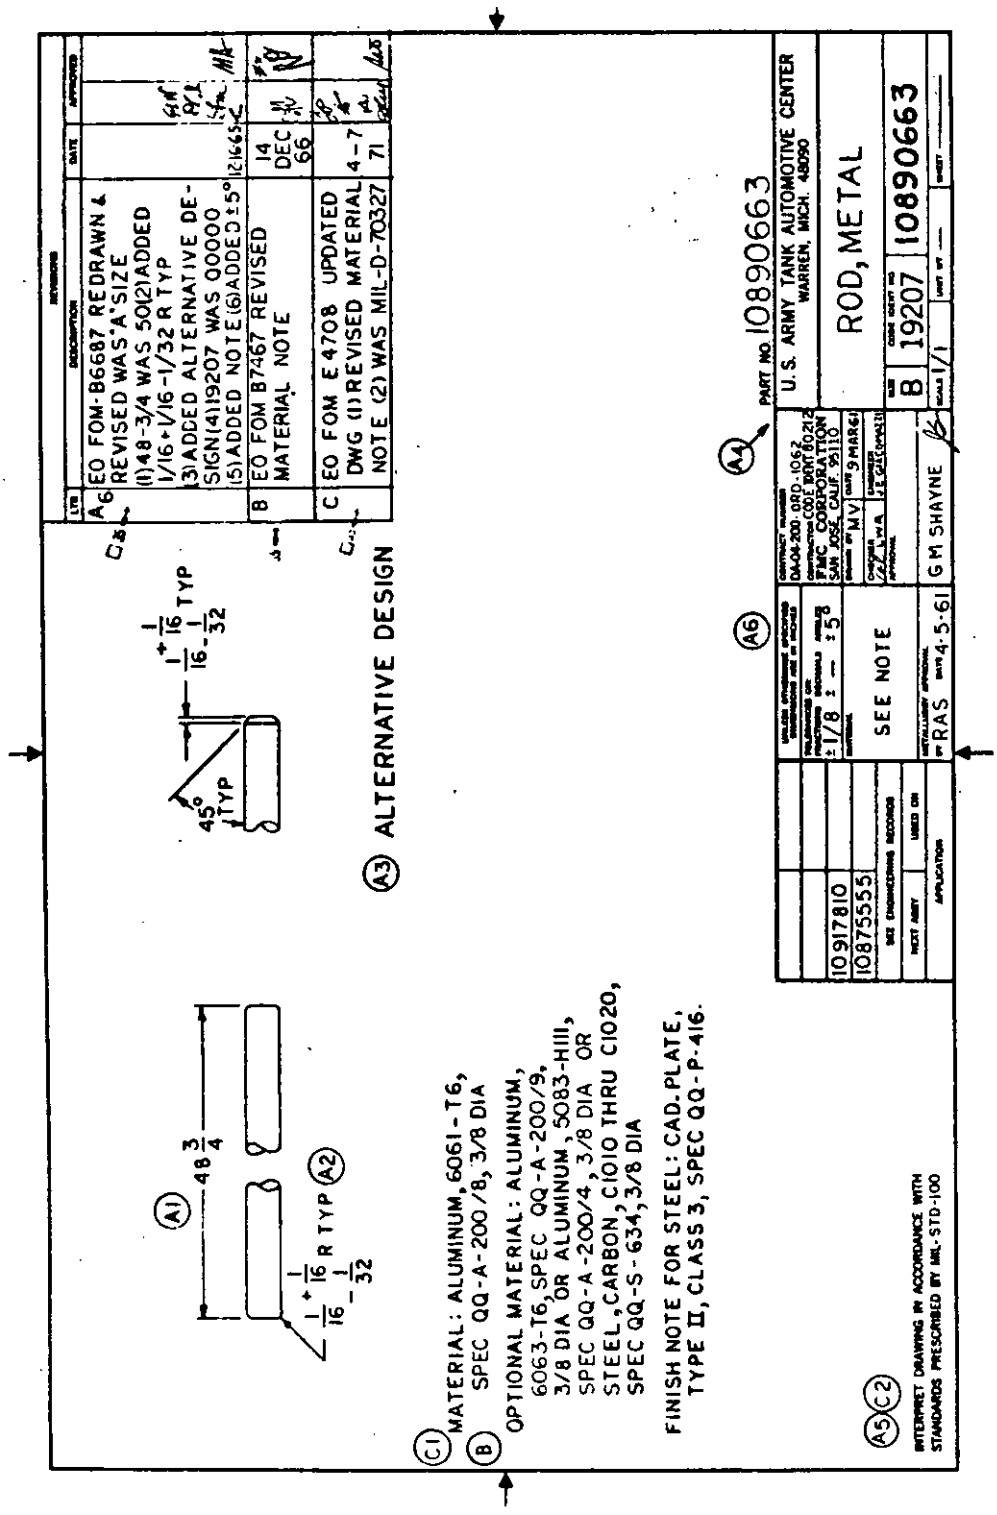


FIGURE 36. ROD, METAL.

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:48Z
Check the source to verify that this is the current version before use.

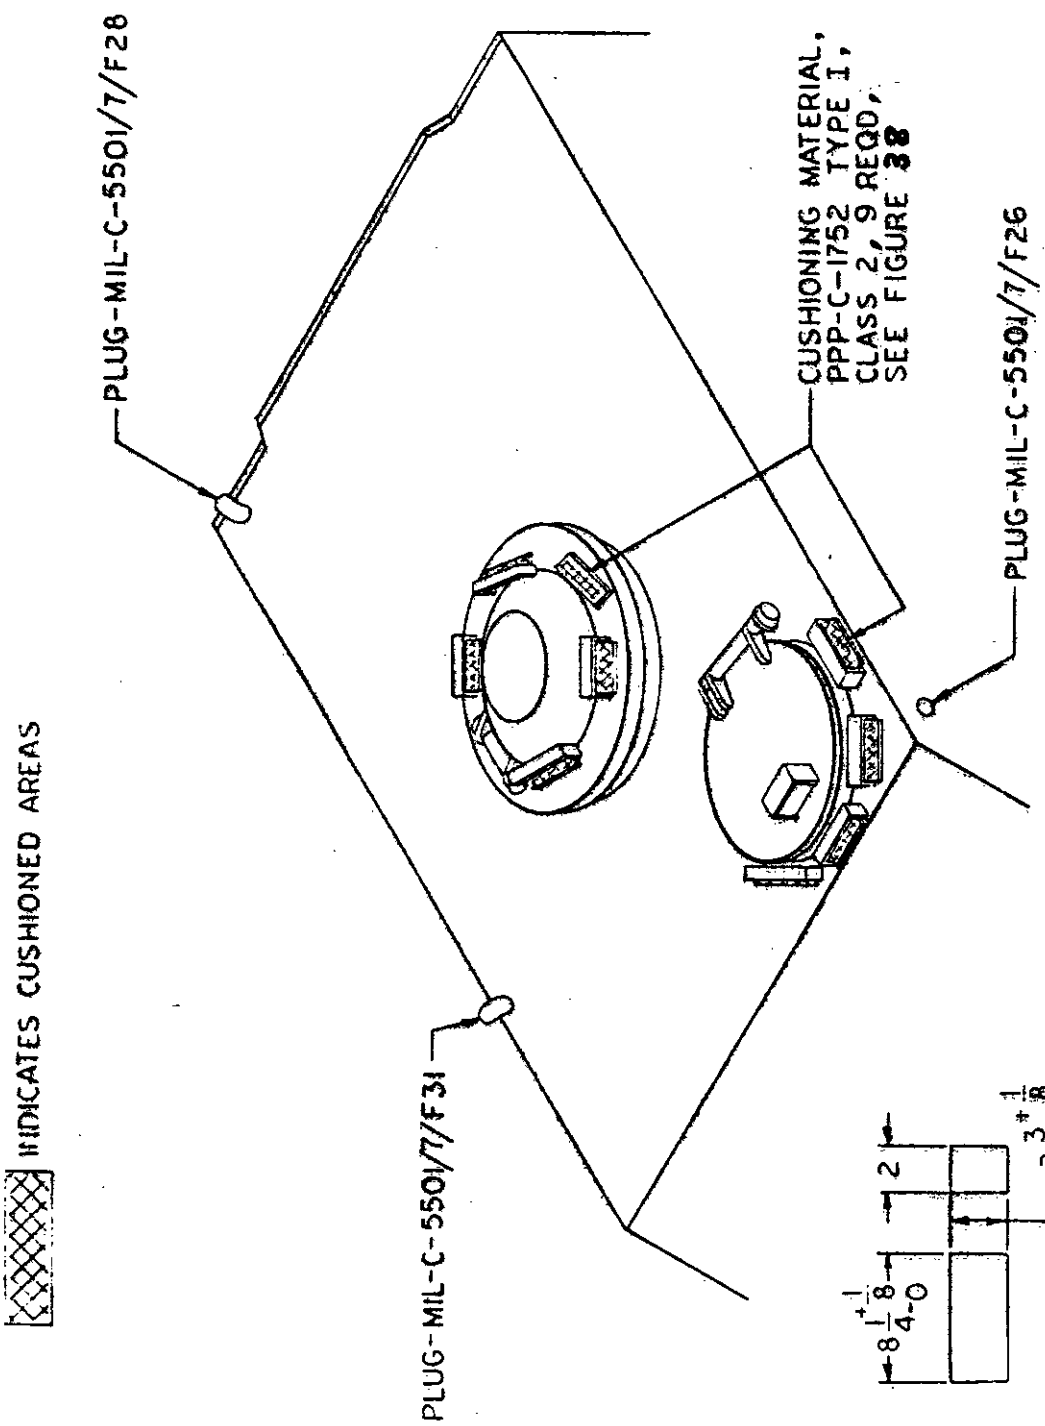


FIGURE 38

FIGURE 37. LEVEL "B" CLOSURES.

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:48Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: *In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge (DO NOT STAPLE), and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document.. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.*

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Materiel Development & Readiness Command
ATTN: DRCDE-I
5001 Eisenhower Avenue
Alexandria, VA 22333

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:48Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:48Z
Check the source to verify that this is the current version before use.