
FED. SUP. CLASS
5950

RATINGS

STYLE	LT4
GRADE	1
CLASS	B
MAXIMUM OPERATING TEMPERATURE	125°C
TEMPERATURE RISE	35°C
AMBIENT TEMPERATURE	90°C
WORKING VOLTAGE	535 VOLTS
TERMINAL PULL	5 POUNDS
ALTITUDE	70,000 FEET

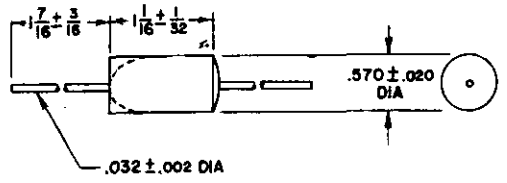

ALL DIMENSIONS IN INCHES

ELECTRICAL CHARACTERISTICS (INITIAL)

Dash No. 1/	Type designation	Replaced MS part no. MS16446 Rev C	Replaced type designation and MS part no. for MS16446 Rev. B: Type designation	Replaced type designation and MS part no. for MS16446 Rev. B: Part No.	Inductance	Q min.	Test frequency	Self-resonant frequency min.	DC resistance max.	Rated dc current 2/
					uh		Mc	Mc	Ohms	ma
- 1	LT4K182	MS16446-1	LT8K088	MS16446- 1	300 ±5%	60	0.79	5.00	3.3	430
- 2	LT4K183	MS16446-2	LT8K089	MS16446- 2	360 ±5%		0.79	4.60	3.6	410
- 3	LT4K184	MS16446-3	LT8K090	MS16446- 3	430 ±5%		0.79	4.20	4.1	385
- 4	LT4K185	MS16446-4	LT8K091	MS16446- 4	500 ±5%		0.79	3.90	4.5	370
- 5	LT4K186	MS16446-5	LT8K092	MS16446- 5	4[illegible]		0.79	3.50	5.1	345
- 6	LT4K187	MS16446-6	LT8K091	MS16446- 6	[illegible]		0.79	3.20	5.7	325
- 7	LT4K188	MS16446-7	LT8K092	MS16446- [illegible]	[illegible]		0.79	3.10	6.0	320
- 8	LT4K189	MS16446-8	LT8K093	MS16446[illegible]	[illegible]	55	0.79	2.90	6.5	305
- 9	LT4K190	MS16446-9	LT8K094	MS1[illegible]	[illegible]	55	0.79	2.70	6.8	300
-10	LT4K191	MS16446-10	---	[illegible]	[illegible]	85	0.25	2.10	7.6	285
-11	LT4K192	MS16446-11	LT8K095	[illegible]	[illegible] ±5%	86	0.25	1.90	8.6	265
-12	LT4K193	MS16446-12	LT8K09[illegible]	[illegible]	2,200 ±5%	72	0.25	1.60	10.5	240
-13	LT4K194	MS16446-13	LT[illegible]	[illegible]	2,400 ±5%	72	0.25	1.50	11.7	230
-14	LT4K195	MS16446-14	[illegible]	[illegible]	3,000 ±5%	70	0.25	1.10	12.5	220
-15	LT4K196	MS16446-15	[illegible]	---	3,600 ±5%	70	0.25	1.05	13.5	210
-16	LT4K197	MS16446-16	[illegible]	---	4,300 ±5%	70	0.25	0.96	15.0	200
-17	LT4K198	MS16446-[illegible]	[illegible]	MS16446-13	5,100 ±5%	70	0.25	0.91	16.5	190
-18	LT4K199	MS16446[illegible]	[illegible]	---	6,200 ±5%	70	0.25	0.84	19.0	180

A CANCEL AFTER 25 AUG 72
NO SUPERCEDING DOCUMENT

1/ The [illegible] to the MS military-standard number constitutes the MS part number; for example MS18131-1.

2/ For the [illegible], the current shall be dc and 1½ times the rated dc current.

ELECTRICAL CHARACTERISTICS (FINAL)

Inspection group	Allowable variation from initial measurement: Inductance	Q	Self-resonant frequency	DC resistance
	Percent	Percent	Percent	Percent
Qualification inspection:				
Group II	2	20	2	2
Group III	2	10	2	2
Acceptance inspection:				
Group B	2	10	2	2
Group C	2	10	2	2

NOTES:
1. THE BAROMETRIC-PRESSURE TEST (TEST-CONDITION LETTER C) IS APPLICABLE.
2. INITIAL INSULATION-RESISTANCE TEST, AND INSULATION-RESISTANCE MEASUREMENTS FOLLOWING OTHER TESTS, ARE APPLICABLE.
3. THE TEMPERATURE-RISE, TERMINAL-TWIST, AND SHOCK (METHOD I, CONDITION C, 50G) TESTS ARE APPLICABLE.
4. THE POLARIZING VOLTAGE DURING THE MOISTURE-RESISTANCE TEST IS APPLIED WITH THE POSITIVE LEAD CONNECTED TO THE COIL TERMINALS TIED TOGETHER, AND THE NEGATIVE LEAD CONNECTED TO THE METAL STRAP.
5. REFERENCED DOCUMENT SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
6. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENT REFERENCED HEREIN
7. VIBRATION-TEST II, TEST CONDITION B, IS APPLICABLE, IN ADDITION UNITS SHALL BE RIGIDLY MOUNTED BY THE BODY.

APPROVED 23 April 1964 REVISED (A) 25 Aug 1972

any standard is approved by the Department of Defense and is ...ry on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. MI Other Cust EL ASD	TITLE COILS, RADIO FREQUENCY, PLASTIC ENCASED, TYPES LT4K182 to LT4K199, INCL.	MILITARY STANDARD MS 18131
PROCUREMENT SPECIFICATION MIL-C-15305	SUPERSEDES: MS16446	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 COORDINATED

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

5960-0434-3

☆ U. S. GOVERNMENT PRINTING OFFICE: 1972 -714-537/1282

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:15Z
Check the source to verify that this is the current version before use.