
REVIEW ACTIVITIES: ARMY-WC, ME; DSA-CS
USER ACTIVITIES: ARMY-MU, AV; NAVY-OS, MC

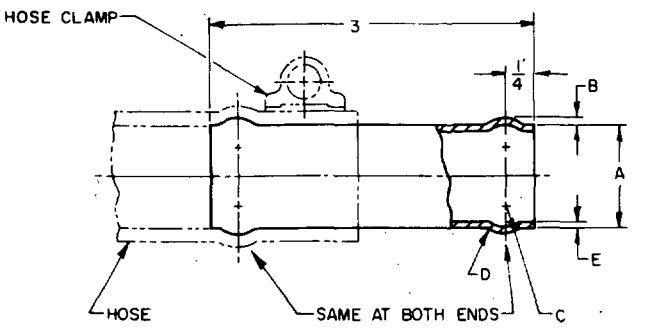

STEEL MS DASH NO.	ALUMINUM MS DASH NO.	HOSE I.D.	A DIA ±.005	B ±.003	C RAD +0 −1/64	D RAD +0 −1/64	E +.002 −.004
1	2	1/4	.250	.038	1/8	1/16	.035
3	4	3/8	.375	.038	1/8	1/16	.035
5	6	1/2	.500	.038	1/8	1/16	.035
7	8	5/8	.625	.038	1/8	1/16	.049
9	10	3/4	.750	.038	1/8	1/16	.049
11	12	1	1.000	.062	5/32	3/32	.049
13	14	1-1/4	1.250	.062	5/32	3/32	.049
15	16	1-1/2	1.500	.072	5/32	3/32	.049

NOTES:

1. MATERIAL: TUBE
   A. STEEL, CORROSION RESISTANT, SEAMLESS OR WELDED, CONDITION A, MIL-T-8606.
   B. ALUMINUM ALLOY 5052, H34, WW-T-700/4.
   OPTIONAL: ALUMINUM ALLOY 6061, T6, WW-T-700/6.
2. PROTECTIVE FINISH: ALUMINUM ONLY, ANODIZE, MIL-A-8625, TYPE I.
3. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE ±1/32 ON FRACTIONS.
4. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS.
5. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
6. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN AS SHOWN HEREON BY DIMENSIONS, NOTATIONS, AND REFERENCED DOCUMENTS.
7. THE MS PART NUMBER SHALL CONSIST OF THE MS NUMBER, PLUS THE DASH NUMBER. EXAMPLE: MS24520-1.
8. MARKING SHALL CONSIST OF THE MS PART NUMBER AND THE MANUFACTURER'S IDENTIFICATION IN ACCORDANCE WITH MIL-STD-130.

Ⓐ ENTIRE STANDARD REVISED

APPROVED 8 MAY 1958 REVISED Ⓐ 27 DECEMBER 1966

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. ARMY-AT Other Cust NAVY-AS AF-69	TITLE MENDER, HOSE (LOW PRESSURE)	MILITARY STANDARD MS24520
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:55Z
Check the source to verify that this is the current version before use.