

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This standard has been approved by the Bureau of Naval Weapons Department of the NAVY and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

FED. SUP CLASS
6125

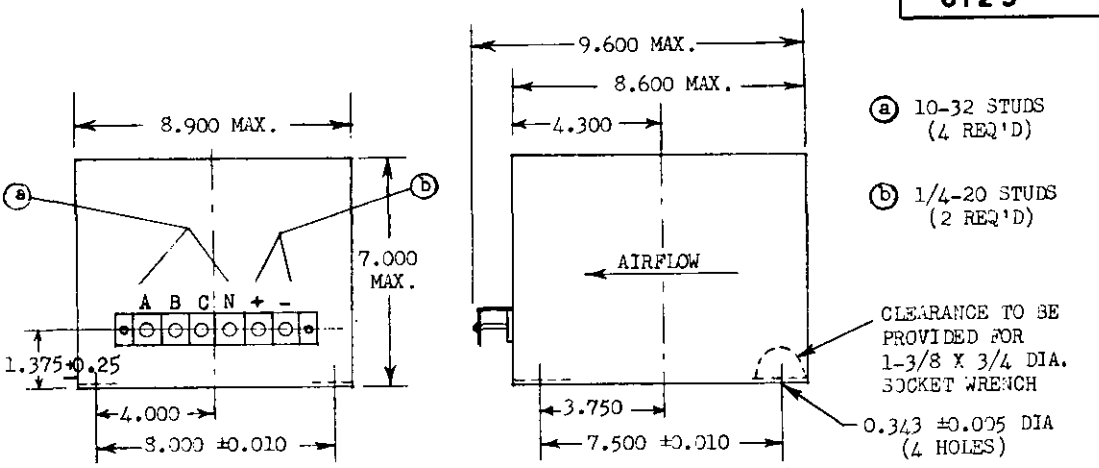

INPUT	
Voltage (Nominal)	115/200 Volts
Frequency (Nominal)	400 c.p.s.
Phase	3
OUTPUT	
Voltage (Nominal)	28 Volts
Current to 60,000 ft. alt.	55 Amp.
EFFICIENCY	
at sea level, 25 ±15°C, half rated load to full load	75% Min.
WEIGHT (lbs.)	12.5 Max.

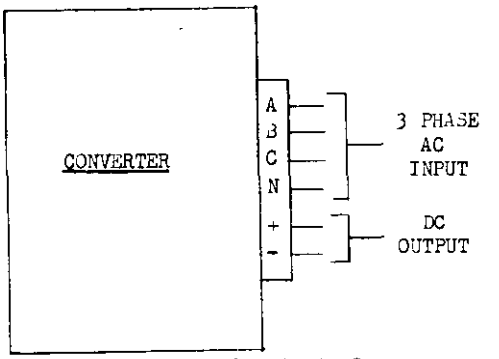

INPUT PHASE ROTATION A, B, C

MS PART NO.
MS-28123-1

For any combination of conditions listed below, the output voltage shall remain within the indicated limits.

Conditions	Output Voltage Limits
Input voltage varied between 109/189 and 120/208 volts and input frequency varied between 380 to 420 cps.	
Load varied from 0 to full load	Low 24V High 31V
The unit shall deliver rated load with the ambient temperature and altitude varied within the range established by Curve I of MS33543(ASG) with the following exceptions: 1. The low temperature limit shall be -65°C throughout the altitude range. 2. The maximum altitude shall be 60,000 ft. and the maximum corresponding temperature shall be +10°C ±5°C.	
Mounted in any position.	

Ⓑ CANCELLED AFTER 30 SEPTEMBER 1982

APPROVED 20 Jul 60 REVISED Ⓐ 20 July 1961 Ⓑ 30 September 1982

P.A.	TITLE	MILITARY STANDARD
NAVY - BUWEPS Other Cust	CONVERTER, 55 AMPERE, CLASS C	MS28123(WEP)
Procurement Specification MIL-C-7115(AER)	SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 SEP 57 672 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202610-23T16:57Z
Check the source to verify that this is the current version before use.