FED. SUP CLASS
5310

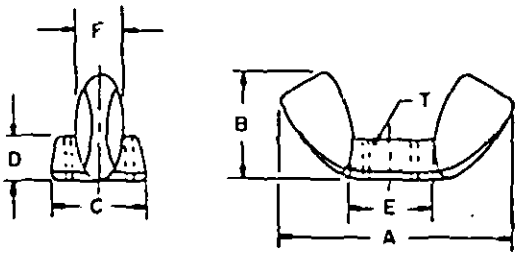


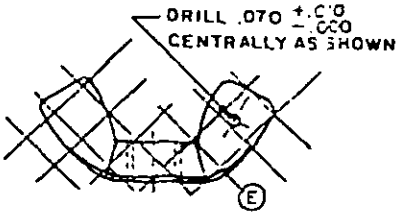


INACTIVE *

Reviewer: AT AV MI IS
User: NE EA MU PA GL WY YD NC

(E)

| DASH NUMBER | | SIZE | MATERIAL | T | DIMENSIONS | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | A | | B | | C | | D | | E | | F | |
| NO HOLE | WITH HOLE | | | | MAX | MIN | MAX | MIN | MAX | MIN | MAX | MIN | MAX | MIN | MAX | MIN |
| -- | 17* | .139 | STEEL | 32UNC-2B | .72 | .59 | .41 | .28 | .33 | .29 | .14 | .10 | .21 | .17 | .11 | .07 |
| -- | 18* | (# 6) | BRASS | | | | | | | | | | | | | |
| 62 | 50* | .138 | STEEL | 32UNC-2B | .91 | .78 | .47 | .34 | .43 | .39 | .18 | .14 | .27 | .22 | .14 | .10 |
| 63 | 51* | (# 6) | BRASS | | | | | | | | | | | | | |
| -- | 19* | .164 | STEEL | 32UNC-2B | .72 | .59 | .41 | .28 | .33 | .29 | .14 | .10 | .21 | .17 | .11 | .07 |
| -- | 20* | (# 8) | BRASS | | | | | | | | | | | | | |
| 66 | 52* | .164 | STEEL | 32UNC-2B | .91 | .78 | .47 | .34 | .43 | .39 | .18 | .14 | .27 | .22 | .14 | .10 |
| 67 | 53* | (# 8) | BRASS | | | | | | | | | | | | | |
| 68 | 37* | .190 | STEEL | 24UNC-2B | .91 | .78 | .47 | .34 | .43 | .39 | .18 | .14 | .27 | .22 | .14 | .10 |
| 69 | 38* | (#10) | BRASS | | | | | | | | | | | | | |
| 70 | 39* | .250 | STEEL | 20UNC-2B | 1.10 | .97 | .57 | .43 | .50 | .45 | .22 | .17 | .39 | .26 | .18 | .14 |
| 71 | 40* | (1/4) | BRASS | | | | | | | | | | | | | |
| 72 | 41* | .3125 | STEEL | 18UNC-2B | 1.25 | 1.12 | .66 | .53 | .58 | .51 | .25 | .20 | .39 | .32 | .21 | .17 |
| 73 | 24* | (5/16) | BRASS | | | | | | | | | | | | | |
| 74 | 42* | .375 | STEEL | 16UNC-2B | 1.44 | 1.31 | .79 | .65 | .70 | .64 | .30 | .26 | .48 | .42 | .24 | .20 |
| 75 | 28* | (3/8) | BRASS | | | | | | | | | | | | | |
| -- | 43* | .4375 | STEEL | 14UNC-2B | 1.94 | 1.81 | 1.00 | .87 | .93 | .86 | .39 | .35 | .65 | .54 | .33 | .26 |
| -- | 32* | (7/16) | BRASS | | | | | | | | | | | | | |
| 78 | 44* | .500 | STEEL | 13UNC-2B | 1.94 | 1.81 | 1.00 | .87 | .93 | .86 | .39 | .35 | .65 | .54 | .33 | .26 |
| 79 | 36* | (1/2) | BRASS | | | | | | | | | | | | | |

(E) *WING NUTS WITH HOLE IN WING ARE INACTIVE FOR DESIGN AFTER 14 March 1977.

NOTES:

1. TYPE: Cold forged (Type A, Style I of procurement specification).
2. MATERIAL: Steel, carbon, 60,000 PSI tensile strength; Brass, commercial.
3. PROTECTIVE COATING: Steel nuts are cadmium plated, specification QQ-P-416, Type II, Class 3.
4. THREADS: The threads shall be in accordance with Screw-Thread Standards for Federal Services, Handbook H-28.
5. Referenced documents of issue in effect on date of invitation for bids shall apply.
6. In case of conflict with any referenced document, this standard will govern.
7. The MS part number consists of the MS sheet number, plus the dash number.
   Example: MS35425-62.
8. All dimensions are in inches.

INTERCHANGEABILITY RELATIONSHIP WITH AN350 - After 3 February 1965, NC threaded wing nuts of AN350 are inactive for new design and replacement. The existing stocks should be used until depleted. For new design and replacement use only applicable superseding wing nuts listed above.

APPROVED 22 NOV 54' REVISED (A) 8 JUNE 61 (B) 3 FEB 65 (C) 19 MAY 66 (D) 14 MAY 78 (E) 14 MARCH 77

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

| | | |
|---|---|---|
| P.A. WC<br>Cstm Cust 99<br>(E) | TITLE<br>NUT, PLAIN, WING, UNC-2B | MILITARY STANDARD<br>MS 35425 |
| PROCUREMENT SPECIFICATION<br>FF-N-845 | SUPERSEDES AN350 in part, BBPI1, BBPI3.1, BBPI2 and BBPI3 in part. | SHEET 1 OF ; |

DD FORM 672-1 (Coordinated)

5310-0935

Source: https://assist.dla.mil -- Downloaded: 202640-23T17:23Z
Check the source to verify that this is the current version before use.