

This document has been promulgated by the Department of Defense as the military standard to limit the selection of the item, product or design covered herein in engineering, design and procurement. This standard shall become effective not later than 90 days after the latest date of approval shown.

FED SUP CLASS
5940

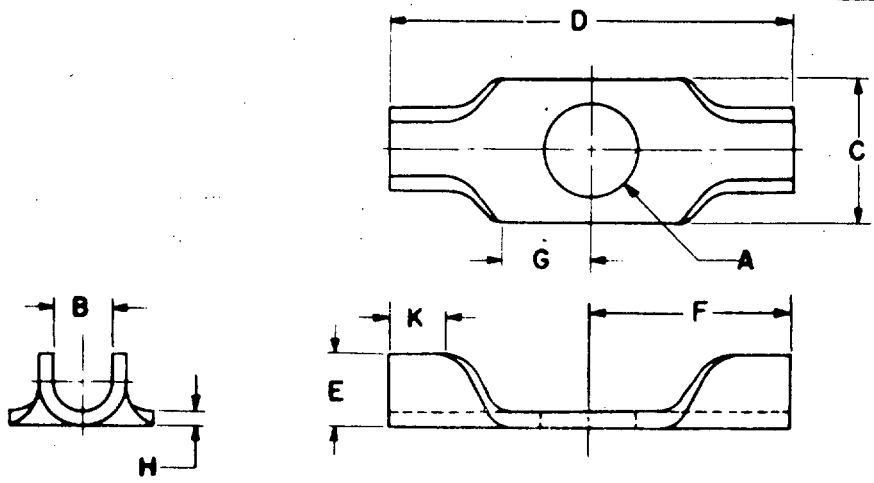

DASH NO.	FIIN	WIRE SIZE AWG NOM	STUD SIZE	A HOLE DIA MIN	A HOLE DIA MAX	B	C	D	E	F	G	H ±.003	K
1	151-9366	8	10	.193	.205	1/8	5/16	7/8	3/16	7/16	3/16	.032	1/8

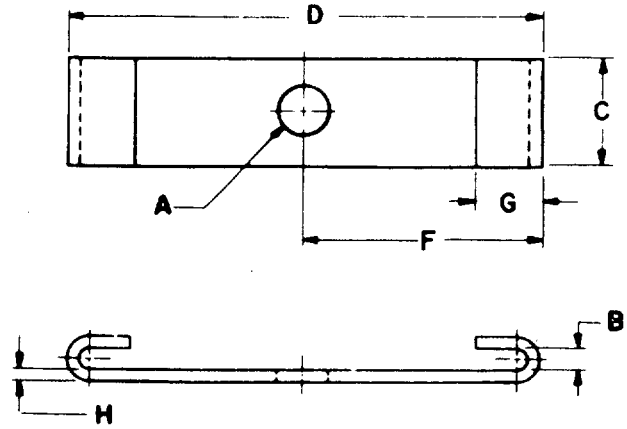

DASH NO.	FIIN	WIRE SIZE AWG NOM	STUD SIZE	A HOLE DIA MIN	A HOLE DIA MAX	B	C	D	F	G	H ±.003
2	151-9374	16	6	.141	.153	1/16	5/16	1 3/8	1 1/16	3/16	.032

MATERIAL: COPPER, ANNEALED - SPECIFICATION QQ-C-576

FINISH: HOT TIN DIP OR ELECTRODEPOSITED TIN ALL OVER, MINIMUM THICKNESS .0005 INCHES.

NOTES: 1. ALL DIMENSIONS IN INCHES. TOLERANCES: FRACTIONAL ± 1/64 UNLESS OTHERWISE SPECIFIED.

2. REMOVE ALL BURRS.

3. REFERENCED DOCUMENTS OF ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS SHALL APPLY.

4. THE MS PART NUMBER CONSISTS OF THE MS NUMBER PLUS THE DASH NUMBER.

REVISED A 23 JULY 56

APPROVED 5 July 55

CUSTODIANS	OTHER INT.
ORD SHIPS USAF	Sig TE A Or Y

MILITARY STANDARD

TERMINAL, LUG, SOLDER TYPE, COPPER STAMPING, ONE HOLE, CENTER MOUNTING

MS35433

GOVERNMENT SPECIFICATIONS: MIL-T-15659

REFERENCES:

SHEET 1 OF 1

DD FORM 1 OCT 62 672-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:23Z
Check the source to verify that this is the current version before use.