USER ACTIVITIES:
ARMY- EL, ME
NAVY- YD

REVIEW ACTIVITIES:
ARMY- AV, MI
NAVY- AS
AIR FORCE- 82
DSA- GS

FED SUP CLASS
6240

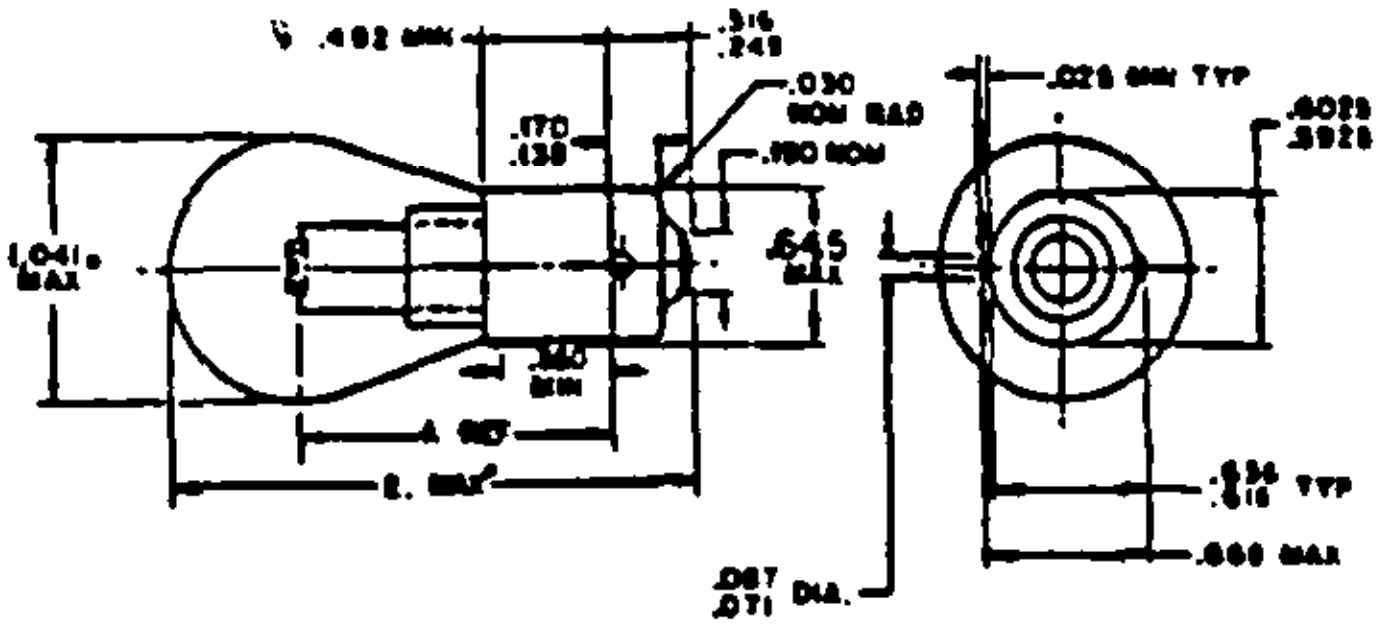

INCHES	MM
.025	.64
.030	.76
.071	1.80
.087	2.21
.136	3.45
.170	4.32
.190	4.83
.249	6.32
.316	8.03
.350	8.89
.492	12.50
.5925	15.05
.6025	15.30
.636	16.15
.661	16.79
.645	16.38
.665	16.89
1.041	26.44
1.125	28.58
1.188	30.18
1.250	31.75
2.000	50.80

MS PART NUMBER ⑥	CANDLE POWER	DESIGN		LIGHT CENTER LENGTH A	FILAMENT CONST	FILAMENT CONST (OPTIONAL)	AVERAGE LIFE (HOURS)
		VOLTS	AMPS				
MS35478-1129	21±7%	6.40	2.63±6%	1.250	C-6		300
MS35478-87	15±9%	6.75	1.91±5%	1.125	C-2R	C-6	300
MS35478-93	15±9%	12.80	1.04±6%	1.125	C-2R	C-6	700
MS35478-1141	21±10%	12.80	1.44±6%	1.250	C-6		1000
MS35478-305	15±15%	28.00	.51±6%	1.125	C-2V		300
MS35478-307	21±15%	28.00	.67±6%	1.125	C-2V		300
MS35478-307 SB Ⓒ	21±15% Ⓒ	28.00	.67±6%	1.125	C-2V		300
MS35478-307 R Ⓒ	21±15% Ⓒ	28.00	.67±6%	1.125	C-2V		300
MS35478-315 ⑦	32±10%	28.00	.90±6%	1.125	C-2V		300
MS35478-1683	32±15%	28.00	1.02±6%	1.250	2C-2F	2C-6	500
MS35478-1691	15±10%	28.00	.61±6%	1.125	2C-2R	2C-2V	1000
MS35478-1665 ⑦	32±10%	6.00	4.10±6%	1.250	C-6		300
MS35478-1073	32±10%	12.80	1.80±5%	1.250	C-6		200
MS35478-1683 IT	21±15%	28.00	.90±6%	1.125	C-2V		1000
MS35478-2232	18±15%	28.00	.645±10%	1.188	CC-6		2000
MS35478-2233	21±25%	28.00	.764±10%	1.188	CC-6		2000
MS35478-BFT	32	4	.75	1.25	C-6		50
Ⓚ MS35-78-3605	21 APPROX	6.4	2.69	1.25	C-2V		200

NOTES:

1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
4. This standard is not intended to limit construction to feature other than as shown hereon by dimensions, notations, and referenced documents.
5. Referenced documents shall be of the issue in effect on date of invitations for bid.
6. MS part numbers correlate with lamp industry trade numbers.
7. To obtain satisfactory life, lamps must be operated in horizontal position only.
8. All coatings on lamps shall firmly adhere, be uniform throughout, and shall not discolor, crack, fade, or peel.

Red:	The coloring shall be red, in accordance with MIL-C-25050 at the rated voltage, when first turned on and at stabilized operating temperature.
Reflectorized coating:	Top of bulb to the filament center shall be sensitized to receive a .005 (.13 mm) coating of pure silver, followed by a protective copper deposit, and then overlapping aluminum flakes, as an optional procedure, the reflectorized coating may be aluminized by vacuum deposition.

9. Candle power for lamps -307 SB and -307 R applies to lamps before red or reflectorized coating is applied.

Certain provisions of this standard, identified by an asterisk (*) are the subject of international standardization agreement, NATO, STANAG 4008, and ABC-ARMY-STD-122, when revision or cancellation of this standard is proposed which will affect or violate the international agreement concerned, the preparing activity will take appropriate reconciliation action through international standardization channels, including departmental standardization offices, if required.

APPROVED 1 MAY 1961 REVISED (J) 30 JUNE 1976 (K) 29 JUNE 1977

[illegible]

P.A. ARMY-AT
Other Cust
NAVY-SH
AF-11

PROCUREMENT SPECIFICATION
W-L-111

TITLE
LAMP, INCANDESCENT, S-8
BULB, SINGLE CONTACT, BAYONET
CANDELABRA BASE

MILITARY STANDARD
MS 35478

SUPERSEDES
MS 25232 (ASG), MS 0035478 (USAF), MS15566 (SHIPS)

SHEET 1 OF 1

DD FORM 672-1 (Continued)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

6240-0318

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:24Z
Check the source to verify that this is the current version before use.