FED. SUP CLASS 5315

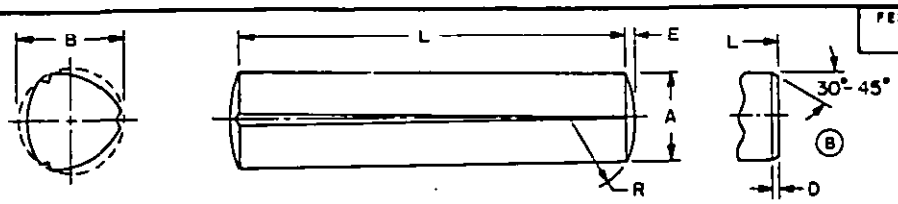

NOMINAL SIZE		.0469	.0625	.0781	.0938
A DIAMETER	MAX	.0469	.0625	.0781	.0938
	MIN	.0459	.0615	.0771	.0928
D CHAMFER LENGTH* (B)	MIN	----	.016	.016	.016
E CROWN HEIGHT*	REF	----	.006	.009	.009
R RADIUS	±.010	----	.078	.094	.125
RECOMMENDED HOLE SIZE	MAX	.0482	.0640	.0798	.0956
	MIN	.0469	.0625	.0781	.0938
SINGLE SHEAR STRENGTH	LBS-MIN	150	270	430	620

L LENGTH ±.010 (B)	DASH NO.	B DIA ±.001	DASH NO.	B DIA ±.001	DASH NO.	B DIA ±.001	DASH NO.	B DIA ±.001
.188	1	.050						
.250	2	.050	6	.066	11	.082		
.375	3	.050	7	.066	12	.082	16	.099
.500	4	.050	8	.066	13	.082	17	.099
.625	5	.050	9	.066	14	.082	18	.099
.750			10	.066	15	.082	19	.099
1.000							20	.099

NOMINAL SIZE		.125	.1562	.1875	.250
A DIAMETER	MAX	.1250	.1562	.1875	.2500
	MIN	.1230	.1542	.1855	.2480
D CHAMFER LENGTH* (B)	MIN	.016	.031	.031	.031
E CROWN HEIGHT*	REF	.013	.017	.018	.026
R RADIUS	±.010	.156	.188	.250	.312
RECOMMENDED HOLE SIZE	MAX	.1271	.1587	.1903	.2534
	MIN	.1250	.1562	.1875	.2500
SINGLE SHEAR STRENGTH	LBS-MIN	1100	1720	2480	4420

L LENGTH ±.010 (B)	DASH NO.	B DIA ±.002	DASH NO.	B DIA ±.002	DASH NO.	B DIA ±.002	DASH NO.	B DIA ±.002
.500	21	.132	27	.164				
.625	22	.132	28	.164	33	.195	41	.260
.750	23	.132	29	.164	34	.195	42	.260
1.000	24	.131	30	.163	35	.195	43	.260
1.250	25	.130	31	.162	36	.194	44	.260
1.500	26	.130	32	.162	37	.194	45	.259
1.750					38	.194	46	.259
2.000					39	.193	47	.259
2.250					40	.193	48	.259
2.500							49	.258
2.750							50	.258

NOTES:
(B) 1. MATERIAL: Corrosion-resisting steel, 300 series, in accordance with Fed. Std. No. 66. The minimum ultimate shear strength shall be 90,000 PSI.
2. PROTECTIVE COATING: Passivated in accordance with QQ-P-35.
3. DIMENSIONS: All dimensions are in inches, unless otherwise specified.
4. APPLICATION: Grooved pins are locked securely in place by elastic deformation, eliminating the need for tapping or reaming of tapered or sized holes.
5. PART NUMBER: The MS part number consists of the MS number, plus the dash number. Example: MS35672-1.
6. Diameter "B" is the expanded diameter as measured with a ring gage.
*7. Ends may be crowned or chamfered or may be square with .01 to .02 radius on the edges.
8. Referenced documents shall be of the issue in effect on date of invitations for bid.
9. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

REVIEWER: AV, EA, IS, MI, NS
USER: AT, CL, MC, ME, MU, WV

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 11 JAN 1956 REVISED (A) 17 MAR 1965 (B) 22 AUG 1975

P.A. WC Other Cust AS 82	TITLE PIN, GROOVED, HEADLESS-LONGITUDINAL TAPER GROOVE, CORROSION-RESISTING STEEL	MILITARY STANDARD MS35672
PROCUREMENT SPECIFICATION MIL-P-20700	SUPERSEDES: AEGX2 in part	SHEET 1 OF 1

DD FORM 1 JAN 72 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

☆U.S. GOVERNMENT PRINTING OFFICE: 1977—703-020/5025

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:26Z
Check the source to verify that this is the current version before use.