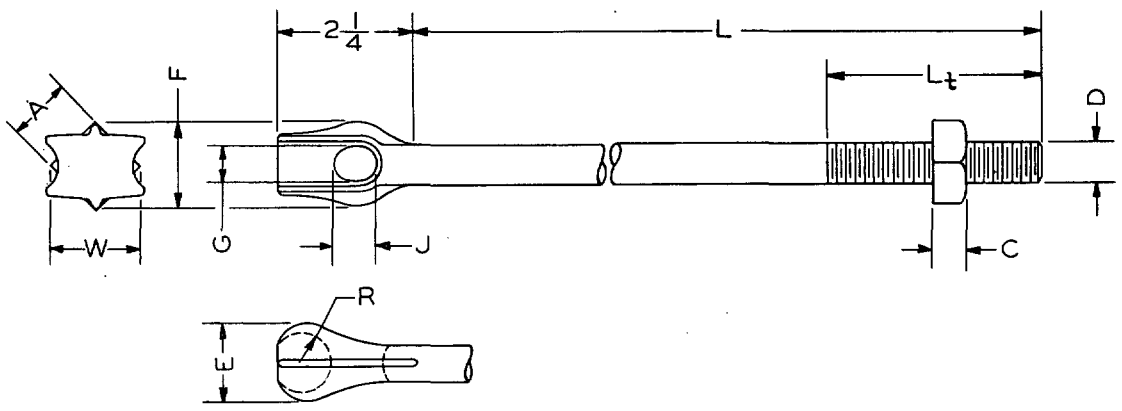


DASH NO.	DIMENSIONS										
	D	L	L_t MIN	W	A	C	E	F	G	J	R
-1	5/8-11	8	4	1-7/16	1	35/64	1 1/2	1 11/16	9/16	11/16	11/16
-2	5/8-11	10	4	1-7/16	1	35/64	1 1/2	1 11/16	9/16	11/16	11/16
-3	5/8-11	12	6	1-7/16	1	35/64	1 1/2	1 11/16	9/16	11/16	11/16
-4	5/8-11	14	6	1-7/16	1	35/64	1 1/2	1 11/16	9/16	11/16	11/16
-5	3/4-10	10	4	1-19/32	1 1/8	21/32	1 5/8	1 7/8	11/16	13/16	3/4
-6	3/4-10	12	6	1-19/32	1 1/8	21/32	1 5/8	1 7/8	11/16	13/16	3/4
-7	3/4-10	14	6	1-19/32	1 1/8	21/32	1 5/8	1 7/8	11/16	13/16	3/4

5/8 inch diameter bolts shall develop a minimum tensile strength of 12,500 pounds.

3/4 inch diameter bolts shall develop a minimum tensile strength of 18,500 pounds.

NOTES:

1. REFERENCE DOCUMENTS - ISSUE IN EFFECT ON THE DATE OF INVITATION FOR BID APPLY.
2. THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
3. (A1) MATERIALS, FINISH AND SCREW THREADS SHALL BE IN ACCORDANCE WITH EDISON ELECTRIC INSTITUTE SPECIFICATION TD-4.

APPROVED 19 NOV 56 REVISED (A) 10 August 1967

ALL DIMENSIONS IN INCHES

P.A. EL Other Cust YD 69	TITLE BOLT, THIMBLE EYE (STRAIGHT), HOT GALVANIZED (POLE-LINE)	MILITARY STANDARD MS 35796
PROCUREMENT SPECIFICATION MIL-H-55053	SUPERSEDES:	

Reviewer/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on information in the current DOEISS(FSC listing)
ARMY: ME@ GL+ WC+ EL+ NAVY: MC@ YD+ AIR FORCE: 69+

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:28Z
Check the source to verify that this is the current version before use.