
FED. SUP CLASS
6640

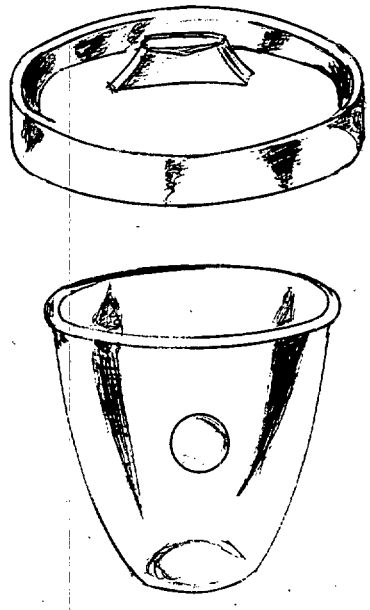

PART NUMBER	CAPACITY ml
MS35968-1	30
MS35968-2	50

MATERIAL: Acid-leached glass of 96 percent minimum silica content with a thermal coefficient of expansion of 0.00000075 cm/cm/deg C. Glass shall have a normal working temperature of 900 deg C and extreme working temperature of 1200 deg C and a minimum softening point of 1530 deg C.

DESIGN: The crucible shall be cup-shaped with flat bottom and sloping sides. A marking area with a matte finish shall be provided.

The cover shall fit over the outside diameter of the crucible and have a handle centered on top.

NOTE: Items differing from this Military Standard by minor variations in design or dimensions are considered standard under this document, provided such variations do not affect performance and are not in conflict with the material requirements as specified herein.

☆U.S. GOVERNMENT PRINTING OFFICE — 1981: 703-023/875

APPROVED 29 Sep 1959 REVISED A 9 Nov 1967 (B) 21 JAN 1981

USER ACTIVITIES: ARMY - CE

REVIEWER ACTIVITIES: ARMY - ME, MD
AIR FORCE - 99

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

(B) ENTIRE STANDARD REVISED

P.A.	EA	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust	MS 99		CRUCIBLE, IGNITION, LABORATORY acid-leached glass, with tongue-type cover	MS MS35968
Procurement Specifications NONE		SUPERSEDES:		SHEET 1 OF 1

Project Number 6640-0321

DD FORM 1 MAY 73 672 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE DATE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:32Z
Check the source to verify that this is the current version before use.