
FED. SUP CLASS
6640

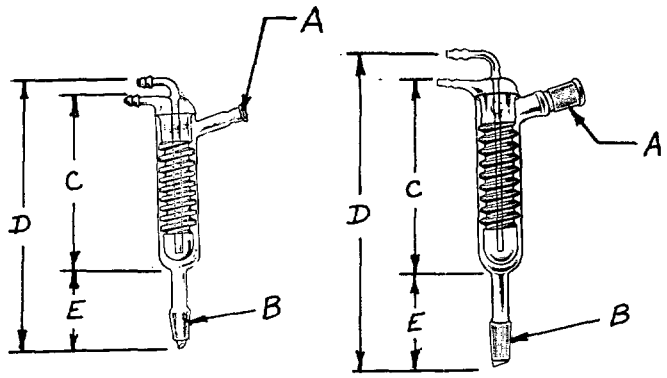

MS36263-1 MS36263-2

PART NUMBER	APPROXIMATE DIMENSIONS (MM)				
	A JOINT SIZE	B INNER ⅀ JOINT	C LENGTH	D LENGTH	E LENGTH
MS36263-1	No. 3 Rubber Stopper	24/40	225	335	90
MS36263-2	24/40	24/40	225	335	90

MATERIAL: Borosilicate glass in accordance with ASTM E438, Type I, Class A.

DESIGN: Condensers shall be of the Friedrichs type with standard taper-ground joints in accordance with Commercial Standard CS21-58, published by the National Bureau of Standards. Inlet and outlet rubber tubing water connections at the top and side.

The vapor tube shall be sealed to the jacket at at angle of approximately 75°. The helical inner tube fits closely within the jacket.

NOTES:
1. Items differing from this Military Standard by minor variations in design or dimensions are considered standard under this document, provided such variations do not affect performance and are not in conflict with the material requirements specified herein.
2. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
3. Referenced documents shall be of the issue in effect on date of invitations for bid.
4. FSCM: 14674 and 84116.

© ENTIRE STANDARD REVISED

APPROVED 15 Dec 1961 REVISED (A) 12 March 1969 (B) 10 May 1974 (C) 16 JAN 1984

USER ACTIVITIES: ARMY - DM, MD
NAVY - MS

REVIEWER ACTIVITIES: ARMY - ME
AIR FORCE - 82

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. EA	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust MS 99		CONDENSERS, LABORATORY, FRIEDRICHS TYPE	MS36263
Procurement Specifications NNN-E-920	SUPERSEDES:		SHEET 1 OF 1

DD FORM 1 MAY 73 672 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE PROJECT NUMBER 6640-1210

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:37Z
Check the source to verify that this is the current version before use.