

FED. SUP CLASS
3805

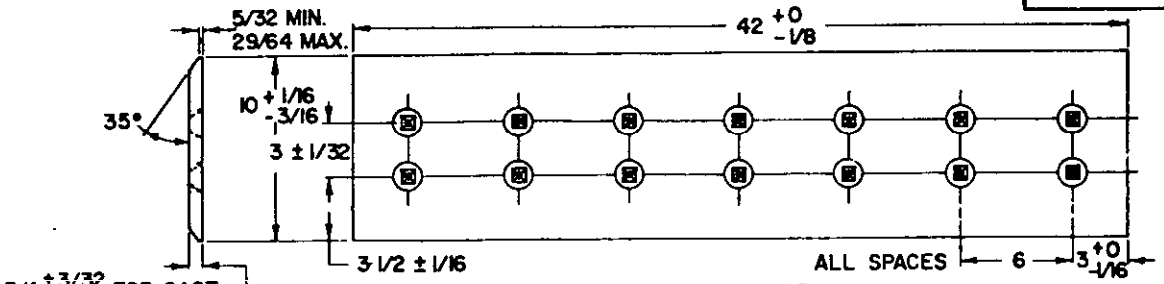

CENTER EDGE

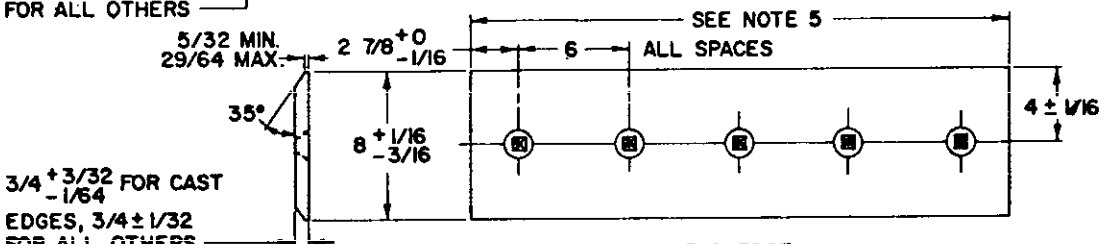

END EDGE

PHYSICAL PROPERTIES HEAT TREATED CUTTING EDGES
ALL EXCEPT CASTINGS:
1.5 MIN WIDTH RC 45 TO RC 52 RC 20 TO RC 52 CORE RC 20 TO RC 40 3/32 MIN. RC 20 TO RC 52
CAST EDGES: SURFACE HARDNESS RC 45 TO RC 52 CORE HARDNESS RC 45 TO RC 52 MIN IMPACT VALUE 15 FT-LBS CHARPY V-NOTCH AT 65°F TO 85°F

CENTER EDGE

PHYSICAL PROPERTIES HEAT TREATED CUTTING EDGES
ALL EXCEPT CASTINGS:
1.2 MIN WIDTH RC 45 TO RC 52 RC 20 TO RC 52 CORE RC 20 TO RC 40 3/32 MIN. RC 20 TO RC 52
CAST EDGES: SURFACE HARDNESS RC 45 TO RC 52 CORE HARDNESS RC 45 TO RC 52 MIN IMPACT VALUE 15 FT-LBS CHARPY V-NOTCH AT 65°F TO 85°F

END EDGE

NOTES:

1. MATERIAL: STEEL
2. FLAME CUTTING TO WIDTH OR FI[illegible] RMITTED.
3. HOLES SHALL BE [illegible] ACCORDAN[illegible] ED[illegible] LOW BOLT HEAD IN [illegible]ES FOR CUTTING
5. [illegible] PROCUREMENT.
6. [illegible]HES.
7. [illegible] MILL ROLLING TOLERANCES WILL APPLY ON FLATNESS, CAMBER, AND [illegible]EL ANGLES.
8. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

Ⓐ CANCELED AFTER 3 February 1983

No superseding standard

Ⓐ TRUE POSITION CIRCLE.

☆ U. S. GOVERNMENT PRINTING OFFICE: 1968-341-511/A-1463

APPROVED 15 AUG 1968 REVISED Ⓐ 3 February 1983

Review activities:
User activities: MC, YD

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. ARMY-ME Other Cust AIR FORCE-84	TITLE CUTTING EDGE, BOWL, SCRAPER, 7-1/2 CUBIC YARD.	MILITARY STANDARD MS 39328
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 APR 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:51Z
Check the source to verify that this is the current version before use.