FED. SUP CLASS
4730

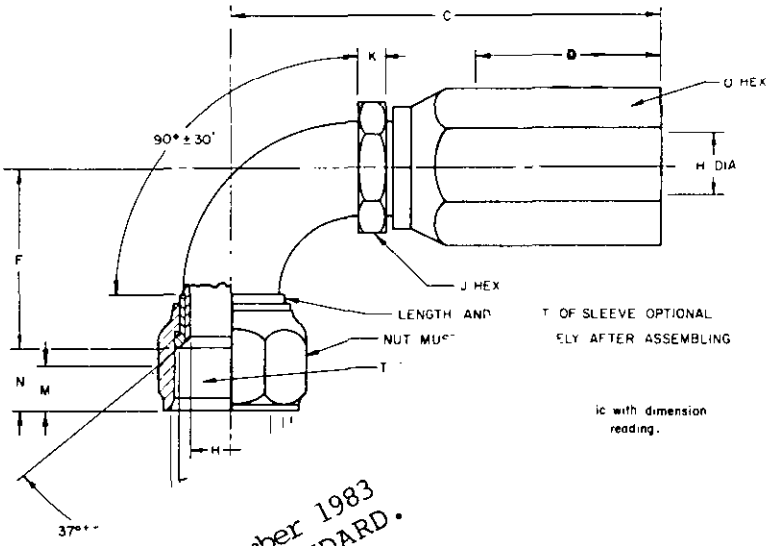

ic with dimension reading.

CANCELLED 6 December 1983
NO SUPERSEDING STANDARD.

User activities:
Army - MU, WC
Air Force - 99

Review activities:
Army - GL
DSA - CS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

.op elbows.

Size (Nomin.	ch.	M Min.	N Min.	O Max.	P Dia.	S Dia.	T CL-2B
1-1/4	2.00	0.41	0.56	0.64	2.25	1.41	1.53	1-5/8 -20
1-1/2	2.25	0.41	0.66	0.77	2.63	1.63	1.78	1-7/8 -20

TABLE II. Maximun. ..t elbows.

Hose O.D. Ref.	-1/4	1-1/2
Pressure	3000	2500

TABLE III. Over-tightening torque for swivel nut.

Dash No.	Norm. Tube O.D. Ref.	Torque (inch pounds) Min.	Max.
-20	1-1/4	1900	2100
-24	1-1/2	2700	3000

NOTES:
1. Material shall be steel or malleable iron.
2. The elbows shall be zinc plated in accordance with QQ-Z-325, Type II, Class 3, or cadmium plated in accordance with QQ-P-416, Class 3, Type II, except the embrittlement check need not be run.
3. Threads shall be in accordance with NBS Handbook H-28, except threads that grip the hose (if used) are optional.
4. Swivel nut method of fabrication and assembly is optional.
5. All dimensions are in inches.
6. Marking shall include the manufacturer's name or trade mark, the size of the elbow, and the letters "R-X".
7. Pressures are in pounds per square inch.
8. Proof pressure shall be that pressure which is equal to twice the maximum working pressure (working pressure X2).
9. Burst pressure shall be that pressure which is not less than four times the maximum working pressure (working pressure X4).
10. Elbows are for use with four spiral light wire reinforcement hose conforming to MIL-H-52471, Type E.
11. Installation designs shall provide for the maximum elbow dimensions specified for the size and type.
12. The MS part number consists of the MS sheet number, plus the dash numbers. Example: MS -20 -20. The MS indicates a 90° short drop elbow with swivel nut. The -20 indicates the nominal termination size (in increments of 1/16 inch). The next -20 indicates the hose size 1-1/4 inch.
13. Reference documents shall be of the issue in effect on date of invitation for bids or request for proposal.
14. For design feature purposes this standard takes precedence over procurement documents referenced herein.

APPROVED 4 NOVEMBER 1976 REVISED Ⓐ 6 December 1983

P.A. ME
Other Cust

TITLE: Elbow, tube to hose, field attachable (reusable), hydraulic, screw-on, pressure type, female, swivel, 37° flare, 90° bend, short drop, four spiral light wire reinforcement hose

MILITARY STANDARD
MS 39359

PROCUREMENT SPECIFICATIONS: MIL-A-52525

SUPERSEDES:

PAGE 1 OF 1

DD FORM 1 SEP 57 672-1

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

4730-0475

Source: https://assist.dla.mil -- Downloaded: 202610-23T17:52Z
Check the source to verify that this is the current version before use.