

FED. SUP CLASS
2640

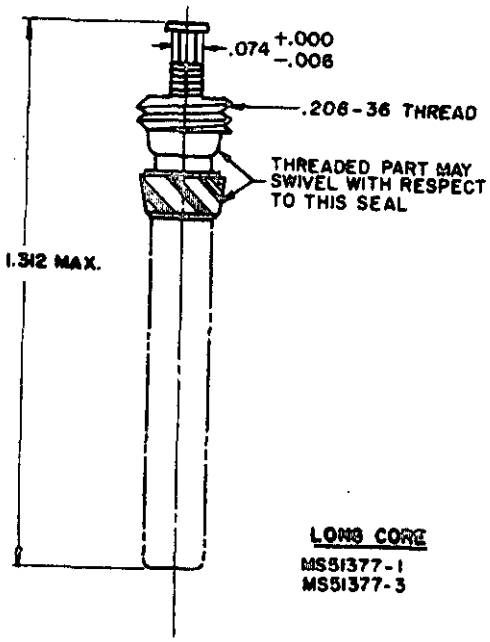

LONG CORE
MS51377-1
MS51377-3

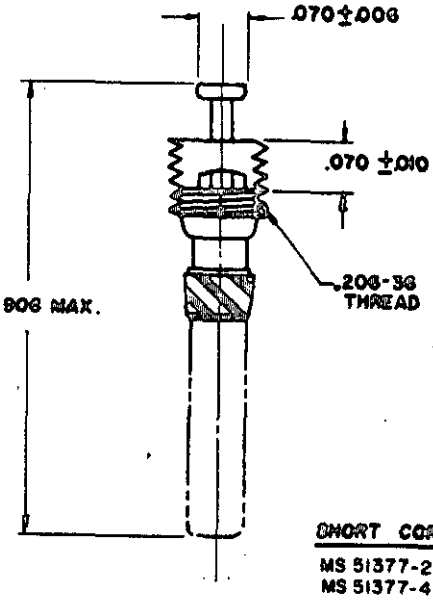

SHORT CORE
MS 51377-2
MS 51377-4

REVIEW ACTIVITY: DSA-CS
USER ACTIVITIES: ARMY-AV, ME; NAVY-AS

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 23 MARCH 1961 REVISED (A) 28 JUNE 1963 (B) 29 JULY 1965 (C) 5 MAY 1969 (D) 28 JUNE 1976

TYPE V, CLASSES 1 AND 3 – VALVE CORE – STANDARD BORE OF PROCUREMENT SPECIFICATION
(TIRE AND RIM ASSOCIATION NUMBERS FOR IDENTIFICATION ONLY)

MS PART NO.	TR NO.	TEMPERATURE RANGE	OPERATING RANGE	CLASS
MS 51377-1	C-4	−65°+350° F	0-400 PSI	1
MS 51377-2	C-1	−40°+165° F	0-200 PSI	3
MS 51377-3	C-1	−40°+165° F	0-200 PSI	3
MS 51377-4	C-4	−65°+350° F	0-400 PSI	1

NOTES:
1. FOR AUTOMOTIVE APPLICATIONS, LONG AND SHORT VALVE CORES, BOTH C-1 AND C-4 ARE INTERCHANGEABLE AND ARE OPTIONAL FOR USE INTERCHANGEABLY IN THE TR-70, TR-87, AND TR-412 VALVES, WHICH USE SHORT CORES ONLY.
2. FINISH: BRASS COMPONENTS NICKEL PLATED, QQ-N-290, CLASS 1, WHERE PRACTICAL.
3. REMOVE SHARP BURRS.
4. DIMENSIONS ARE IN INCHES. TOLERANCES ARE AS SHOWN.
5. FOR [illegible] THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCING IT.
6. THIS STANDARD IS NOT APPLICABLE TO NEW DESIGN.

(D) CANCELLED AFTER 28 JUNE 1976

FOR NEW DESIGN AND PROCUREMENT USE TIRE AND RIM ASSOCIATION STANDARDS YEARBOOK PER ZZ-V-25

P.A. ARMY-AV Other Cust NAVY-YD AF-04	TITLE VALVE CORE, PNEUMATIC TIRE: STANDARD BORE	MILITARY STANDARD MS 51377
PROCUREMENT SPECIFICATION ZZ-V-25	SUPERSEDES	SHEET 1 OF 1

DD, FORM 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 2640-0167

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:00Z
Check the source to verify that this is the current version before use.