FED. SUP CLASS
9505

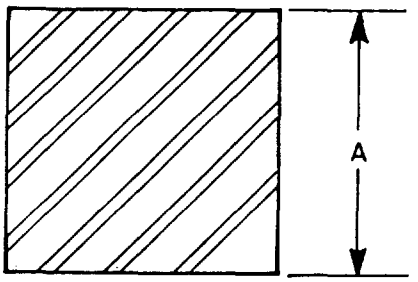


TABLE I. DASH NUMBERS AND DIMENSIONS

DASH NO	A	HEAT TREATMENT	FORMING PROCESS 1/
-001	.1250	AS FABRICATED	C
-003	.1875	AS FABRICATED	C
-005	.2500	AS FABRICATED	C

1/ SEE REQUIREMENT 3

REQUIREMENTS:

1. MATERIAL. STEEL, CARBON, GRADE 1018 (UNS G10180) AS SPECIFIED IN PROCUREMENT DOCUMENT.
2. LENGTH. STANDARD LENGTH OF WIRE IS 10 FEET MINIMUM, 12 FEET MAXIMUM.
3. FORMING PROCESS. COLD DRAWN - CODE "C"
4. PART NUMBER. THE PART NUMBER CONSISTS OF THE BASIC MS NUMBER, PLUS A DASH NUMBER FROM TABLE I.

EXAMPLE: MS52097-001

(SEE TABLE I)

BASIC MS NUMBER

5. MARKING. IRON AND STEEL PRODUCTS SHALL BE MARKED IN ACCORDANCE WITH FED-STD-183 WITH THE EXCEPTION THAT A PART NUMBER FROM THIS MILITARY STANDARD SHALL BE INCLUDED AS PART OF THE IDENTIFICATION MARKING.

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
3. REFERENCED GOVERNMENT (OR NONGOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

APPROVED 6 MAR 87 REVISED

USER ACTIVITIES:
ARMY- ME, MI

REVIEWER ACTIVITIES:
ARMY-AR, AT
AIR FORCE-99
DLA-IS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P. A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
ARMY-MR Other Cust NAVY-AS		WIRE,NONELECTRICAL,SQUARE, STEEL,CARBON, 1018	MS52097
PROCUREMENT SPECIFICATION ASTM A108	SUPERSEDES:		SHEET 1 OF 1

AMSC N/A

DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

9505- 0180

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:19Z
Check the source to verify that this is the current version before use.