INCH-POUND


MIL-DTL-24560/12C(SH)
5 February 1999
SUPERSEDING
MIL-L-24560/12B(SH)
11 June 1984

DETAIL SPECIFICATION SHEET

LIGHT, NAVIGATION, IDENTIFICATION (SUBMARINE), YELLOW, 120 VOLTS, 500 WATTS, ONE LAMP, SYMBOL 233.1

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.


The requirements for acquiring the light described herein shall consist of this specification and MIL-DTL-24560.

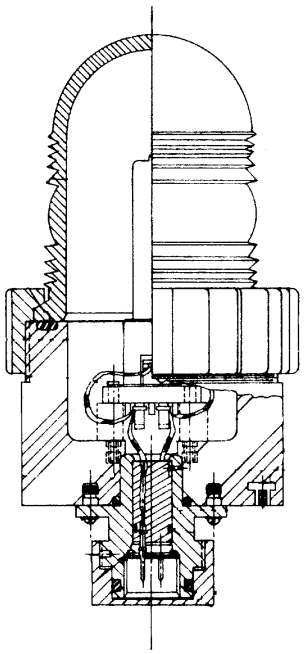

AMSC N/A FSC 6220

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:57Z
Check the source to verify that this is the current version before use.

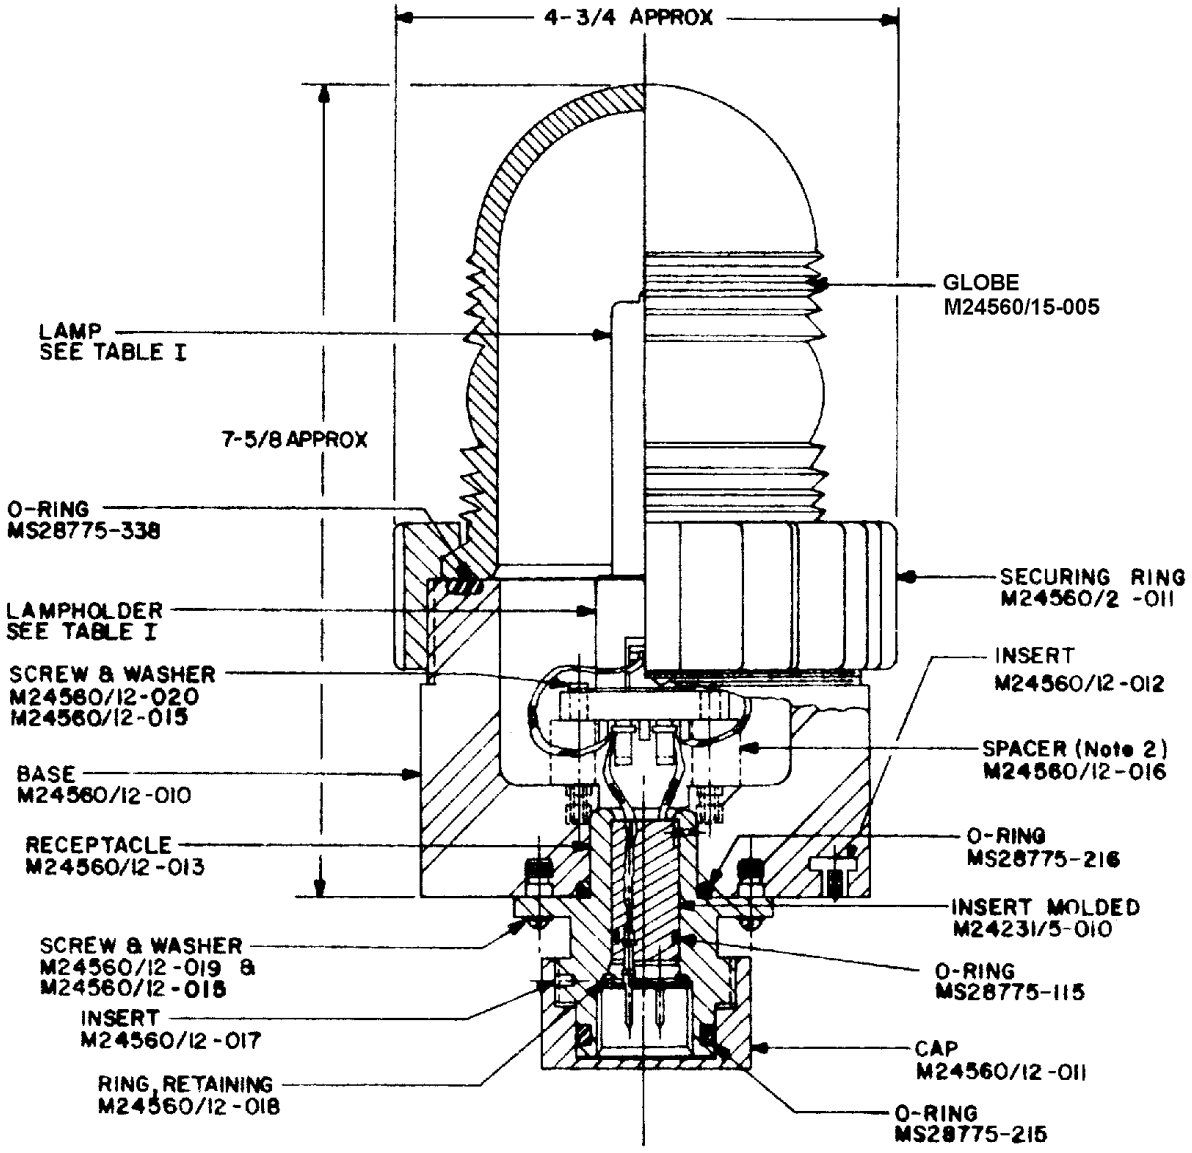

M24560/12-001
ASSEMBLY, IDENTIFICATION (SUB) -SYM 233.1

NOTES:
1. All dimensions are in inches.
2. For tolerances other than those specified herein, see MIL-DTL-24560.

FIGURE 1. Light assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:57Z
Check the source to verify that this is the current version before use.



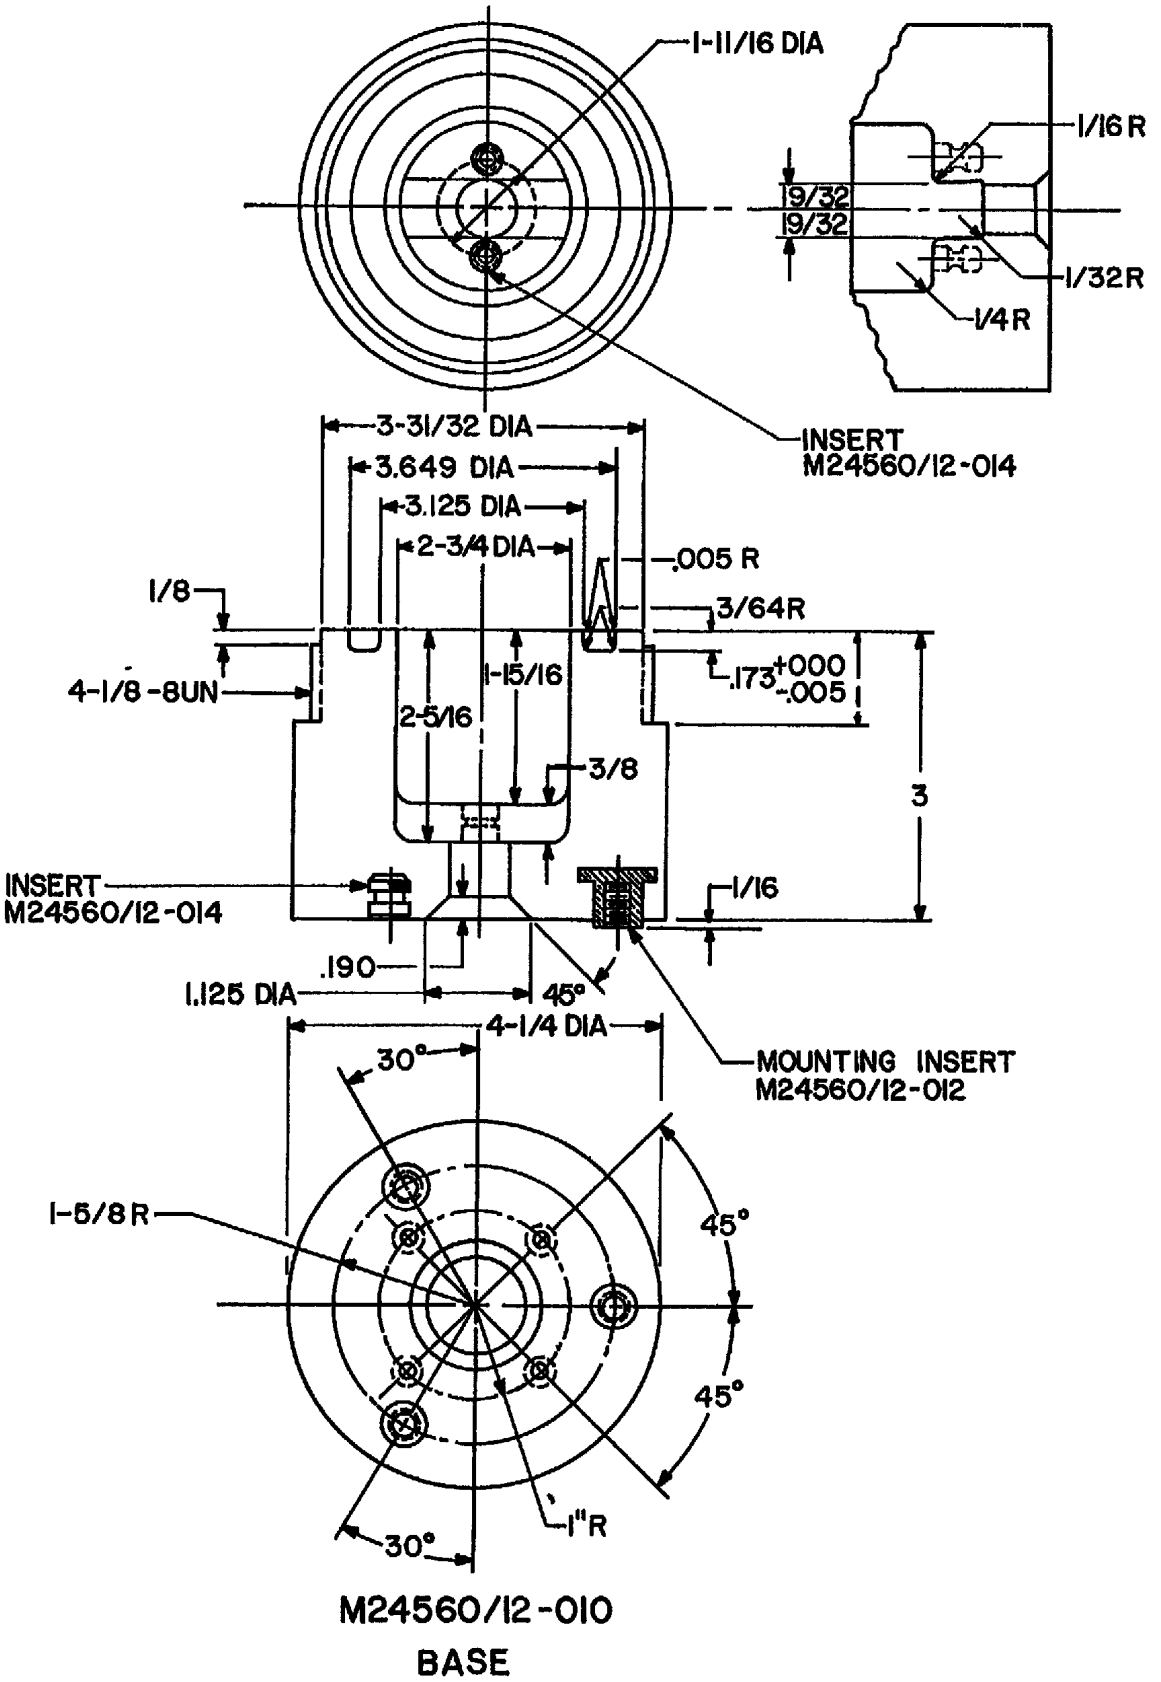


FIGURE 2. Base.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:57Z
Check the source to verify that this is the current version before use.

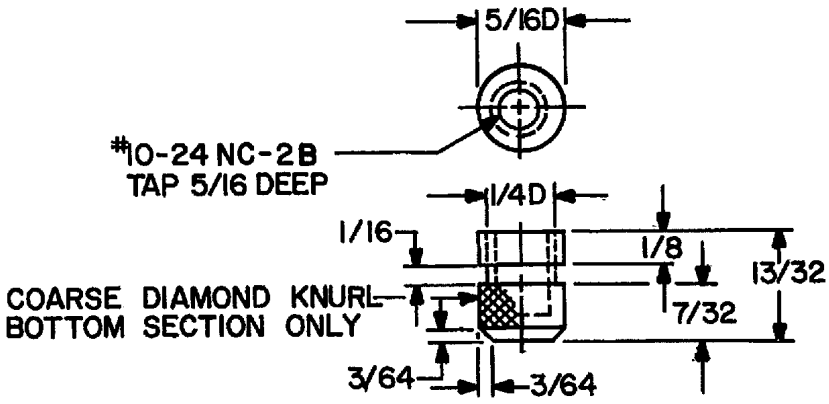

M24560/12-014
INSERT

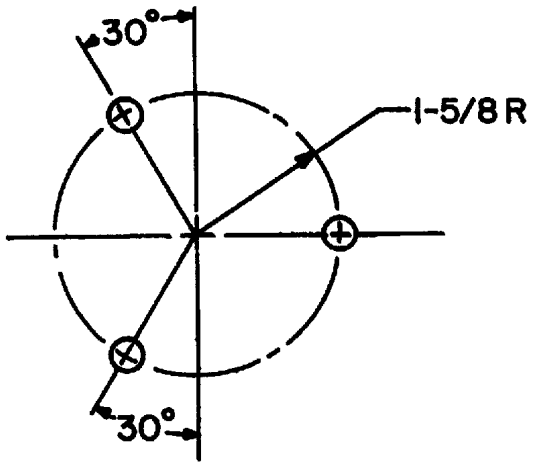

MOUNTING BOLTS SHALL
BE 5/16-18 CRES

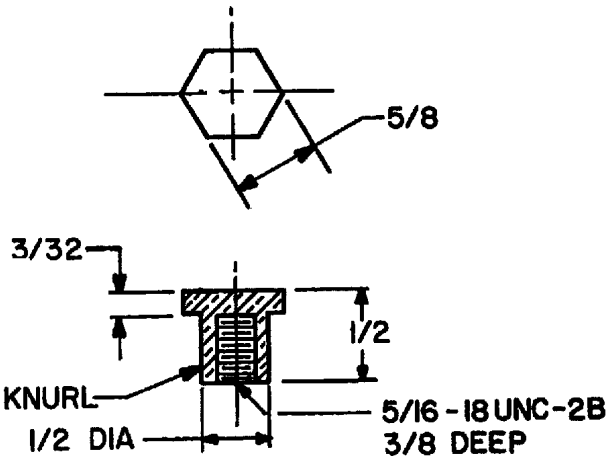

M24560/12-012
MOUNTING INSERT

FIGURE 3. Insert and mounting insert.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:57Z
Check the source to verify that this is the current version before use.

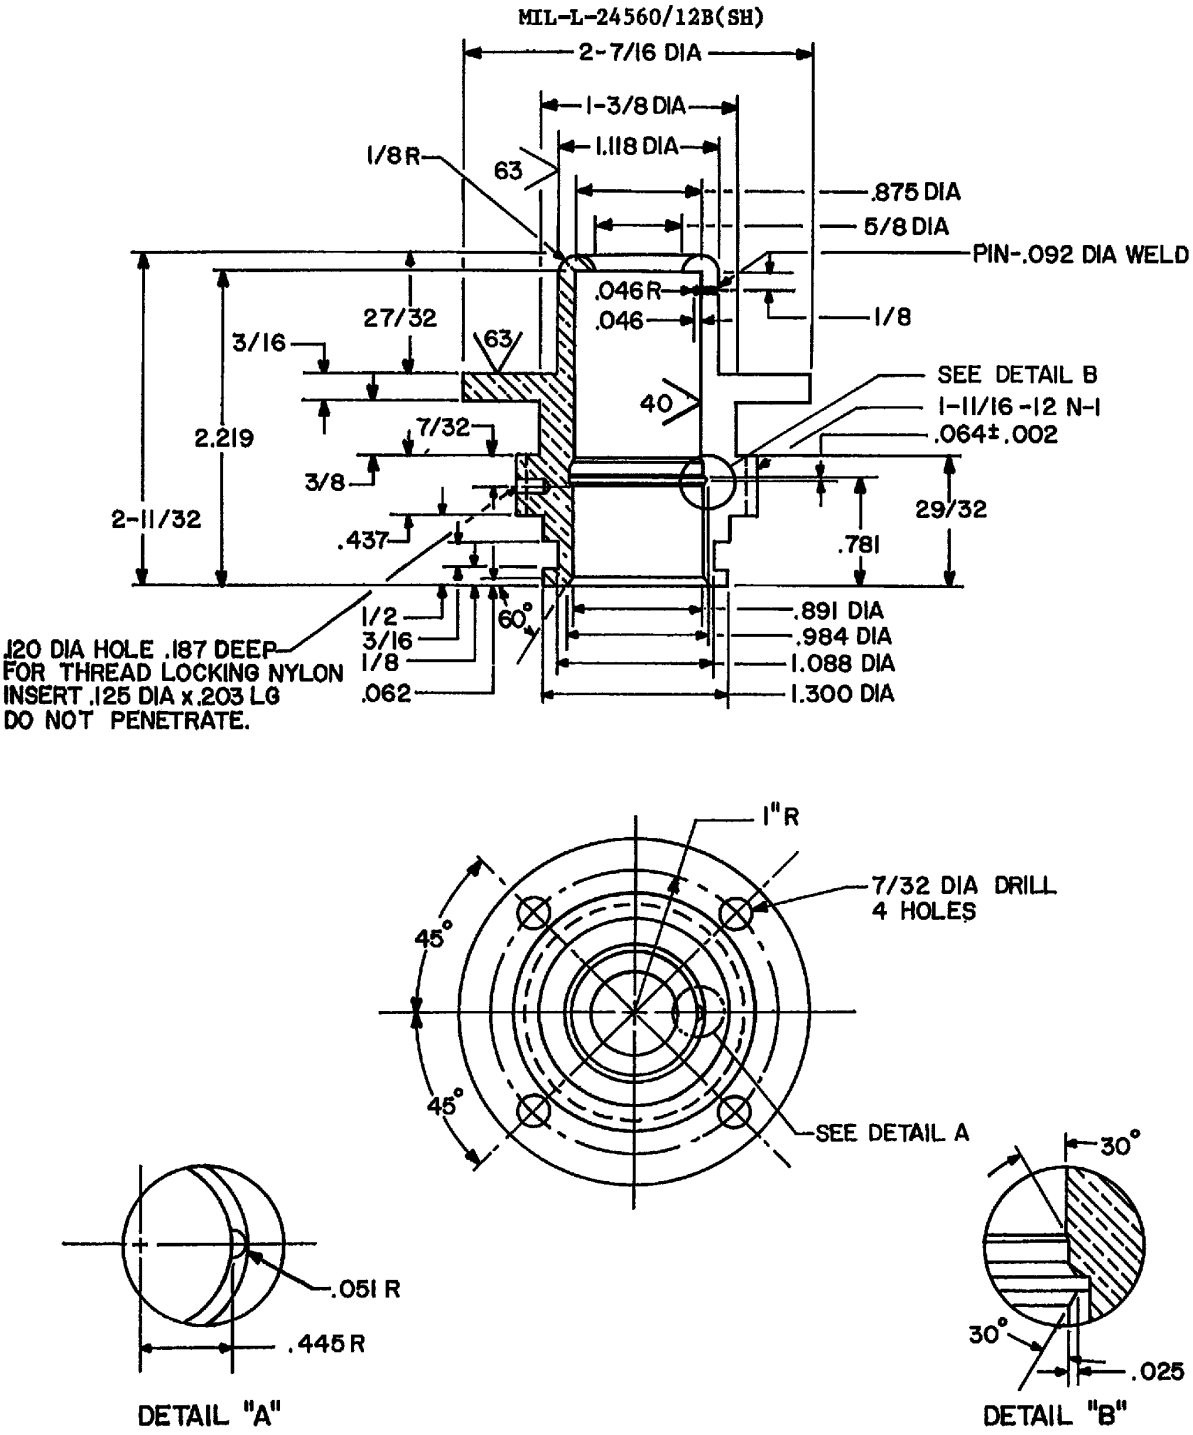


FIGURE 4. Receptacle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:57Z
Check the source to verify that this is the current version before use.

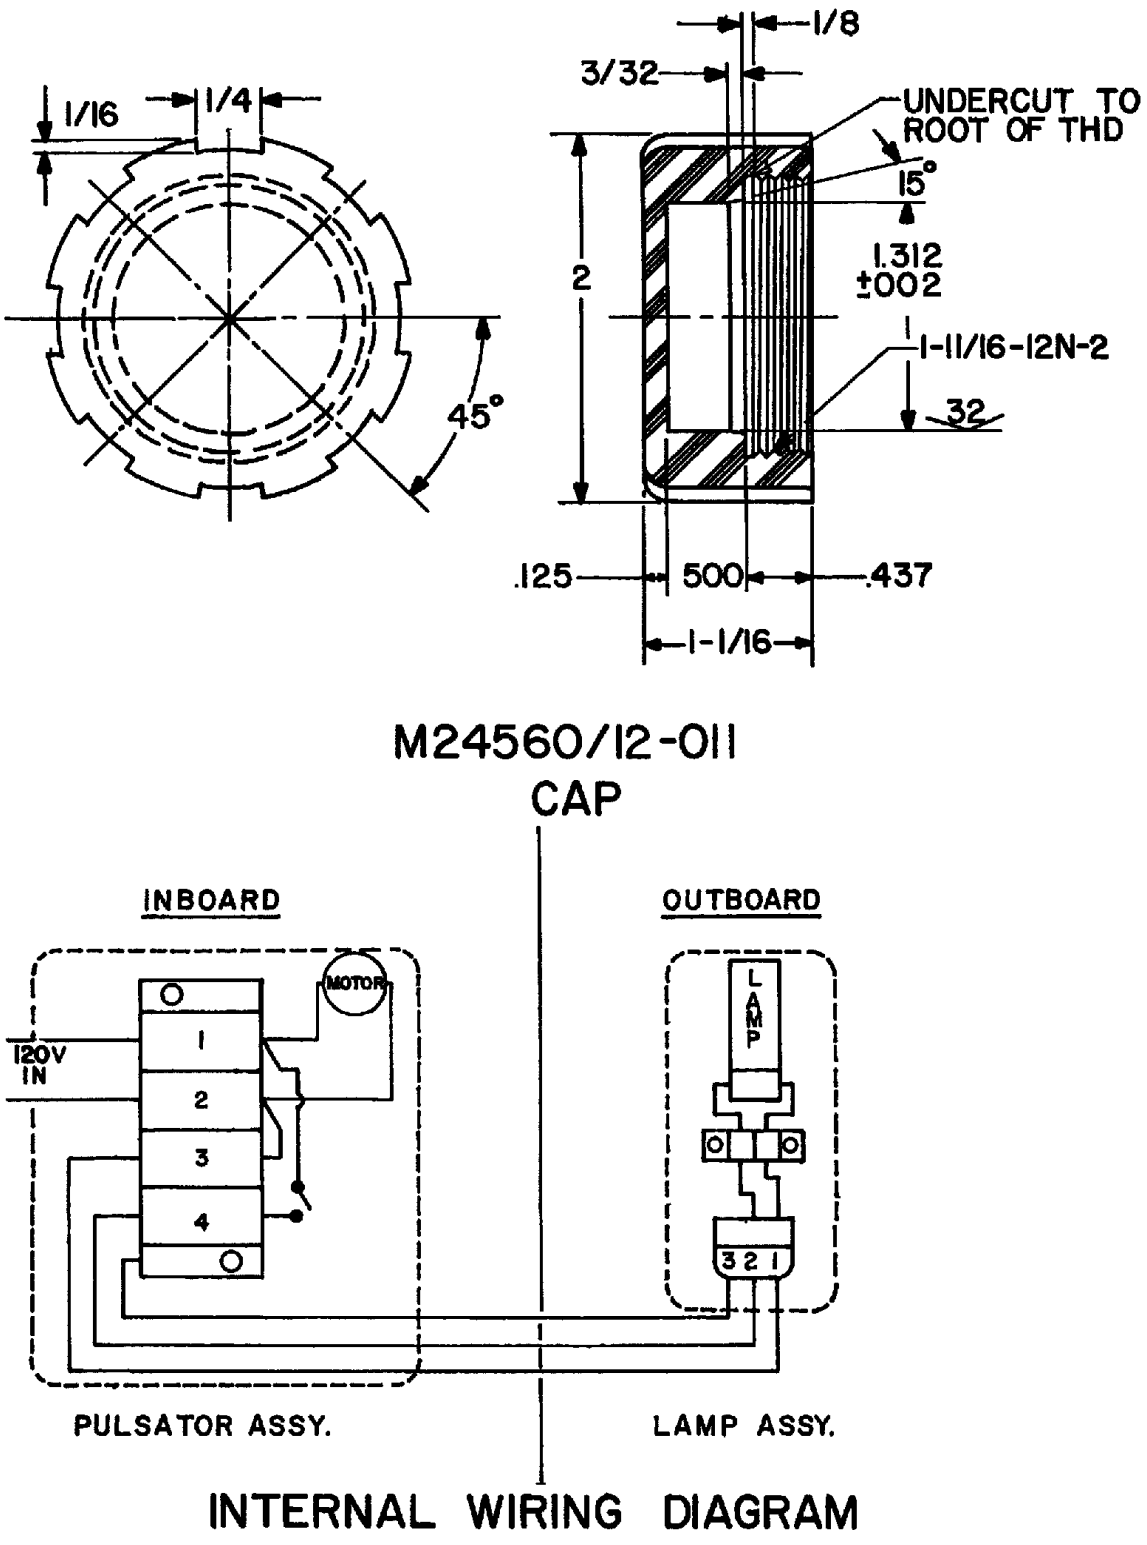


FIGURE 5. Cap and internal wiring diagram.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:57Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

DESIGN:
Electrical rating: 120 volts, 60 hertz, 500 watts.
Dimensions and configuration: See figures.
Enclosure: Submersible (type II).
Parts: See table I.
First article: Examination of product, magnetic permeability, operation, insulation resistance, dielectric withstanding voltage, vibration, shock, salt spray, degree of enclosure, hydrostatic pressure.

GENERAL INFORMATION: Assignment of military part numbers and general information are as follows:

(a) Military part number: M24560/12-001 - light assembly, symbol 233.1.
(b) Supersedes Drawing 803-5001032.
(c) Weight: The weight of the body assembly shall be 4.5 pounds maximum.

NOTES:
1. This light will be mounted in base down position.
2. Spacer (M24560/12-016) shall be used to position the top of the lampholder socket approximately 1/16 inch above the top of base (M24560/12-010).
3. Molded plug, M24231/1-001 or M24231/2-001, sym 713 or 713.5, using type TSS-4 cable conforming to MIL-C-915/8.
4. Each assembly shall be subject to a hydrostatic pressure of 1500 lb/in^2 $\pm$ 1 percent for 1 hour. The test shall be conducted with cap (M24560/12-011) or plug (M24231/1-001 or M24231/2-001) removed.

TABLE I. Parts.

Part number 1/	Part name	Qty.	Specification	Additional information
M24560/12-010	Base	1	MIL-M-14	Molded plastic GDI-30 or GPI-100 (black)
M24560/12-011	Cap	1	MIL-M-14	Molded plastic GDI-30 or GPI-100 (black)
M24560/12-012	Mounting insert	3	COML	AL BRZ
M24560/12-013	Receptacle	1	QQ-N-281	Ni-CU alloy class A
M24560/12-014	Insert	6	COML	AL BRZ
M24560/12-015	Washer, lock	6	COML	CRES, #10
M24560/12-016	Spacer	2	COML	CRES
M24560/12-017	Insert	1	COML	Nylon 0.125$\pm$ 0.001 dia x 0.203 lg

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:57Z
Check the source to verify that this is the current version before use.

TABLE I. Parts - Continued.

Part number 1/	Part name	Qty.	Specification	Additional information
M24560/12-018	Ring, retaining	1	COML	SPIRALOX, PRD-99-M or equal
M24560/12-019	Screw, mach R.H.	4	COML	CRES, #10-24 NC-2A x ¾ long
M24560/12-020	Screw, mach fil hd	2	COML	CRES, #10-24 NC-2Z x ¾ long
MS28775-338	O-Ring	1	MS28775-115	
MS28775-216	O-Ring	1	MS28775-115	
MS28775-215	O-Ring	1	MS28775-115	
MS28775-115	O-Ring	1	MS28775-115	
	Lampholder	1	COML	Sylvania elect. Prod type S-4 or equal
	Lamp	1	COML	IND #500 Q/CL
	Insert, molded	1	MIL-C-24231/5	M24231/5-010 (wire only 12″ lg)
M24560/2-011	Securing ring	1	MIL-M-14	Molded plastic MFI-20, black
M24560/15-005	Globe	1	MIL-DTL-24560/15	Yellow

1/ Part numbers M24560/13-010 through M24560/12-020 were assigned for reference purposes only.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with repsect to the previous issue due to the extent of the changes.

Preparing activity:
Navy - SH
(Project 6220-N391)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:57Z
Check the source to verify that this is the current version before use.