INCH-POUND


MIL-DTL-24560/13D(SH)
5 February 1999
SUPERSEDING
MIL-L-24560/13C(SH)
17 August 1990

DETAIL SPECIFICATION SHEET

LIGHTS, NAVIGATION, SUBMARINE, CLEAR, CLEAR (MASKED), RED AND GREEN, 120 VOLTS, 50 WATTS, ONE LAMP, SYMBOLS 174.4, 174.5, 188.3, AND 189.3

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.


The requirements for acquiring the light described herein shall consist of this specification and MIL-DTL-24560.

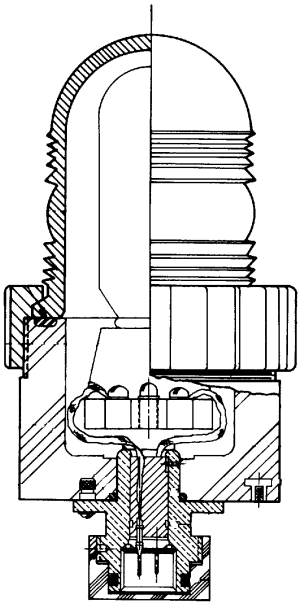

AMSC N/A FSC 6220

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:57Z
Check the source to verify that this is the current version before use.

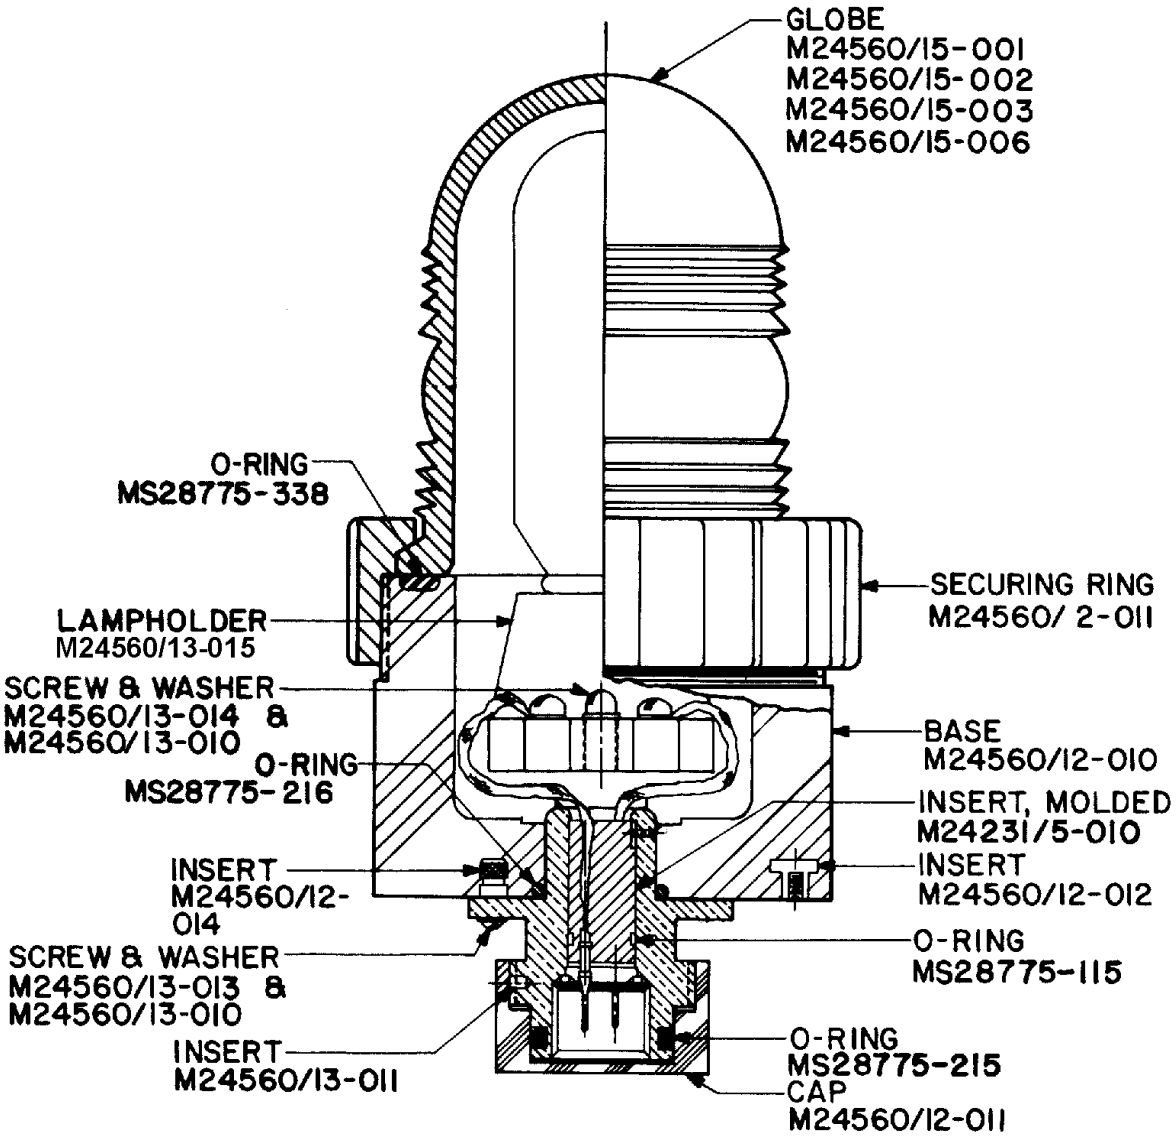

M24560/13-001, 002, 003 & 004
ASSEMBLY, LIGHT (SUB), SYM. 174.4, 174.5, 188.3 & 189.3

NOTES:
1. All dimensions are in inches.
2. For tolerances other than those specified herein, see MIL-DTL-24560.

FIGURE 1. Light assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:57Z
Check the source to verify that this is the current version before use.

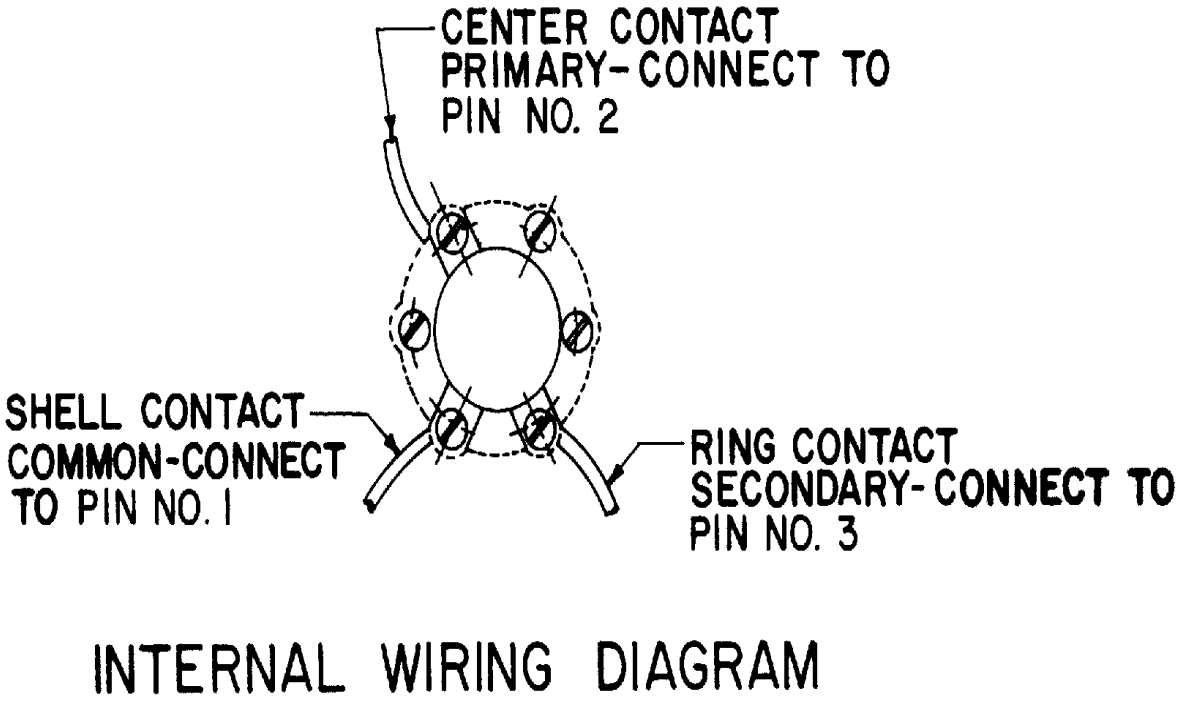


FIGURE 2. Internal wiring diagram.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:57Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

DESIGN:
Electrical rating: 120 volts, 60 hertz, 50 watts.
Dimensions and configuration: See figures.
Enclosure: Submersible (type I).
Parts: See table I.
First article: Examination of product, magnetic permeability, operation, insulation resistance, dielectric withstanding voltage, vibration, shock, salt spray, degree of enclosure, hydrostatic pressure.

GENERAL INFORMATION: Assignment of military part numbers and general information are as follows:

(a) Military part numbers: M24560/13-001 - light assembly, symbol 174.4 - clear.
M24560/13-002 - light assembly, symbol 188.3 - clear (masked).
M24560/13-003 - light assembly, symbol 189.3 - red.
M24560/13-004 - light assembly, symbol 174.5 - green.

(b) Weight: The weight of the body assembly shall be not greater than 4.5 pounds.

NOTES:
1. This light will be mounted in base down position.
2. Molded plug, M24231/1-001 or M24231/2-001, symbol 713 or 713.5, using type TSS-4 cable in accordance with MIL-C-915/8 shall be used with this light.
3. Each assembly shall be subjected to a hydrostatic pressure of 1500 lb/in^2 $\pm$ 1 percent for 1 hour. The test shall be conducted with cap (M24560/12-011) or plug (M24231/1-001 or M24231/2-001) removed.

TABLE I. Parts.

Part number 1/	Part name	Qty.	Specification	Additional information
M24560/13-010	Washer, lock	6	COML	CRES #10
M24560/13-011	Insert	1	COML	Nylon 0.125 $\pm$ 0.002 dia long
M24560/13-012	Ring, retaining	1	COML	Spiralox, PRD-99-M, or equivalent
M24560/13-013	Screw, mach R.H.	4	COML	CRES, #10-24 UNC-2A x 1/2

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:57Z
Check the source to verify that this is the current version before use.

TABLE I. Parts - Continued.

Part number 1/	Part name	Qty.	Specification	Additional information
M24560/13-014	Screw, mach fil. Hd	2	COML	CRES, #10-24 UNC-2A x 3/4
M24560/2-011	Securing ring	1	MIL-M-14	Molded plastic GDI-30 or GPI-100 (black)
M24560/12-010	Base	1	MIL-M-14	Molded plastic GDI-30 or GPI-100 (black)
M24560/12-011	Cap	1	MIL-M-14	Molded plastic GDI-30 or GPI-100 (black)
M24560/12-012	Mounting insert	3	COML	AL BRZ
M24560/12-013	Receptacle	1	QQ-N-281	Ni-Cu alloy class A
M24560/12-014	Insert	1	COML	AL BRZ
M24560/15-001	Globe - fresnel - clear	1	MIL-DTL-24560/15	For use with sym 174.4
M24560/15-006	Globe - fesnel - clear masked	1	MIL-DTL-24560/15	For use with sym 188.3
M24560/15-002	Globe - fesnel - red	1	MIL-DTL-24560/15	For use with sym 189.3
M24560/15-003	Globe - fresnel - green	1	MIL-DTL-24560/15	For use with sym 174.5
MS28775-238	O-ring	1	MS28775	
MS28775-216	O-ring	1	MS28775	
MS28775-215	O-ring	1	MS28775	
MS28775-115	O-ring	1	MS28775	
M24560/13-015	Lampholder	1	COML - UL496	Supplement SA, fig. SA3.6
	Lamp	1	COML	50/50T12
M24231/5-010	Insert, molded	1	MIL-C-24231	M24231/5-010 (wire only 0.12 inch long)

1/ Part numbers M24560/13-010 through M24560/13-015 were assigned for reference purposes only.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Preparing activity:
Navy - SH
(Project 6220-N392)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:57Z
Check the source to verify that this is the current version before use.