INCH-POUND
MIL-L-24560/15B(SH)
17 August 1990
SUPERSEDING
MIL-L-24560/15A(SH)
10 August 1981

MILITARY SPECIFICATION SHEET

LIGHT, LENS, FRESNEL, GLOBE, CLASS 3,
TRANSPARENT, (CLEAR, CLEAR MASKED, RED, GREEN, BLUE, AND YELLOW)

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-L-24560(SH).

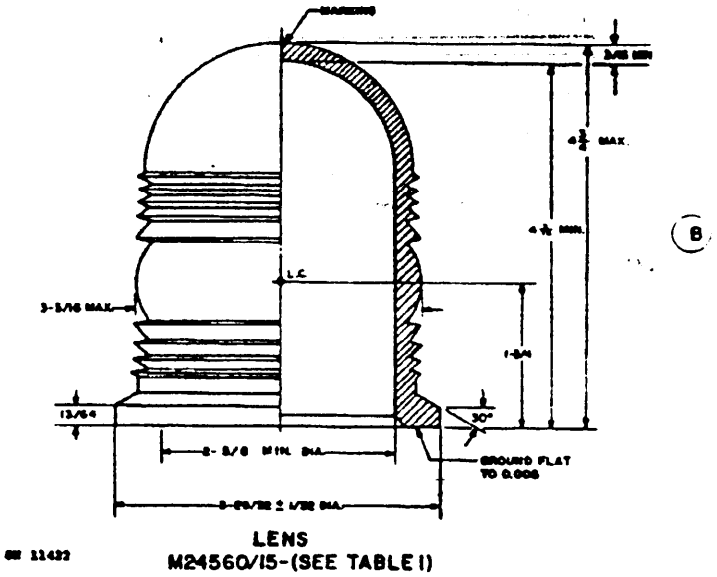


FIGURE 1. Globe lens.

All dimensions are in inches.
For tolerances other than those specified herein, see MIL-L-24560.

(B) denotes changes.

AMSC N/A FSC 6220
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:57Z
Check the source to verify that this is the current version before use.

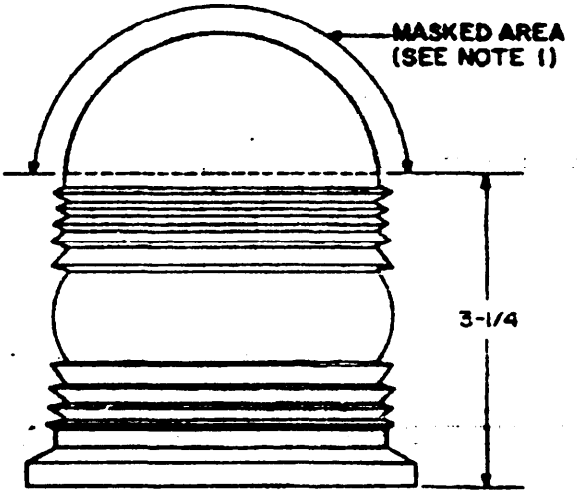


FIGURE 2. Lens (masked).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:57Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Materials: Glass, class 3.
Color: As required.
Inside finish: Smooth.
(B) Marking: M24560/15 and the glass batch number shall be molded, sandblasted, etched, or a combination thereof, and located as shown on figure 1.
First article: Examination of product, light output, color (chromaticity), mechanical shock, thermal shock, hydrostatic pressure, breakage pattern, color deterioration.
Hydrostatic: Glass shall be capable of withstanding, for its useful optical life, a continuous or fluctuating external hydrostatic pressure of 1500 lb/in^2 when mounted in the fixture in which it is designed to be used.

NOTES:

1. A vitreous, opaque, black or dark gray weather and heat resistant enamel of a good commercial grade shall be applied to black-out the globe as indicated.
2. The globe shall pass the hydrostatic test when assembled on and tested with the base assembly of MIL-L-24560/13.

TABLE I. Parts.

Part number	Color
M24560/15-001	Clear - Transparent
M24560/15-002	Red - Transparent
M24560/15-003	Green - Transparent
M24560/15-004	Blue - Transparent
M24560/15-005	Yellow - Transparent
M24560/15-006	Clear - Masked 1/
M24560/15-007	Red - Masked 1/

1/ In addition to the first article tests listed above, the paint removal test shall also be performed (see 4.7.2.3).

Preparing activity:
Navy - SH
(Project 6220-N358-11)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:57Z
Check the source to verify that this is the current version before use.