INCH-POUND


MIL-DTL-24560/15C(SH)
5 February 1999
SUPERSEDING
MIL-L-24560/15B(SH)
17 August 1990

DETAIL SPECIFICATION SHEET

LIGHT, LENS, FRESNEL, GLOBE, CLASS 3, TRANSPARENT (CLEAR, CLEAR MASKED, RED, GREEN, BLUE, AND YELLOW)

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.


The requirements for acquiring the light described herein shall consist of this specification and MIL-DTL-24560.

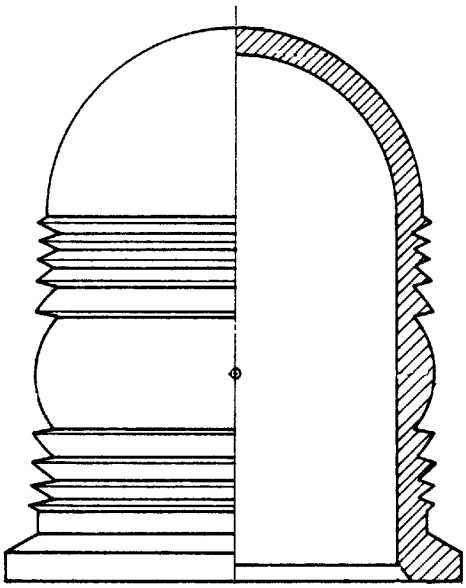

AMSC N/A FSC 6220

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:57Z
Check the source to verify that this is the current version before use.

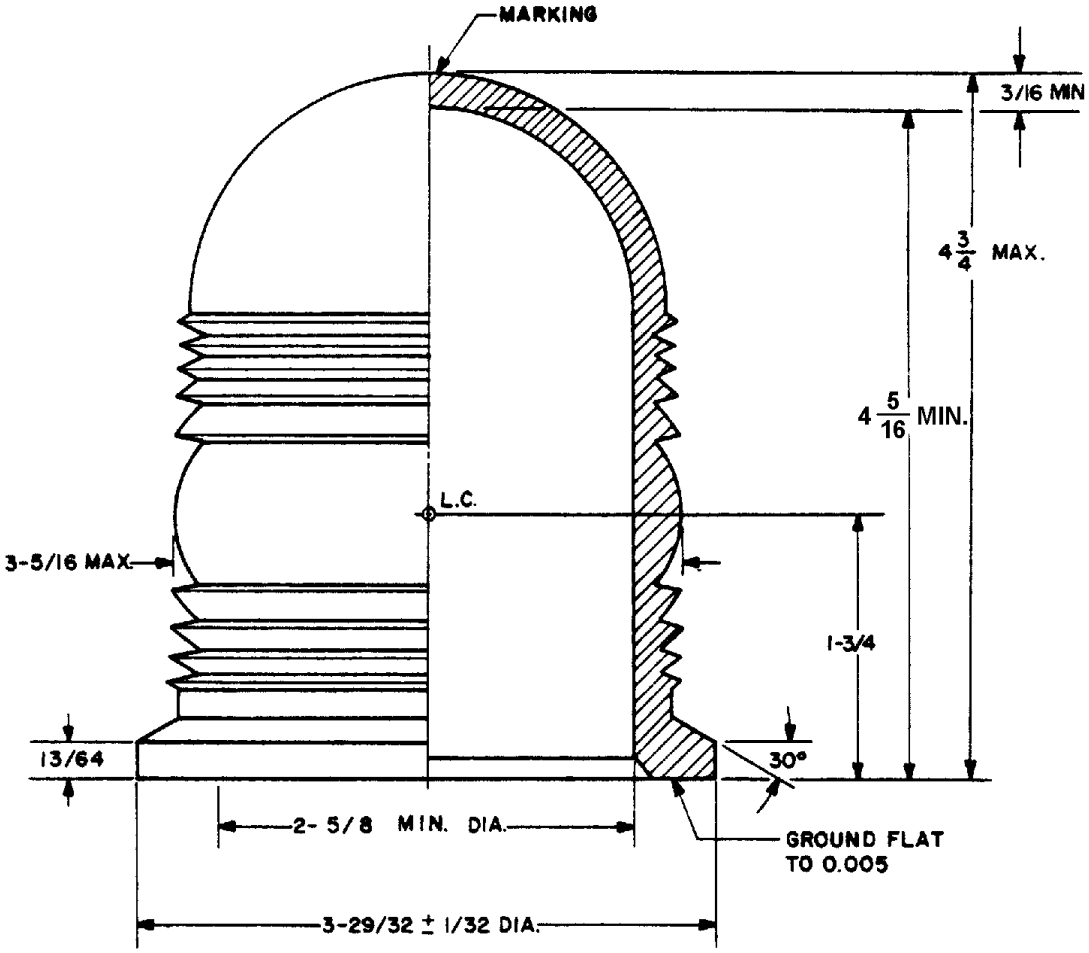


LENS
M24560/15-(SEE TABLE I)

NOTES:
1. All dimensions are in inches.
2. For tolerances other than those specified herein, see MIL-DTL-24560.

FIGURE 1. Light lens.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:57Z
Check the source to verify that this is the current version before use.

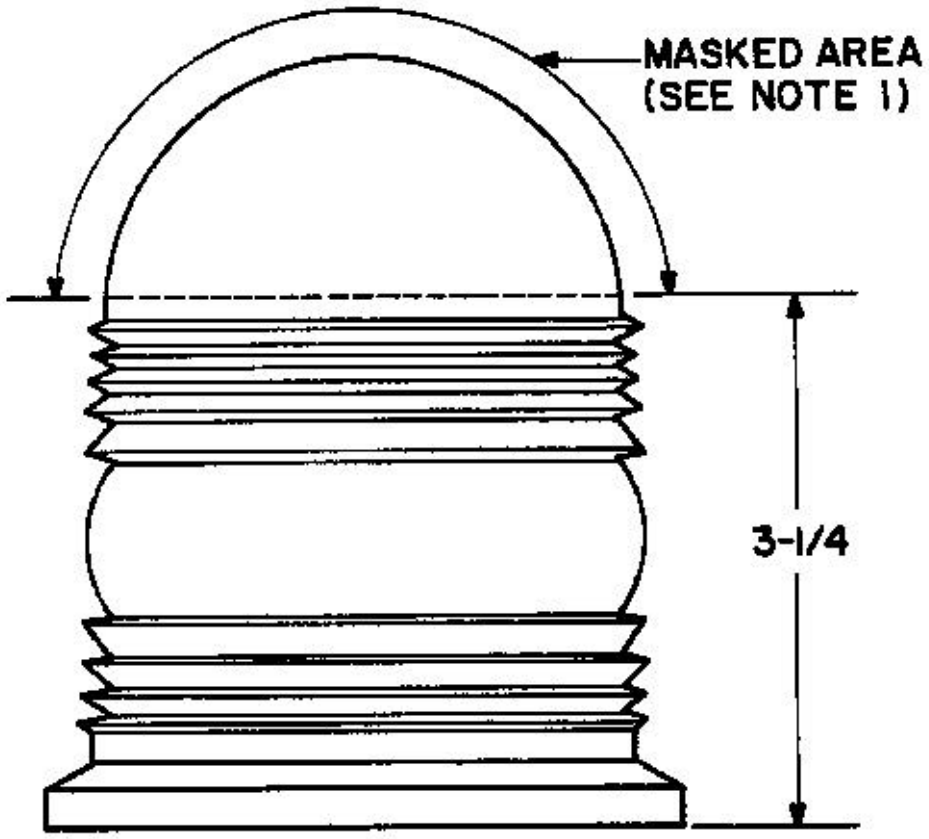

LENS CLEAR-MASKED
M24560/15-006
M24560/15-007

FIGURE 2. Light lens clear - masked.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:57Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

DESIGN:

Materials:	Glass, class 3.
Color:	As required.
Inside finish:	Smooth.
Marking:	M24560/15 and the glass batch number shall be molded, sandblasted, etched, or a combination thereof, the located as shown on figure 1.
First article:	Examination of product, light output, color (chromaticity), mechanical shock, thermal shock, hydrostatic pressure, breakage pattern, color deterioration.
Hydrostatic:	Glass shall be capable of withstanding, for its useful optical life, a continuous or fluctuating external hydrostatic pressure of 1500 lb/in^2 when mounted in the fixture in which it is designed to be used.

NOTES:

1. A vitreous, opaque, black or dark gray weather and heat resistant enamel of a good commercial grade shall be applied to black-out the globe as indicated.
2. The globe shall pass the hydrostatic test when assembled on and tested with the base assembly of MIL-DTL-24560/13.

TABLE I. Parts.

Part number 1/	Color
M24560/15-001	Clear - Transparent
M24560/15-002	Red - Transparent
M24560/15-003	Green - Transparent
M24560/15-004	Blue - Transparent
M24560/15-005	Yellow - Transparent
M24560/15-006	Clear - Masked 1/
M24560/15-007	Red - Masked 1/

1/ In addition to the first article tests listed above, the paint removal test shall also be performed (see MIL-DTL-24560).

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Preparing activity:
Navy - SH
(Project 6220-N393)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:57Z
Check the source to verify that this is the current version before use.