INCH-POUND

MIL-DTL-24560/27(SH)
5 February 1999
SUPERSEDING
MIL-L-970/5A(SH)
3 January 1977

DETAIL SPECIFICATION SHEET

LAMPHOLDER ASSEMBLY, MULTILAMP (SIX LAMPS), CANDELABRA SCREW, 125 VOLTS, 450 WATTS

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquisition of the lampholder assembly described herein shall consist of this document and Underwriters Laboratories (UL) Standard 496 (Naval Supplement).

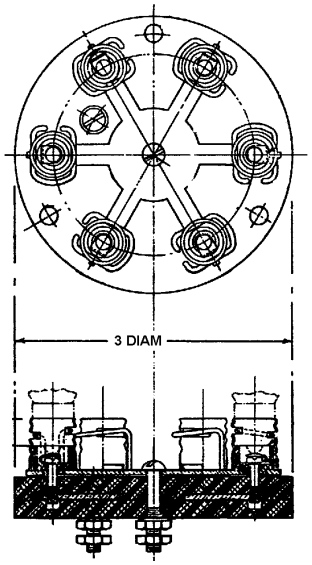

AMSC N/A FSC 6220

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T23:00Z
Check the source to verify that this is the current version before use.

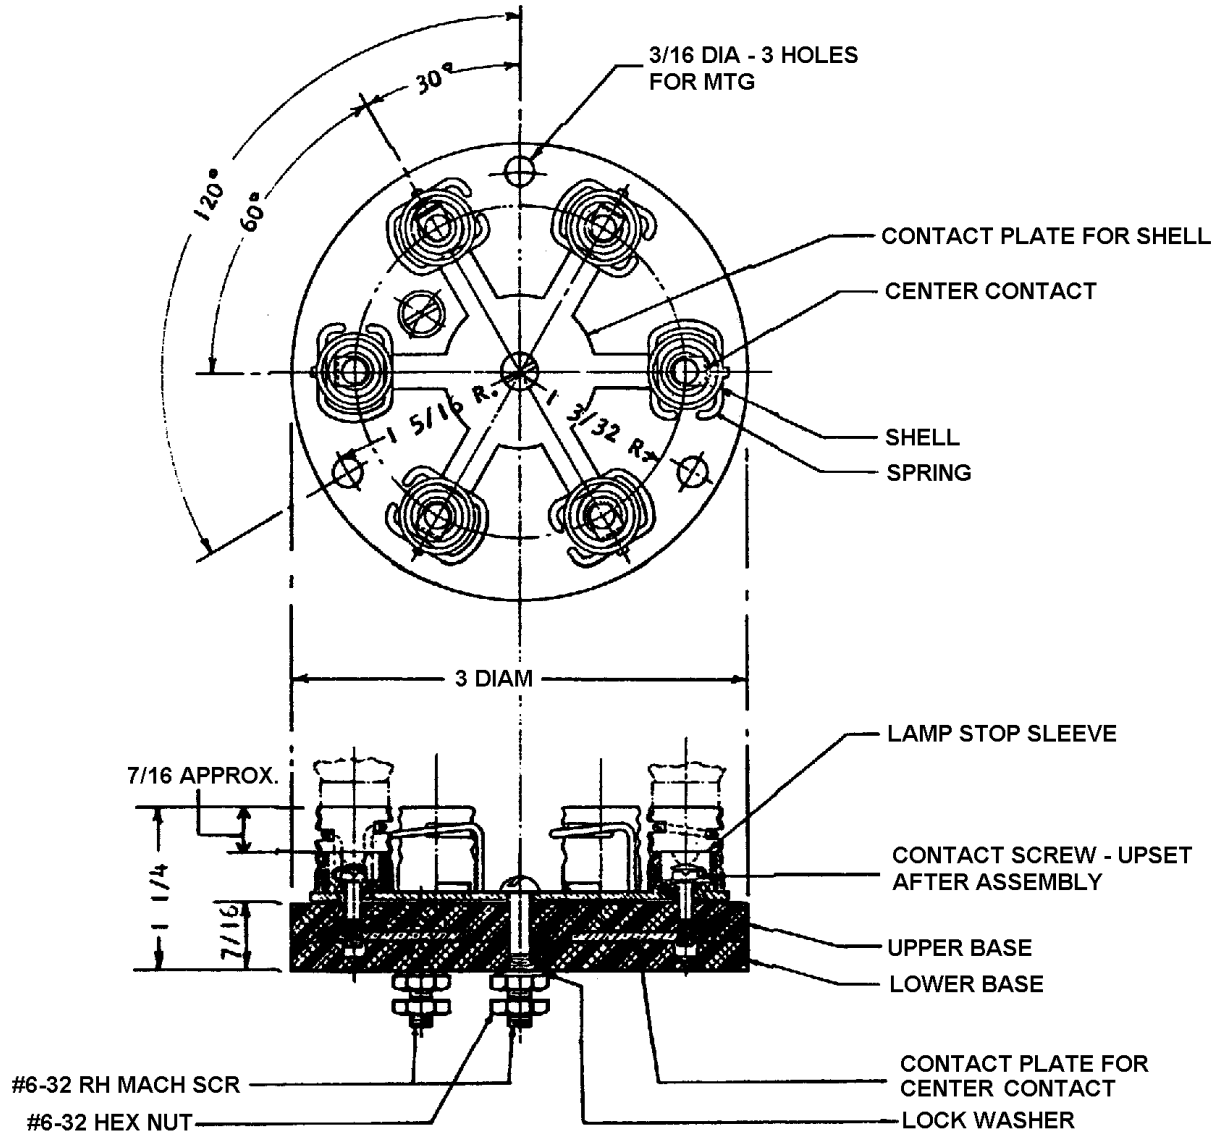

NOTES:

1. All dimensions are in inches. Unless otherwise specified, tolerances for fractions are plus or minus 1.64 inch. Tolerances for angles are plus or minus 1/2 degrees.

FIGURE 1. Lampholder assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T23:00Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

DESIGN:

Dimensions and configuration:	See figure 1. Lampholder assembly shall be designed to accommodate six candelabra screw base lamps.
Base and lamp stop sleeve:	Material shall be type MAI-30 or MAI-60 in accordance with MIL-M-14.
Center contact, spring and lockwasher:	Material shall be phosphor bronze.
Electrical rating:	125 volts, 450 watts.

TESTS:

First article:	Examination of the product shall include the following:
Workmanship:	The lampholder assembly shall be examined and shall have a smooth finish, smooth flash edges, and be buffer smooth; parts shall show no breakage, damage, or loosening.
Shock:	Shall withstand grade A, class II, shock test of MIL-S-901 when lampholder assembly is installed in a light fixture of MIL-DTL-24560.
Vibration:	Shall withstand type I vibration test of MIL-STD-167-1 when lampholder assembly is installed in a light fixture of MIL-DTL-24560.
Strength:	Lampholder assembly shall be fastened in a vertical position and a plug shall be threaded into each screw shell lampholder. A weight attached to each such that each is subjected to a vertical pull of 15 pounds for a period of 1 minute.
Torque:	Lampholder assembly shall be secured in any position position and a plug shall be threaded into each shell. A 15 inch-pound torque shall then be applied and conformance verified.

GENERAL INFORMATION: Assignment of military part numbers and general information are as follows:

(a) Military part number: M24560/27.
(b) Supersedes MIL-L-970/5.
(c) National Stock Number: 6250-00-264-6441.

Preparing activity:
Navy - SH
(Project 6220-N405)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T23:00Z
Check the source to verify that this is the current version before use.