INCH-POUND


MIL-DTL-24560/5B(SH)
5 February 1999
SUPERSEDING
MIL-L-24560/5A(SH)
17 August 1990

DETAIL SPECIFICATION SHEET

LIGHT, YARDARM BLINKER, CLEAR, 120 VOLTS, 180 WATTS, TWELVE LAMPS, SYMBOL 191.2

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.


The requirements for acquiring the light described herein shall consist of this specification and MIL-DTL-24560.

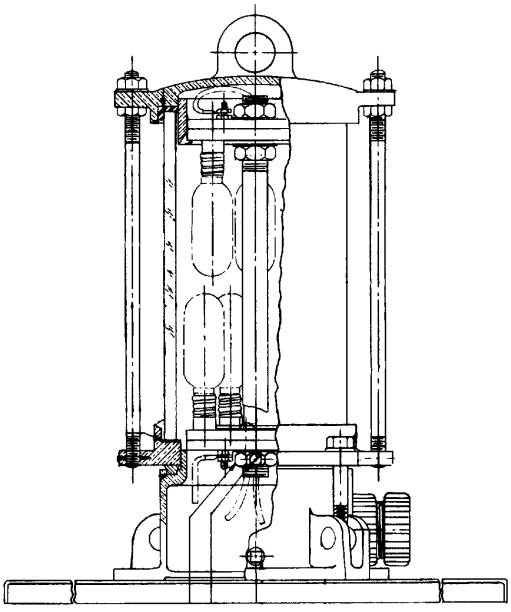

AMSC N/A FSC 6220

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:55Z
Check the source to verify that this is the current version before use.

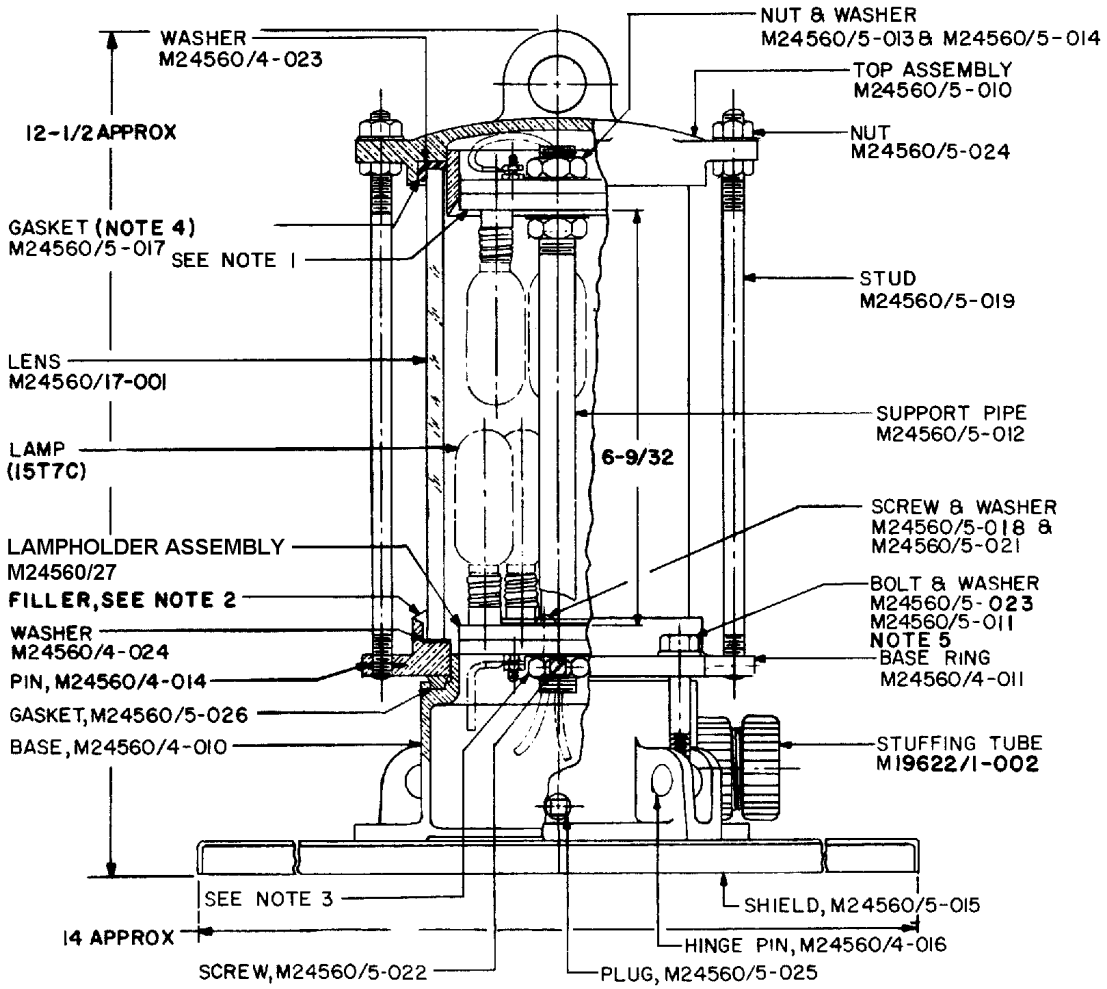

M24560/5-001

ASSEMBLY, YARDARM BLINKER - SYM 191.2

NOTES:

1. All dimensions are in inches.
2. For tolerances other than those specified herein, see MIL-DTL-24560.

FIGURE 1. Light assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:55Z
Check the source to verify that this is the current version before use.

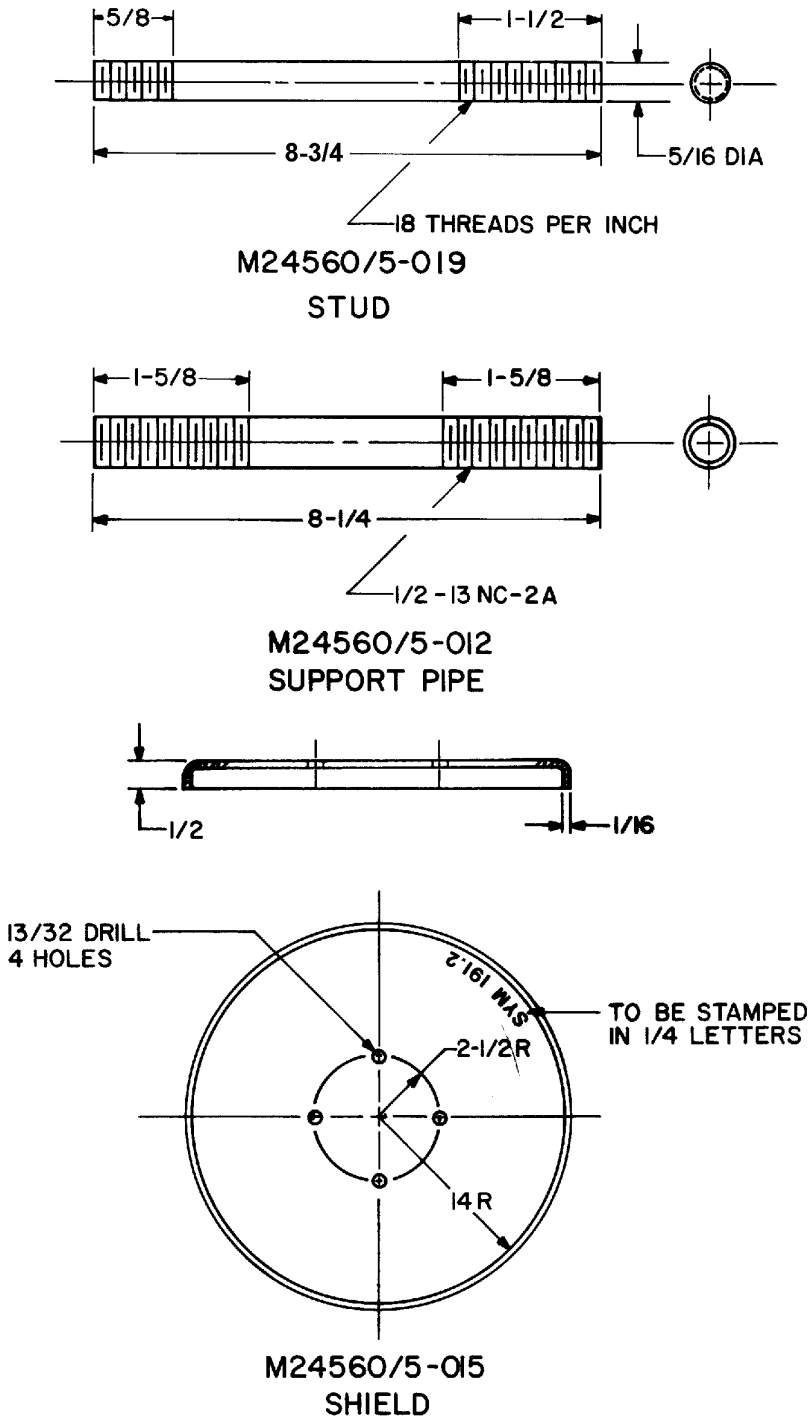


FIGURE 2. Stud, support pipe, and shield.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:55Z
Check the source to verify that this is the current version before use.

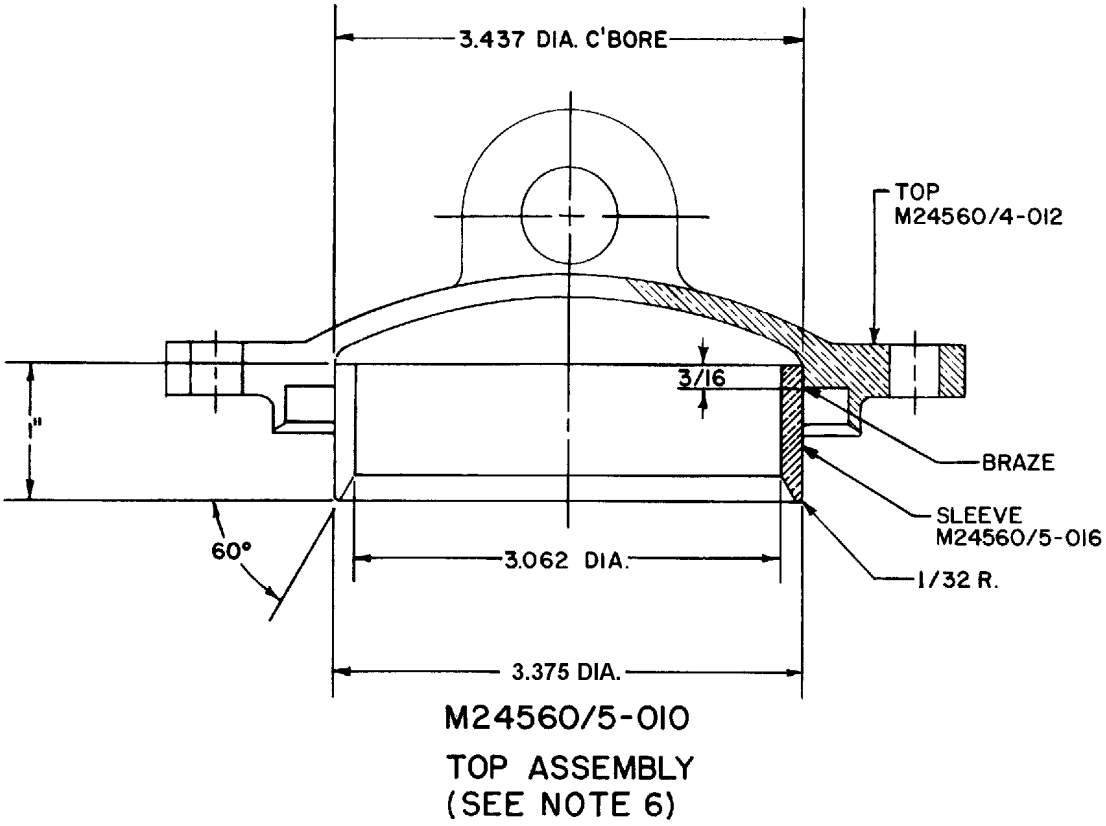


FIGURE 3. Top assembly, mounting dimensions, and typical installation wiring diagrams.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:55Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

DESIGN:
Electrical rating: 120 volts, 60 hertz, 180 watts.
Dimensions and configuration: See figures.
Enclosure: Splashproof (type I).
Parts: See table I.
First article: Examination of product, magnetic permeability, operation, insulation resistance, dielectric withstanding voltage, vibration, shock, salt spray, degree of enclosure.

GENERAL INFORMATION: Military part numbers and general information are as follows:

(a) Military part number: M24560/5-001 - light assembly, symbol 191.2.
(b) Weight: The weight of this light assembly shall be not greater than 25.6 pounds.

NOTES:
1. Rotate upper lampholder sufficiently to stagger lamps with those in lower lampholder.,
2. This space shall be packed with a caulking compound to provide a weather and heat resistant splashproof seal.
3. Tower jam nut, M24560/5-013, shall have one flat side drilled and tapped #6-32 UNC-2B, one hole.
4. Gasket, M24560/5-017, shall be cemented in place with seams left open to permit the light to breathe.
5. Bolt, M24560/5-023 shall have end of thread upset slightly to prevent removal.
6. Top assembly may be cast as one part in lieu of two pieces.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:55Z
Check the source to verify that this is the current version before use.

TABLE I. Parts.

Part number 1/	Part name	Qty.	Specification	Additional information
M24560/5-010	Top assembly	-		Note 6
M24560/5-011	Washer, lock	4	COML	Phosphor bronze 5.16
M24560/5-012	Support pipe	1	COML	Brass, ¼ IPS x 8 ¼ long
M24560/5-013	Nut	4	COML	Brass, ½-13 UNC-2B, Note 3
M24560/5-014	Washer, lock	4	COML	Phosphor bronze, ½
M24560/5-015	Shield	1	ASTM B 36	Brass
M24560/5-016	Sleeve	1	WW-P-351	Brass pipe, 8 IPS
M24560/5-017	Gasket	1	MIL-R-900	Rubber, 3/16 x 7/16 x length to suit
M24560/5-018	Screw, mach R.H.	3	COML	Brass, #8-32 UNC-2A x 1 long
M24560/5-019	Stud	4	ASTM B 21	Brass
M24560/5-020	Washer, flat	4	COML	Brass, 3/8 ID x 7/8 OD x 0.070 thick
M24560/5-021	Washer, lock	3	COML	Phosphor bronze #8
M24560/5-022	Screw, mach R.H.	1	COML	#6-32 UNC-2A x 3/16 long
M24560/5-023	Bolt, hex head	4	COML	Brass 5/16 UNC-2A x 2-1/2 long
M24560/5-024	Nut, hex	8	COML	Brass, 5/16-18 UNC-2B
M24560/5-025	Plug	1	COML	Brass, 1/8 IPS
M24560/5-026	Gasket	1	MIL-R-900	Rubber, ¼ x ¼ x length to suit
M24560/4-010	Base	1	ASTM B 584	Bronze
M24560/4-011	Base ring	1	ASTM B 584	Bronze
M24560/4-012	Top	1	ASTM B 584	Bronze
M24560/4-014	Pin	4	ASTM B 16	Brass, 1/16 dia x length to suit 2/
M24560/4-016	Hinge pin	4	ASTM B 16	Brass
M24560/4-023	Washer (upper)	1	COML	Teflon
M24560/4-024	Washer (lower)	1	COML	Teflon
	Lamp	12	COML	15T7C
M24560/27	Lampholder assembly	2	MIL-DTL-24560/27	
M19622/1-002	Stuffing tube	1	MIL-S-19622/1	
M24560/17-001	Lens	1	MIL-L-24560/17	Clear

1/ Part numbers M24560/5-010 through M24560/5-026 were assigned for reference purposes only.
2/ Pin M24560/4-014 may be CRES in lieu of brass.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Preparing activity:
Navy - SH
(Project 6220-N384)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:55Z
Check the source to verify that this is the current version before use.