INCH-POUND
MIL-L-24560/10B(SH)
17 August 1990
SUPERSEDING
MIL-L-24560/10A(SH)
19 October 1981

MILITARY SPECIFICATION SHEET

# LIGHT, NAVIGATION, MASTHEAD, CLEAR, 120 VOLTS, 50 WATTS, ONE LAMP, SYMBOL 172.2

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-L-24560(SH).

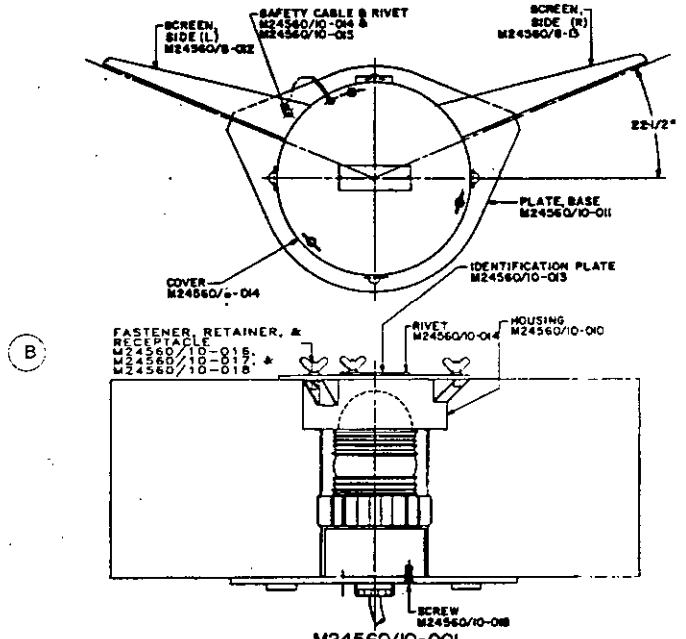



FIGURE 1. Masthead light assembly.

All dimensions are in inches.
For tolerances other than those specified herein, see MIL-L-24560.

Ⓑ denotes changes.

AMSC N/A FSC 6220
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:56Z
Check the source to verify that this is the current version before use.

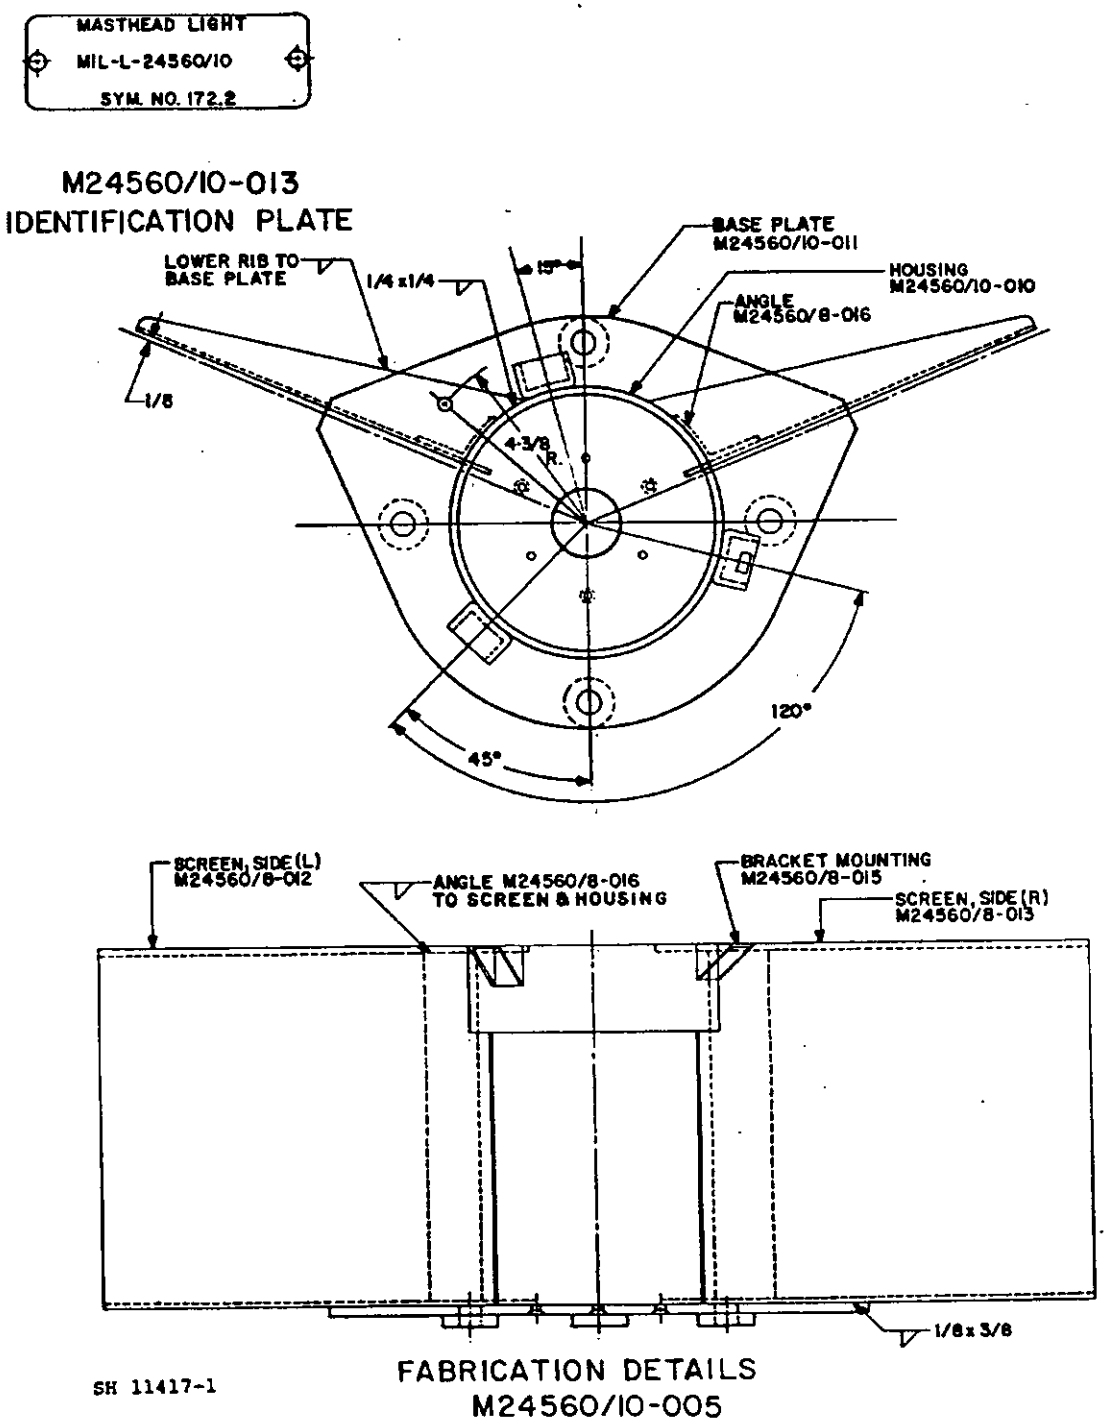



FIGURE 2. Identification plate and fabrication details.



Source: https://assist.dla.mil -- Downloaded: 20260-19T22:56Z
Check the source to verify that this is the current version before use.


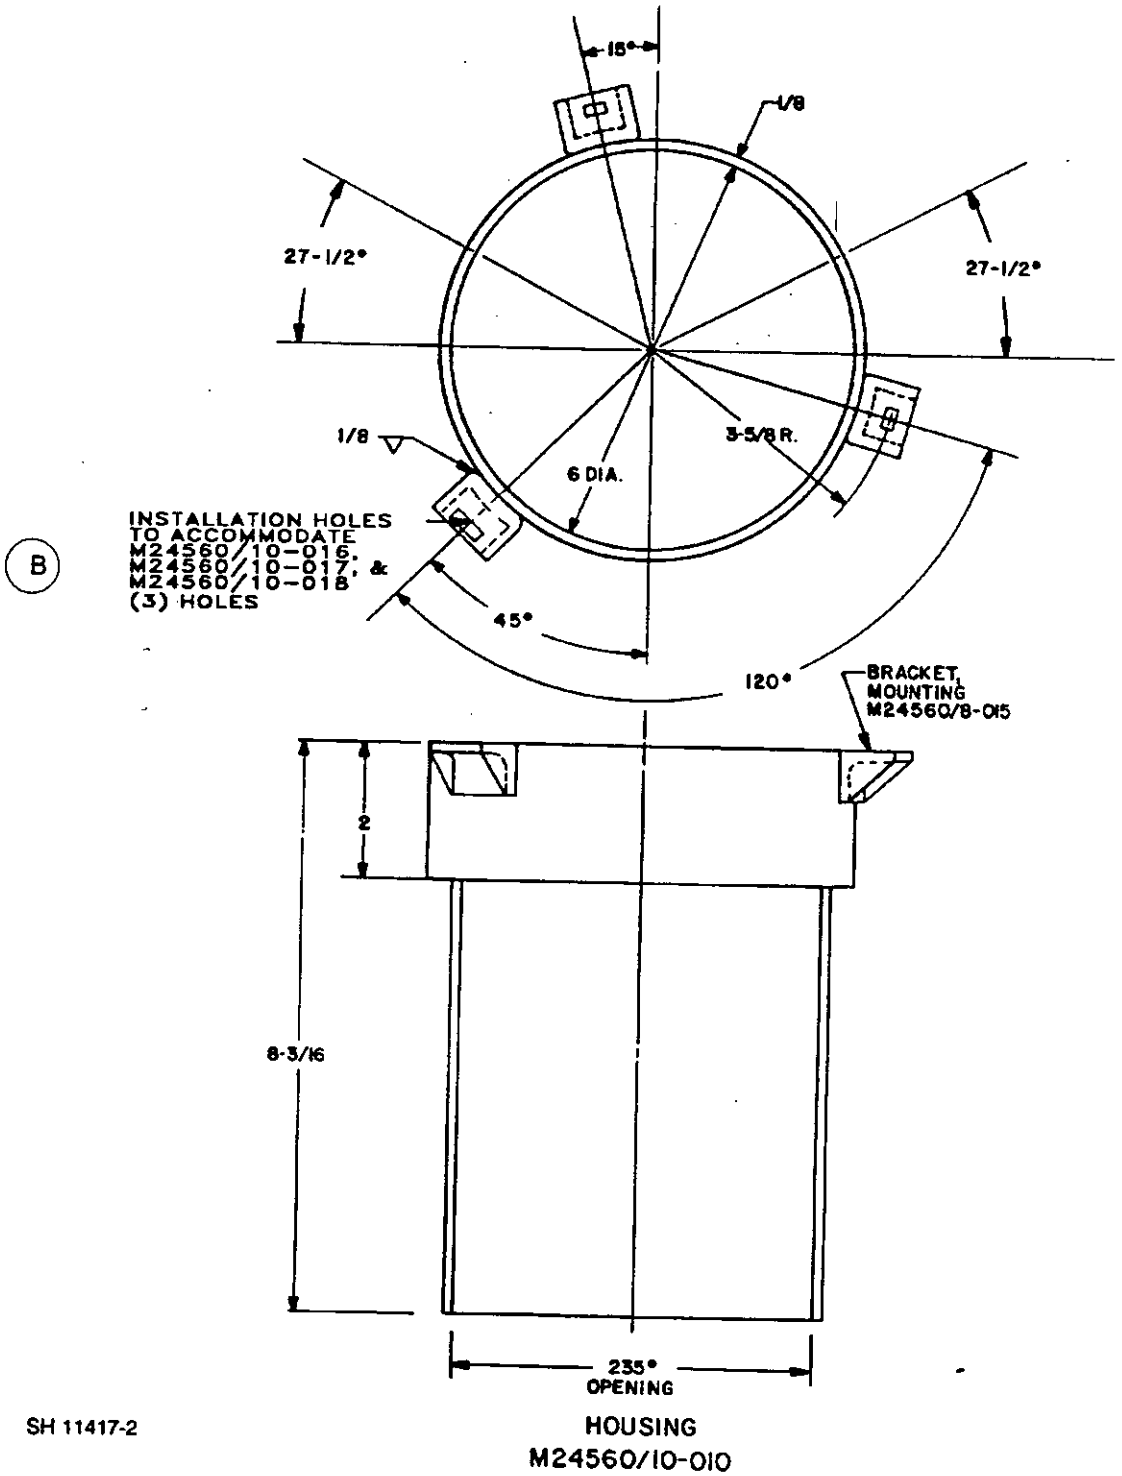



FIGURE 3. Housing.




Source: https://assist.dla.mil -- Downloaded: 202610-19T22:56Z
Check the source to verify that this is the current version before use.

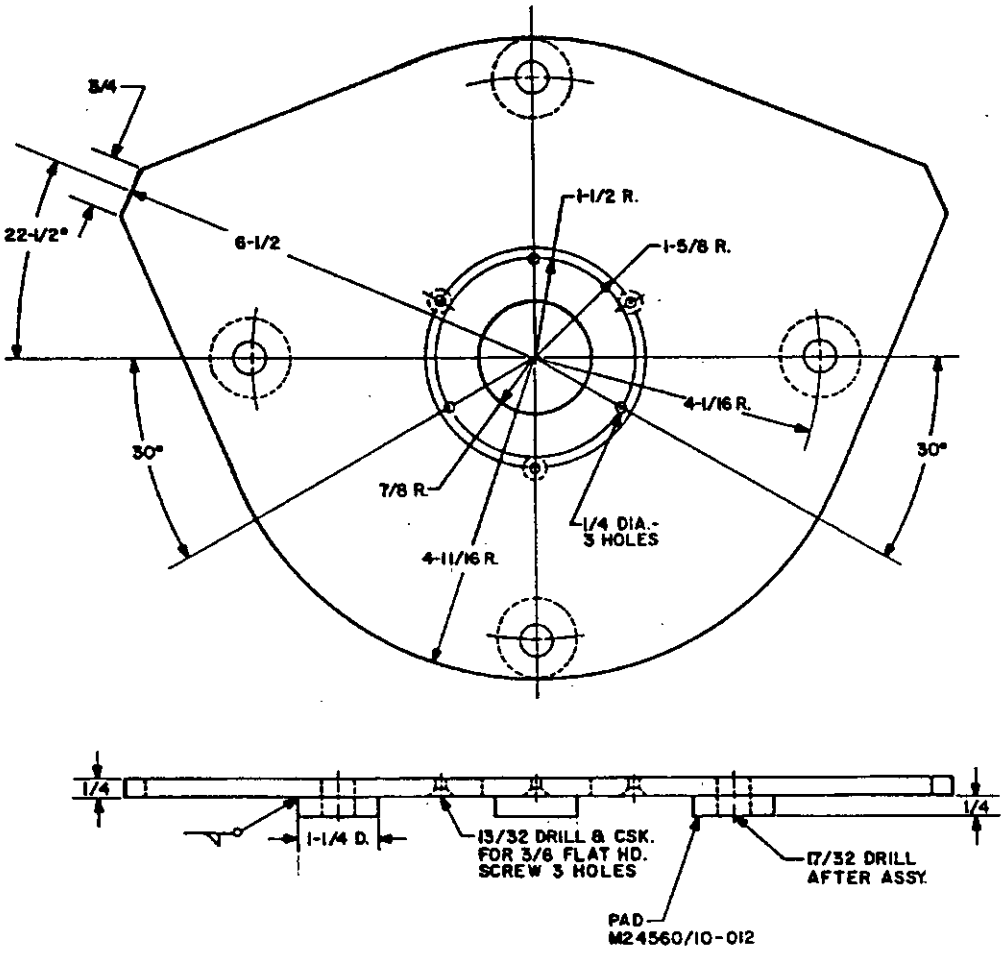


BASE PLATE
M24560/10-011

MOUNTING BOLTS SHALL BE 1/2-
12 HEX. HD.





SH 11417-3

MOUNTING DIMENSIONS


FIGURE 4. Base plate and mounting dimensions.




Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:56Z
Check the source to verify that this is the current version before use.

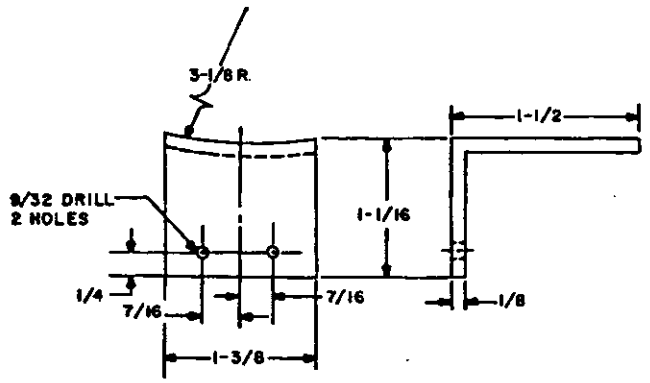


BRACKET ANGLE
M24560/10-019

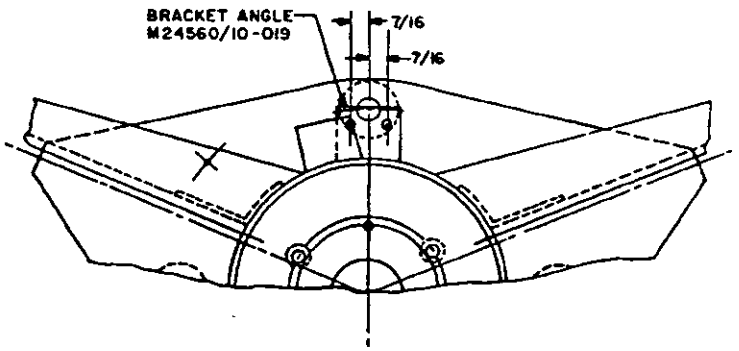

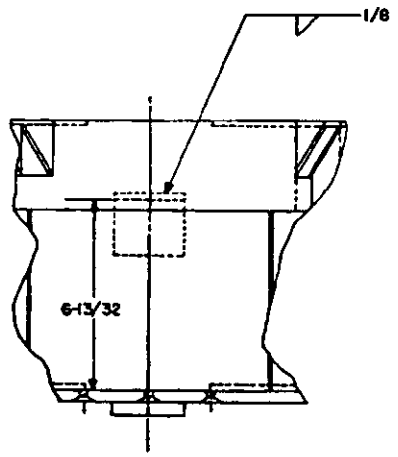
LOCATION & MOUNTING OF BRACKET ANGLE
M24560/10-019

SH 11417-4

FIGURE 5. Location and mounting of bracket angle.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:56Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

DESIGN:
Electrical rating: 120 volts, 60 hertz, 50 watts.
Dimensions and configuration: See figures.
Enclosure: Splashproof (type I).
Parts: See table I.
First article: Examination of product, magnetic permeability, operation, vibration, shock, salt spray.

GENERAL INFORMATION: Military part numbers and general information are as follows:

(a) Military part numbers: M24560/10-001 - light assembly, symbol 172.2.
M24560/10-005 - light shield assembly

(B) (b) Weight: The weight of the light assembly shall be not greater than 18 pounds.

NOTES:

(B) 1. 1/4-turn fastener shall be No. 85 stainless steel wing head with retainer and receptacle, Southco, Inc., Concordville, PA, or equivalent.

(B) 2. Anodize in accordance with MIL-A-8625, type II, class 2. Finish shall be as follows:

(a) Apply two coats epoxy-polyamide primer in accordance with MIL-P-24441/1, type I.
(b) Apply two coats epoxy-polyamide coating in accordance with MIL-P-24441/4, type I. Color shall be lusterless black, FED-STD-595 number 37038, or equivalent.

3. Light shield assembly M24560/10-005 consists of all parts listed in table I except the light assembly.

TABLE I. Parts.

| Part number 1/ | Part name | Qty. | Specification | Additional information |
|---|---|---|---|---|
| M24560/10-010 | Housing | 1 | COML | AL, 5052-H32 |
| M24560/10-011 | Base Plate | 1 | COML | AL, 5052-H32 |
| M24560/10-012 | Pad | 4 | COML | AL, 5052-H32 |
| M24560/10-013 | Identification plate | 1 | MIL-P-15024 | AL, type H normal service of MIL-P-15024/5 |
| M24560/10-014 | Rivet | 4 | COML | AL |
| M24560/10-015 | Safety cable | 1 | COML | |

See footnote at end of table.



Source: https://assist.dla.mil -- Downloaded: 20261O-19T22:56Z
Check the source to verify that this is the current version before use.

TABLE I. Parts - Continued.

| Part number 1/ | Part name | Qty. | Specification | Additional information |
|---|---|---|---|---|
| M24560/10-016 | Fastener | 3 | COML | See note 1 |
| (B) M24560/10-017 | Retainer | 3 | COML | See note 1 |
| (B) M24560/10-018 | Receptacle | 3 | COML | See note 1 |
| M24560/10-019 | Bracket angle | 1 | COML | AL, 5052-H32 |
| (B) M24560/10-020 | Screw, mach R.H. | 3 | COML | CRES, 3/8-16 UNC-2A x 5/8 long |
| M24560/8-012 | Side screen (left) | 1 | COML | AL, 5052-H32 |
| M24560/8-013 | Side screen (right) | 1 | COML | AL, 5052-H32 |
| M24560/8-014 | Cover | 1 | COML | AL, 5052-H32 |
| M24560/8-015 | Bracket | 3 | COML | AL, 5052-H32 |
| M24560/8-016 | Angle | 2 | COML | AL, 5052-H32 |
| M24560/2-001 | Light assembly - clear | 1 | MIL-L-24560/2 | Symbol 114.1 |

1/ Part numbers M24560/10-010 through M24560/10-020 were assigned for reference purposes only.

Preparing activity:
Navy - SH
(Project 6220-N358-07)



Source: https://assist.dla.mil -- Downloaded: 202610-19T22:56Z
Check the source to verify that this is the current version before use.