
MILITARY SPECIFICATION SHEET

LIGHT, NAVIGATION, PORTABLE TOWING, CLEAR, 120 VOLTS, 50 WATTS, ONE LAMP, SYMBOL 206.2

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the light described herein shall consist of this specification and the latest issue of MIL-L-24560(SH).

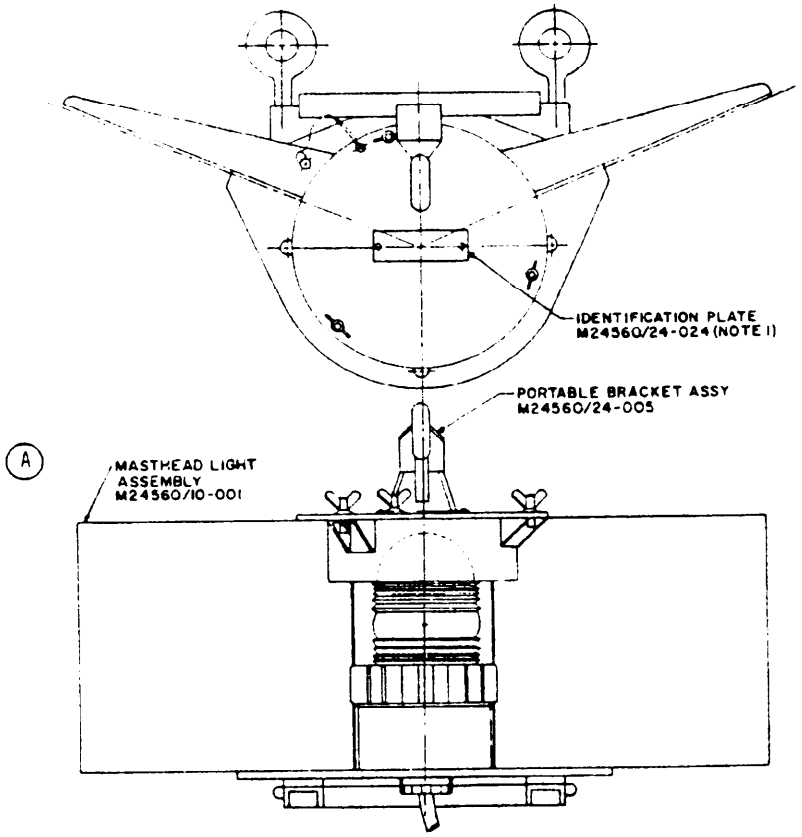


M24560/24-001
ASSEMBLY - PORTABLE TOWING LIGHT - SYM 206 2

All dimensions in inches.
For tolerances, other than specified herein, see paragraph 3.4.1.1 of MIL-L-24560.

(A) denotes changes.

FSC 6220

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:59Z
Check the source to verify that this is the current version before use.

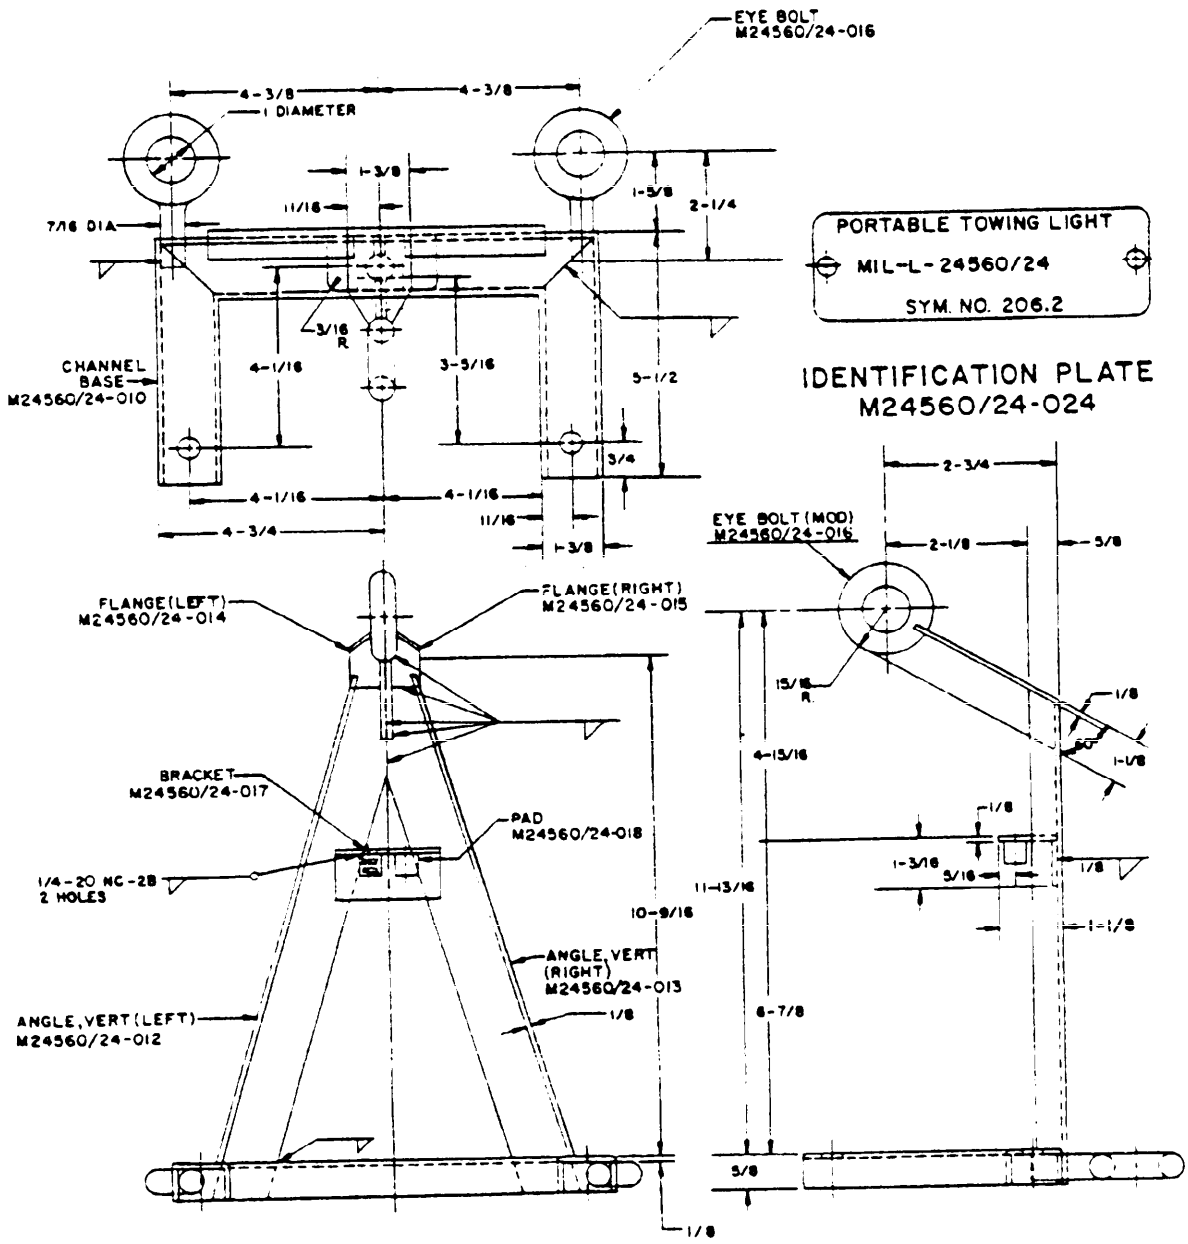

ASSEMBLY, PORTABLE BRACKET
M24560/24-005

SH111432-1

Source: https://assist.dla.mil -- Downloaded: 202610-19T22:59Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

DESIGN:
Electrical rating: 120 volts, 60 Hertz, 50 watts
Dimensions and configuration: See figures
Enclosure: Splashproof (type I)
Parts: See table I
First article: Examination of product, magnetic permeability, operation, vibration, shock, salt spray.

GENERAL INFORMATION: Assignment of Military part numbers and general information is as follows:

a. Military part number: M24560/24-001 - (light assembly - sym 206.2)
M24560/24-005 - portable bracket assembly
b. Supersedes part number MS17789-2 (symbol 206.1 of MS17789)
c. Weight: The light assembly shall weigh 10.5 pounds maximum.

NOTES:
1. Remove existing identification plate on masthead light assembly and replace with M24560/24-024 identification plate.

TABLE I. Parts.

Part number 1/	Part name	Quantity	Specification	Additional information
M24560/24-010	Channel, base	1	COML	Aluminum 1-3/8 x 5/8 x 1/8
M24560/24-012	Angle, vertical (left)	1	COML	Aluminum 1-1/8 x 5/8 x 1/8
M24560/24-013	Angle, vertical (right)	1	COML	Aluminum 1-1/8 x 5/8 x 1/8
M24560/24-014	Flange, (left)	1	COML	Aluminum 1-1/8 x 5/8 x 1/8
M24560/24-015	Flange, (right)	1	COML	Aluminum 1-1/8 x 5/8 x 1/8
M24560/24-016	Eye, bolt	3	COML	Aluminum
M24560/24-017	Bracket	1	COML	Aluminum
M24560/24-018	Pad	2	2017-T4	Aluminum, 1/2 dia x 3/8 LG
M24560/24-019	Screw, hex hd	2	COML	CRES, 1/4-20 NC-2A x 5/8 LG
M24560/24-020	Washer, lock	2	COML	CRES, 1/4 inch
M24560/24-021	Bolt	3	COML	CRES, 1/2-12 NC-2A x 1/2 LG
M24560/24-022	Washer, lock	3	COML	CRES, 1/2 inch
M24560/24-023	Nut, hex	3	COML	CRES, 1/2-12 NC-2B
M24560/24-024	Identification plate	1	MIL-P-15024	Aluminum, type H, normal service of MIL-P-15024/5
M24560/10-001	Masthead light assembly	1	MIL-L-24560/10	Clear Sym 172.1

1/ Part numbers M24560/24-010 through M24560/24-024 were assigned for reference purposes only.

Preparing activity:
Navy - SH
(Project 6220-N300)

Source: https://assist.dla.mil -- Downloaded: 202610-19T22:59Z
Check the source to verify that this is the current version before use.