INCH-POUND
MIL-L-24560/25(SH)
17 August 1990

MILITARY SPECIFICATION SHEET

LIGHT, TASK, AND SHIELD ASSEMBLY, FOR USE WITH SYMBOL 114.1 AND 115.1 PLASTIC LIGHT FIXTURES

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-L-24560(SH).


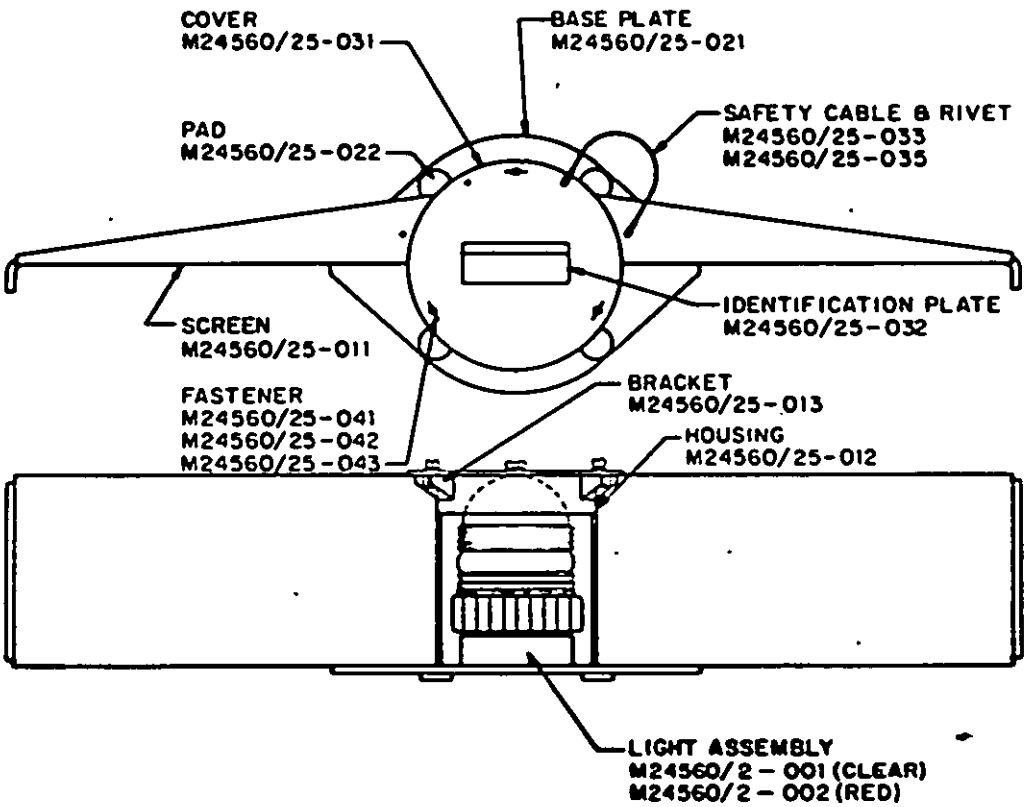


FIGURE 1. Task light assembly.

All dimensions are in inches.
For tolerances other than those specified herein, see MIL-L-24560.

AMSC N/A FSC 6220
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:59Z
Check the source to verify that this is the current version before use.

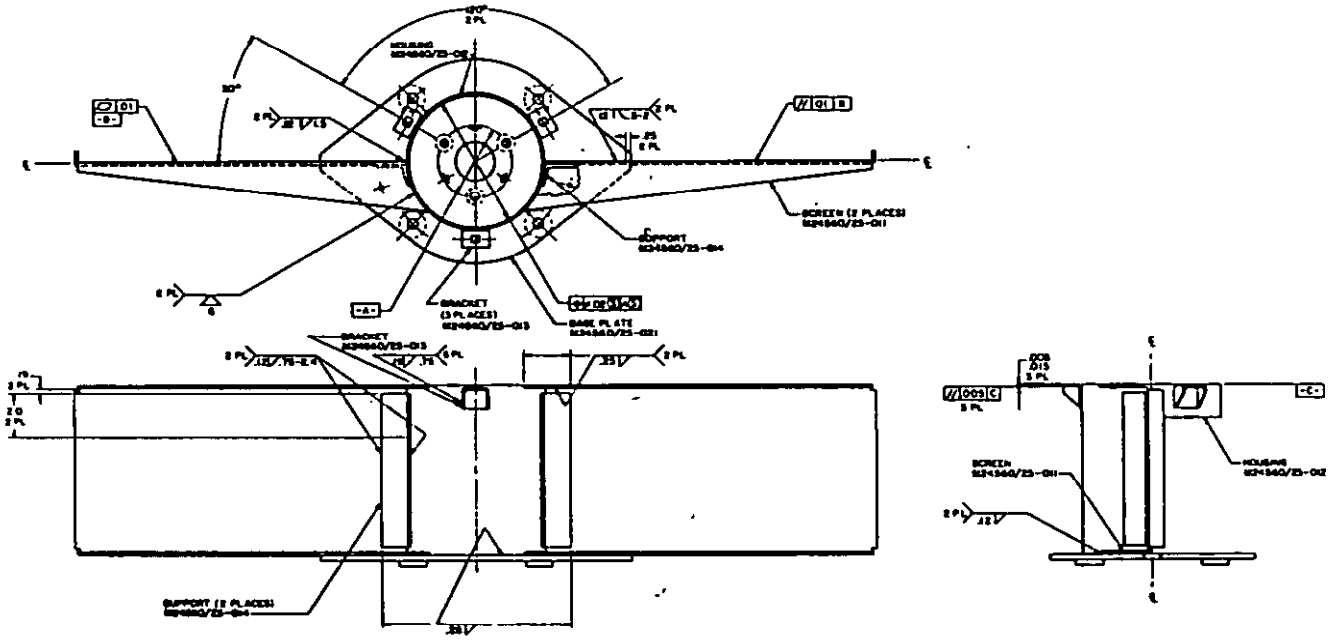


NOTES:

1. Weld in accordance with MIL-W-22248, class 3, using filler metal in accordance with type ER5183, ER5356, or ER5556 of ANSI/AWS-A5.10.
2. Anodize in accordance with MIL-A-8625, type II, class 2.
3. Finish:

   (a) Apply two coats epoxy-polyamide primer in accordance with MIL-P-24441/10, type II.
   (b) Apply two coats epoxy-polyamide coating in accordance with MIL-P-24441/13, type II. Color shall be lusterless black, FED-STD-595 number 37038.

FIGURE 2. Task light shield weldment.

Source: https://assist.dla.mil - Downloaded: 202610-19T22:59Z
Check the source to verify that this is the current version before use.

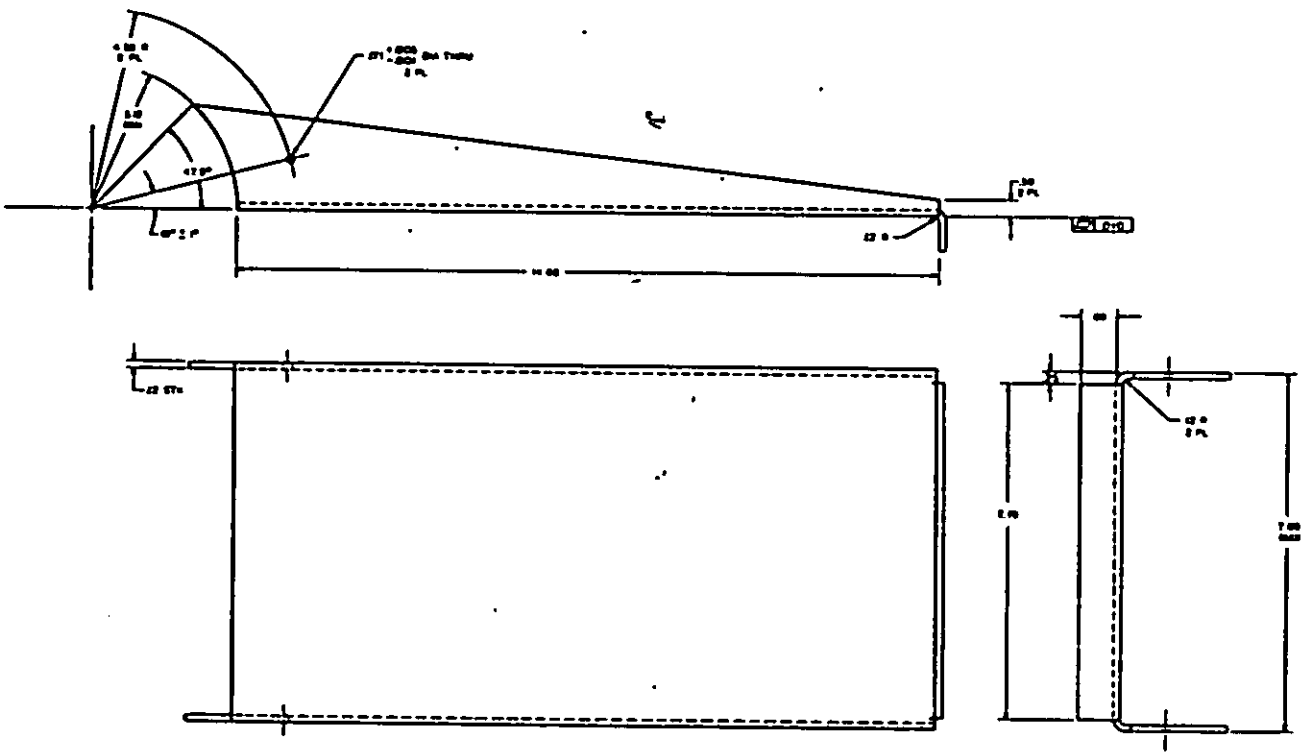


NOTE:

1. Bend reliefs are permissible.

FIGURE 3. Screen.

Source: https://assist.dla.mil -- Downloaded: 202610-19T22:59Z
Check the source to verify that this is the current version before use.

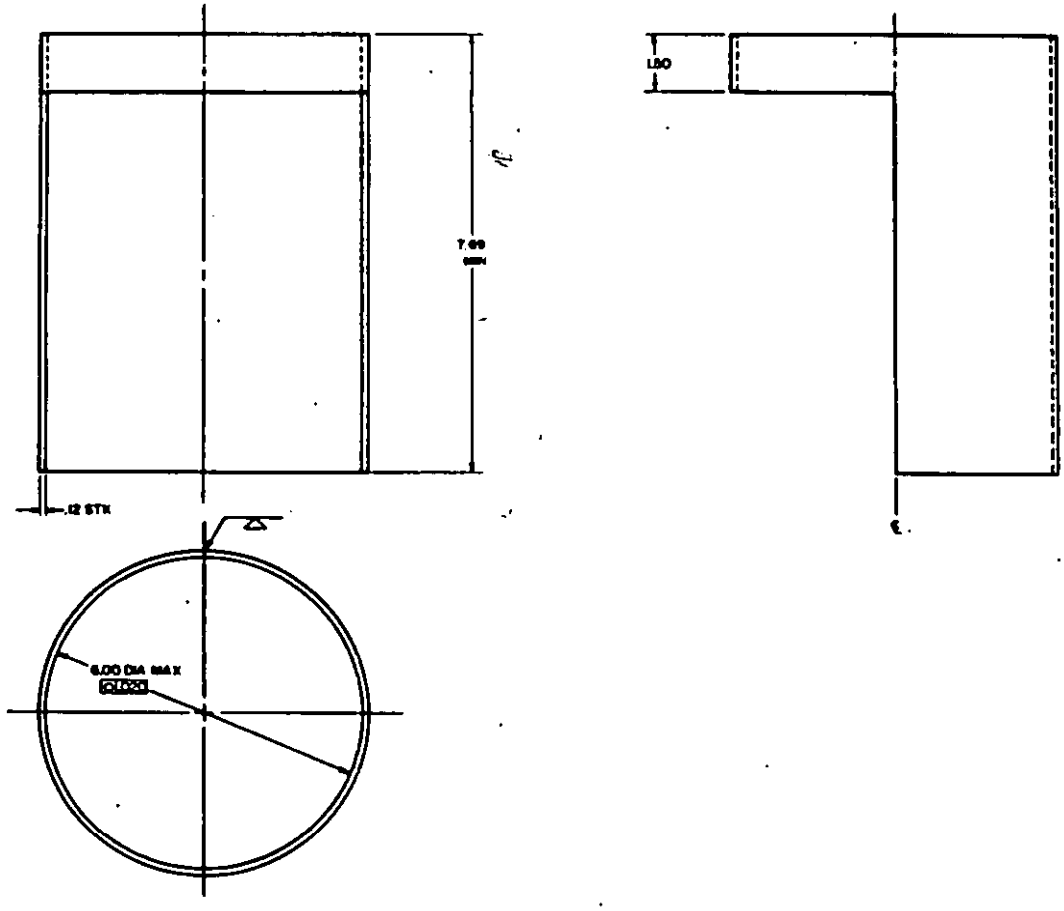


NOTE:

1. Weld in accordance with MIL-W-22248, class 3, using filler metal in accordance with type ER5183, ER5356, or ER5556 of ANSI/AWS A5.10.

FIGURE 4. Housing.

Source: https://assist.dla.mil Downloaded: 202610-19T22:59Z
Check the source to verify that this is the current version before use.

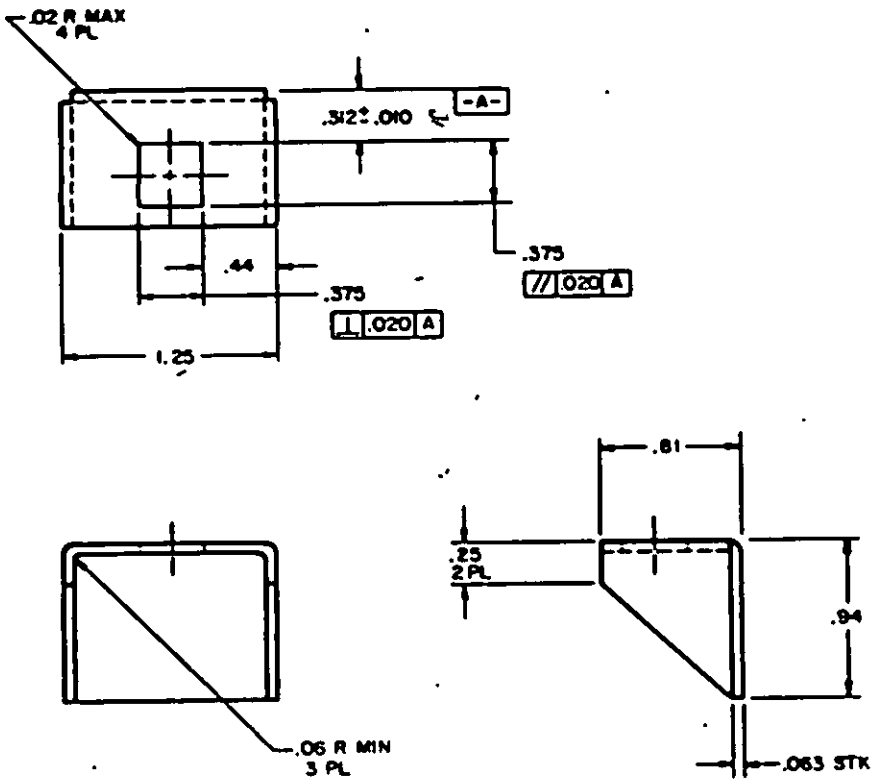

NOTE:

1. Bend reliefs are permissible.

FIGURE 5. Bracket.

Source: https://assist.dla.mil Downloaded: 202610-19T22:59Z
Check the source to verify that this is the current version before use.


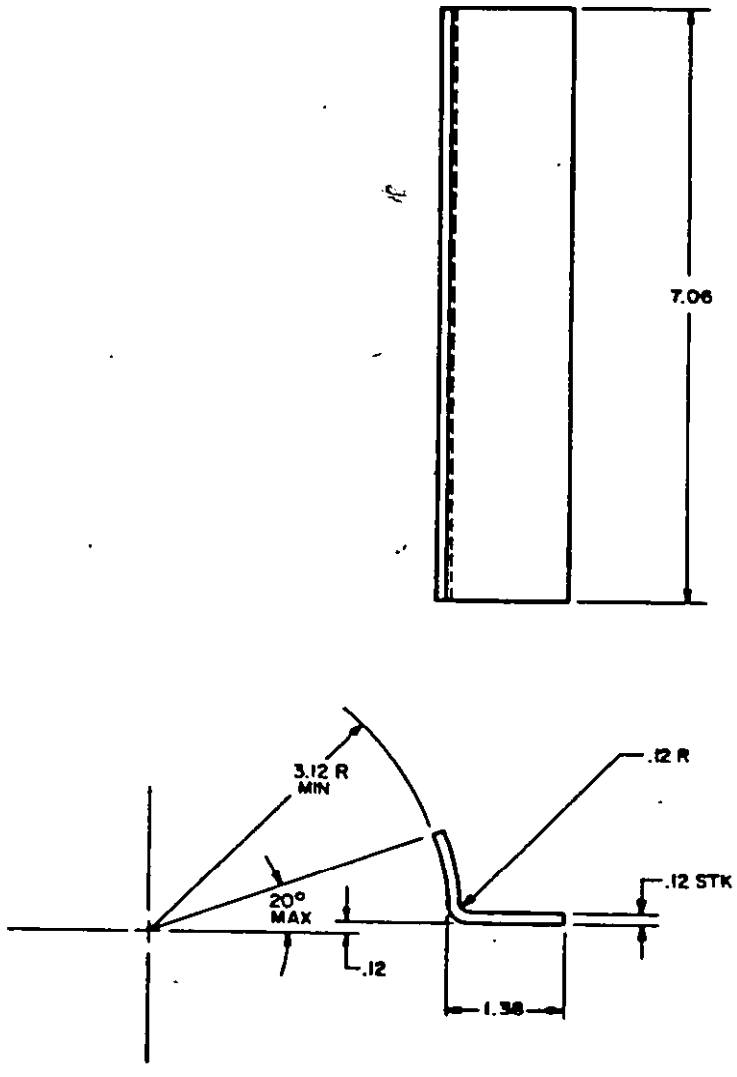


FIGURE 6. Support.

Source: https://assist.dla.mil - Downloaded: 202610-19T22:59Z
Check the source to verify that this is the current version before use.

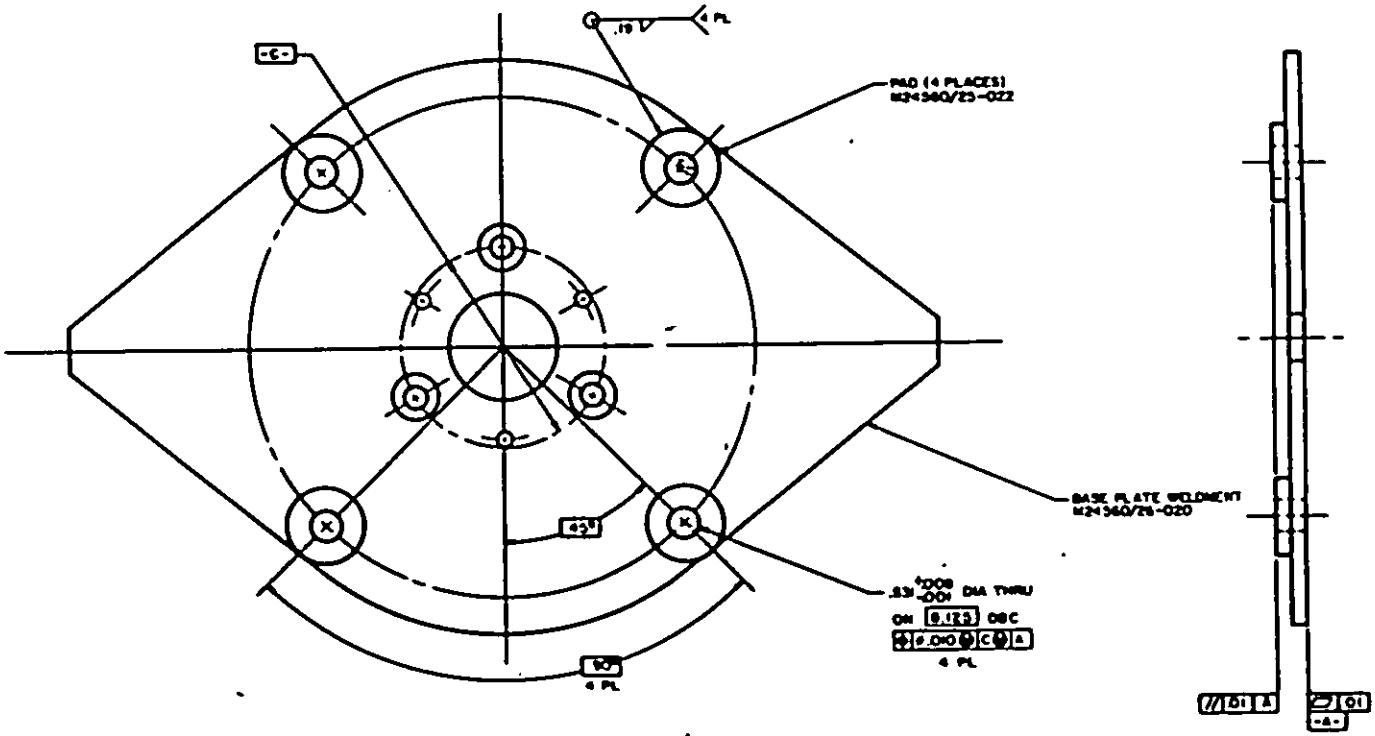

NOTE:

1. Weld in accordance with MIL-W-22248, class 3, using filler metal in accordance with type ER5183, ER5356, or ER5556 of ANSI/AWS A5.10.

FIGURE 7. Base plate weldment.

Source: https://assist.dla.mil - Downloaded: 202610-19T22:59Z
Check the source to verify that this is the current version before use.

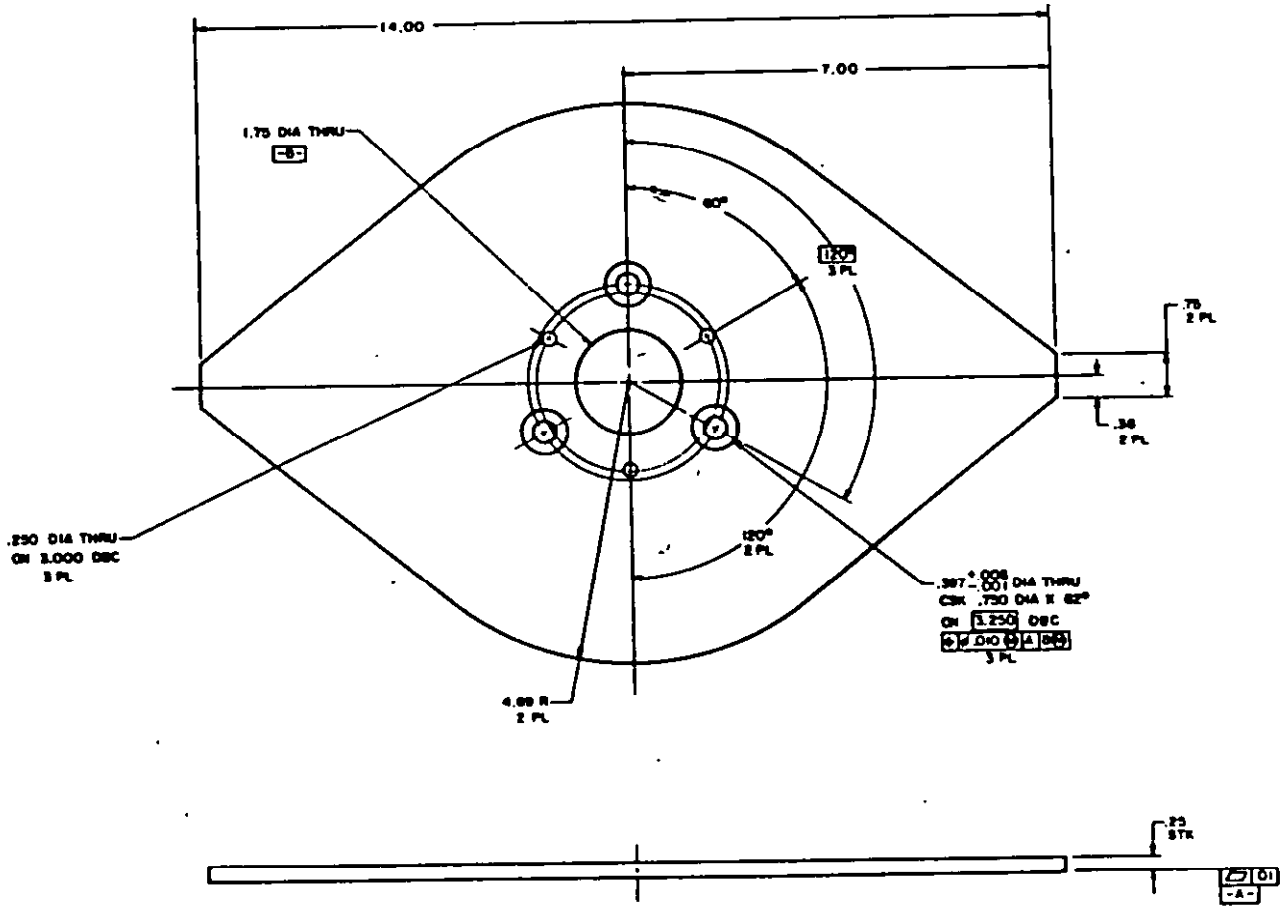


FIGURE 8. Base plate.

Source: https://assist.dla.mil - Downloaded: 202610-19T22:59Z
Check the source to verify that this is the current version before use.


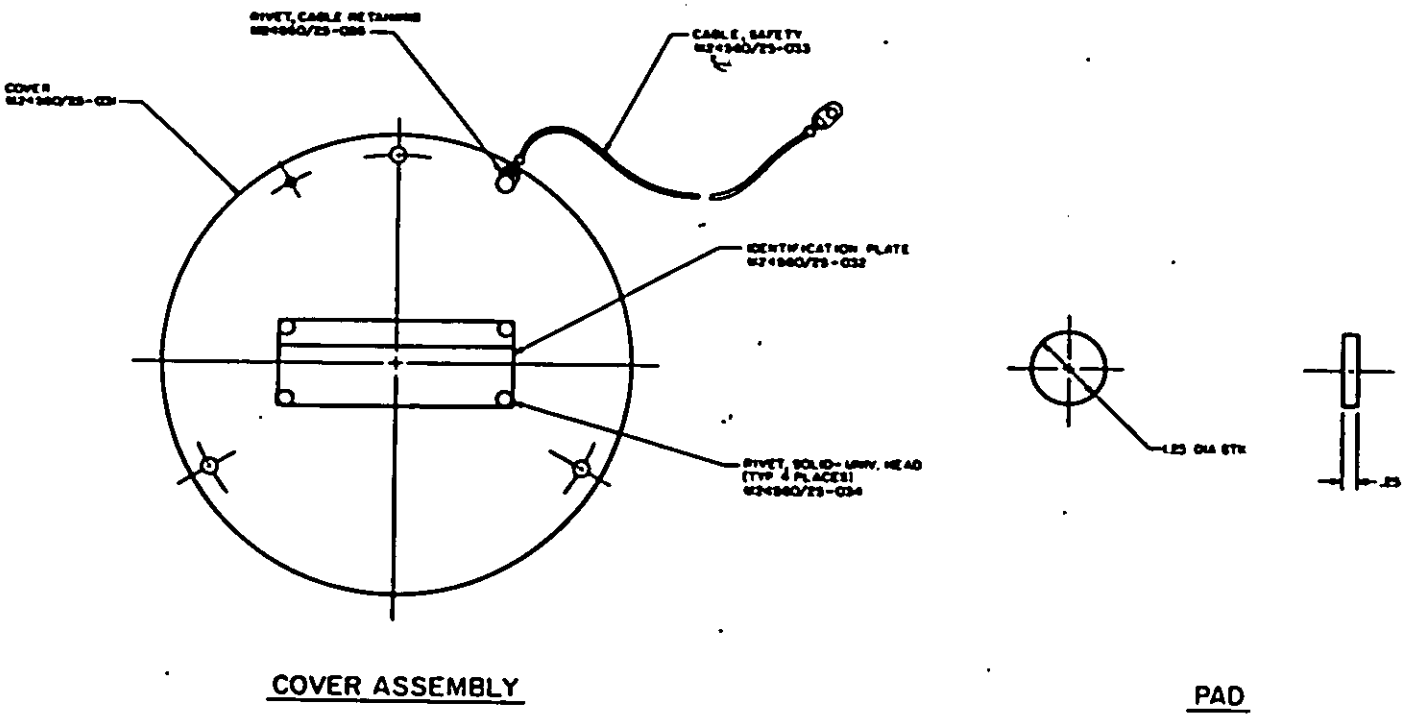


FIGURE 9. Cover assembly and pad.

Source: https://assist.dla.mil Downloaded: 202610-19T22:59Z
Check the source to verify that this is the current version before use.

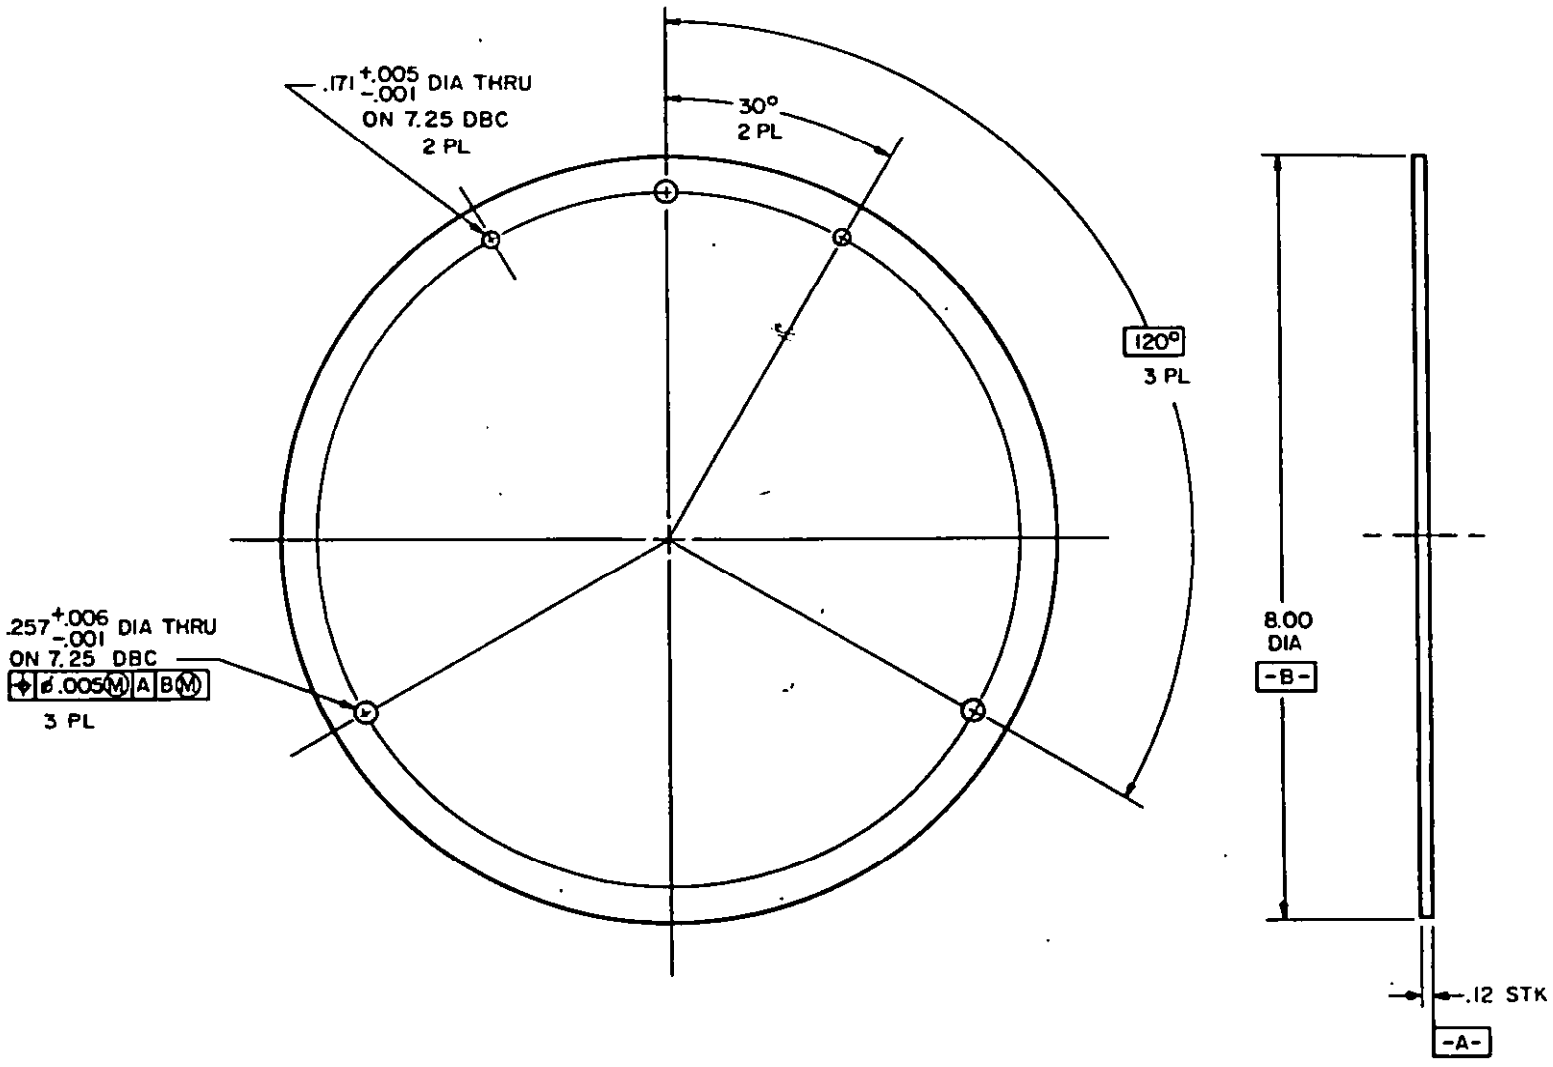


NOTES:

1. Anodize in accordance with MIL-A-8625, type II, class 2.
2. Finish:

   (a) Apply two coats epoxy-polyamide primer in accordance with MIL-P-24441/1, type I.
   (b) Apply two coats epoxy-polyamide coating in accordance with MIL-P-24441/4, type I. Color shall be lusterless black, FED-STD-595 number 37038.

FIGURE 10. Cover.

Source: https://assist.dla.mil Downloaded: 202610-19T22:59Z
Check the source to verify that this is the current version before use.

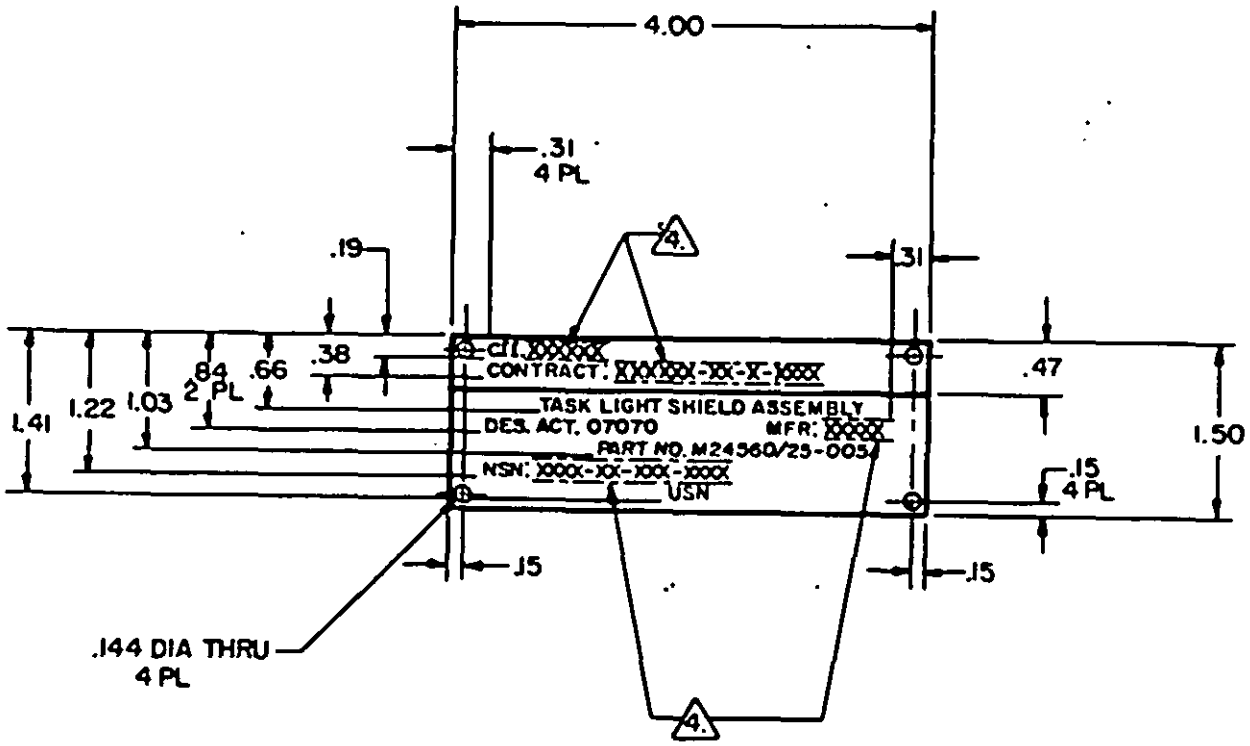


NOTES:

1. Prior to painting, anodize in accordance with MIL-A-8625, type II, class 1.
2. All characters approximately 1/10-inch high.
3. Where locating dimensions are not shown, characters shall be symmetrically positioned at the indicated position.
4. Apply Configuration Item Identifier (CII) number, contract number, Commercial and Government Entity (CAGE) number, and National Stock Number (NSN) as specified by the contracting activity. These numbers are illustrated on the figure as "x's" within phantom lines.

FIGURE 11. Identification plate.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:59Z
Check the source to verify that this is the current version before use.

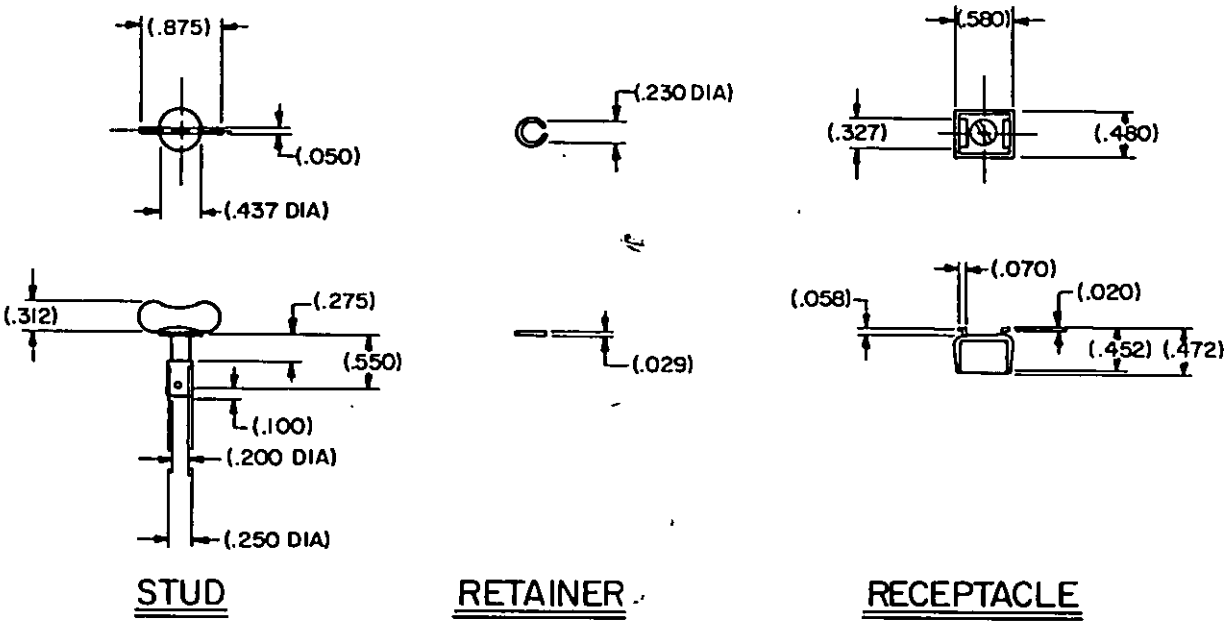

NOTES:

1. Operational requirements:

   (a) Vibration-proof 1/4-turn with locking tension and positive stop.
   (b) Receptacle hole preparation: 0.375 ± 0.005 square hole through 0.063 thick support.
   (c) Stud hole preparation: 0.250 - 0.263 diameter hole through 0.125 thick panel.

2. Mechanical properties:

(a)	Maximum tension without distortion:	60 lbs.
(b)	Locked service tension:	30 lbs.
(c)	Shear strength:	150 lbs.
(d)	Wear life:	5000 - cycles

3. Dimensions in parentheses are for reference only.

FIGURE 12. Fastener.

Source: https://assist.dla.mil Downloaded: 2026-10-19T22:59Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

DESIGN:
Dimensions and configuration: See figures.
Parts: See table I.
First article: Examination of product, magnetic permeability, operation, vibration, shock, salt spray.

GENERAL INFORMATION: Military part numbers and general information are as follows:

(a) Military part numbers: M24560/25-001 - Task light assembly using symbol 114.1 light fixture
M24560/25-002 - Task light assembly using symbol 115.1 light fixture
M24560/25-005 - Task light shield assembly

(b) Weight: The weight of the light assembly shall be not greater than 18 pounds.

NOTE:

1. 1/4-turn fastener, stud no. SQC4-20SS, retainer no. SR4SS, receptacle no. AJW4-55SS by Dzus Fastener Co., Inc., 425 Union Boulevard, West Islip, NY 11795, or equivalent.

TABLE I. Parts.

Part number 1/	Part name	Qty.	Specification	Additional information
M24560/25-010	Task light shield assembly	1		
M24560/25-011	Screen	2	QQ-A-250/7	Aluminum alloy, temper H32
M24560/25-012	Housing	1	QQ-A-250/7	Aluminum alloy, temper H32
M24560/25-013	Bracket	3	QQ-A-250/7	Aluminum alloy, temper H32
M24560/25-014	Support	2	QQ-A-250/7	Aluminum alloy, temper H32
M24560/25-020	Base plate weldment	1		
M24560/25-021	Base plate	1	QQ-A-250/7	Aluminum alloy, temper H32
M24560/25-022	Pad	4	QQ-A-250/7	Aluminum alloy, temper H32
M24560/25-030	Cover assembly	1		
M24560/25-031	Cover	1	QQ-A-250/7	Aluminum alloy, temper H32
M24560/25-032	Identification plate	1	MIL-P-15024	Types A, B, or C; color style IV
M24560/25-033	Cable, safety	1	MS17339	MS17339-1, 6.0 long
M24560/25-034	Rivet, solid - univ. head	4	MS20470	MS20470A4-5-5A, 0.125 dia. x 0.344 long
M24560/25-035	Rivet, cable retaining	1	MS17312	MS17312-1, 0.156 dia. x 0.281 long

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 202610-19T22:59Z
Check the source to verify that this is the current version before use.

TABLE I. Parts - Continued.

Part number 1/	Part name	Qty.	Specification	Additional information
M24560/25-040	Fastener	3	COML	See note 1
M24560/25-041	Stud	3	COML	CRES, 300 series
M24560/25-042	Retainer	3	COML	CRES, 300 series
M24560/25-043	Receptacle	3	COML	CRES, 300 series
M24560/2-001	Navigation light assembly	1	MIL-P-24560/2	Clear, symbol 114.1
M24560/2-002	Navigation light assembly	1	MIL-P-24560/2	Red, symbol 115.1

1/ Part numbers M24560/25-010 through M24560/25-043 were assigned for reference purposes only.

Preparing activity:
Navy - SH
(Project 6220-N358-17)

Source: https://assist.dla.mil Downloaded: 202610-19T22:59Z
Check the source to verify that this is the current version before use.