INCH-POUND
MIL-L-24560/26(SH)
17 August 1990

MILITARY SPECIFICATION SHEET

# LIGHT, TASK, AND SHIELD ASSEMBLY, FOR USE WITH SYMBOL 190.1 AND 192.1 BRASS LIGHT FIXTURES

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-L-24560(SH).


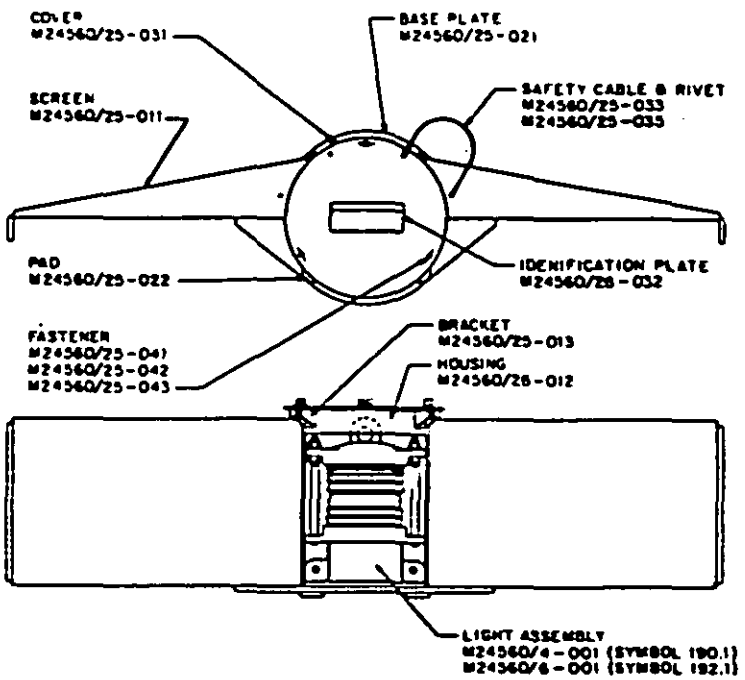



FIGURE 1. Task light assembly.

All dimensions are in inches.
For tolerances other than those specified herein, see MIL-L-24560.

AMSC N/A FSC 6220
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:59Z
Check the source to verify that this is the current version before use.

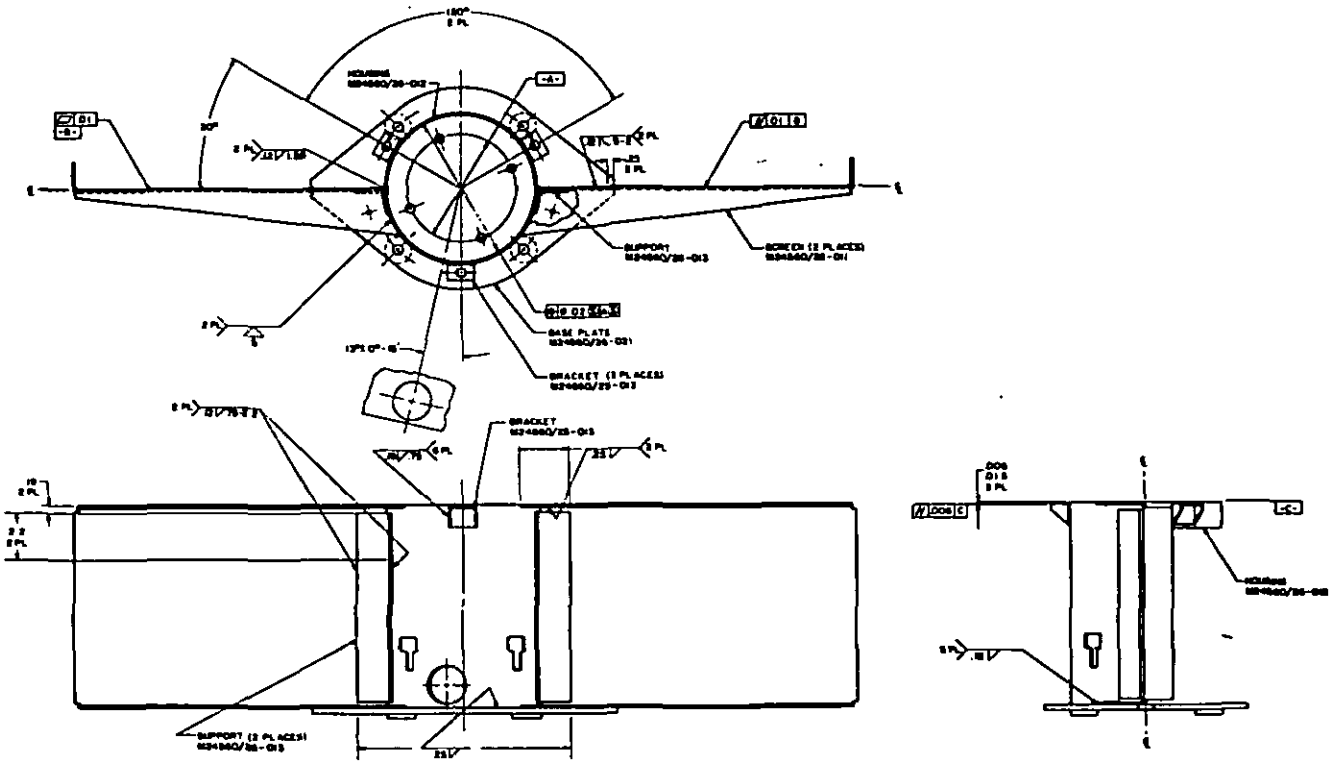

NOTES:


1. Weld in accordance with MIL-W-22248, class 3, using filler metal in accordance with type ER5183, ER5356, or ER5556 of ANSI/AWS A5.10.
2. Anodize in accordance with MIL-A-8625, type II, class 2.
3. Finish:

   (a) Apply two coats epoxy-polyamide primer in accordance with MIL-P-24441/1, type I.
   (b) Apply two coats epoxy-polyamide coating in accordance with MIL-P-24441/4, type I. Color shall be lusterless black, FED-STD-595 number 37038.

FIGURE 2. Task light shield weldment.



Source: https://assist.dla.mil -- Downloaded: 20260-19T22:59Z
Check the source to verify that this is the current version before use.

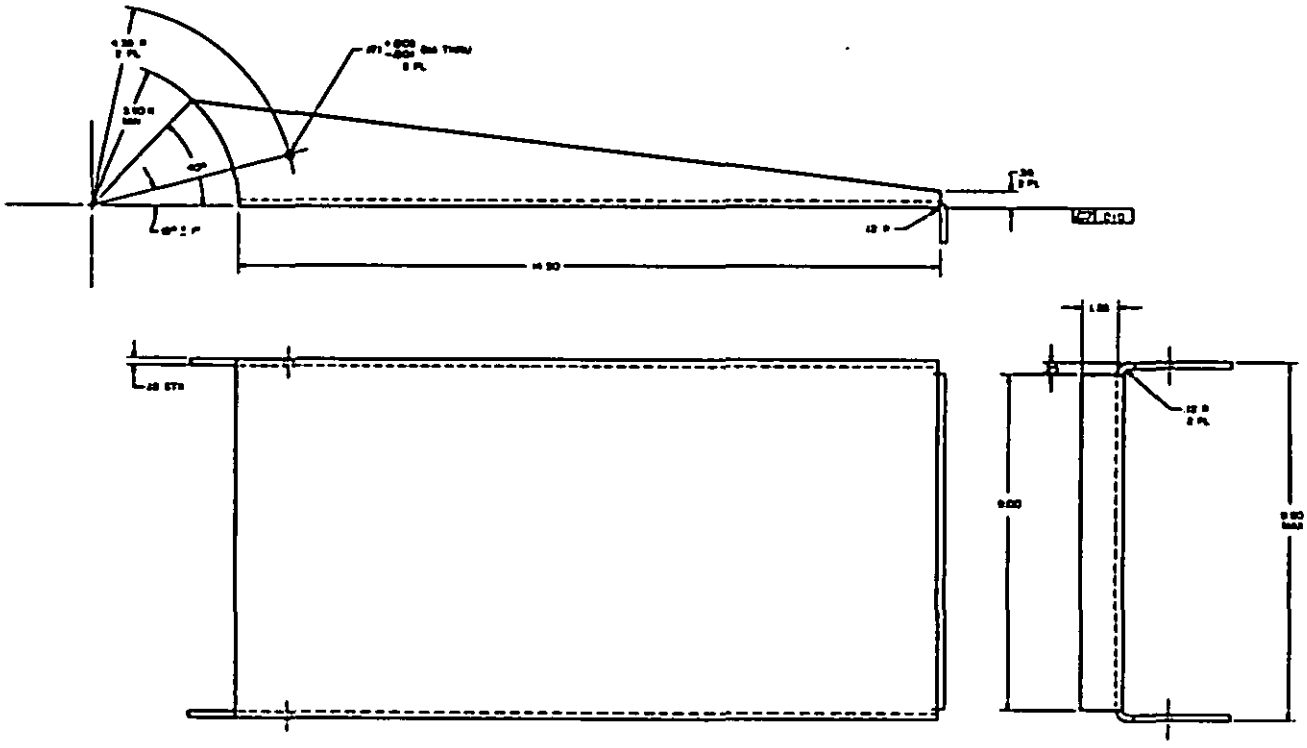


NOTE:

1. Bend reliefs are permissible.

FIGURE 3. Screen.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:59Z
Check the source to verify that this is the current version before use.

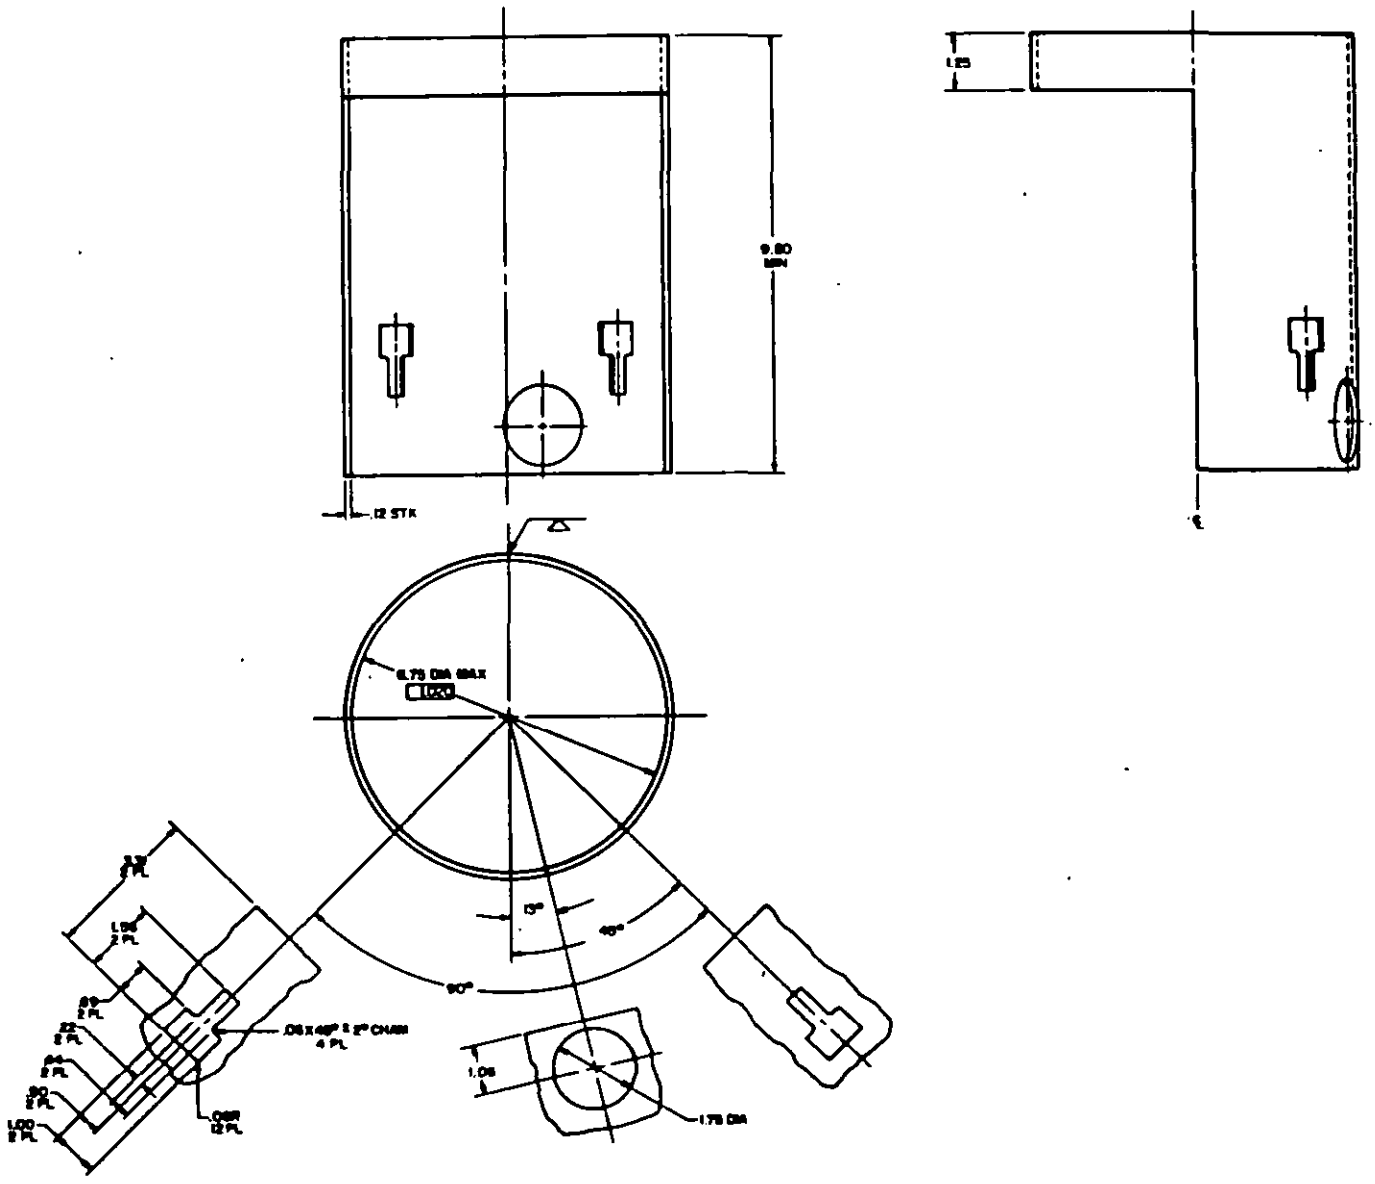

NOTE:

1. Weld in accordance with MIL-W-22248, class 3, using filler metal in accordance with type ER5183, ER5356, or ER5556 of ANSI/AWS A5.10.

FIGURE 4. Housing.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:59Z
Check the source to verify that this is the current version before use.


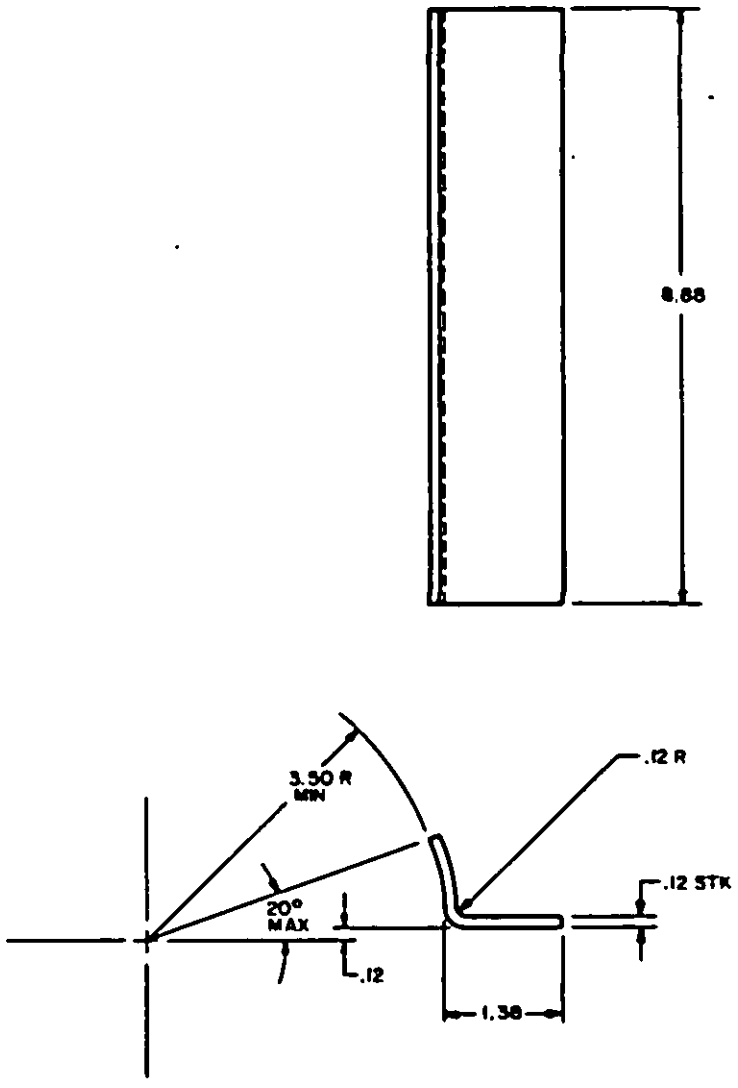



FIGURE 5. Support.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:59Z
Check the source to verify that this is the current version before use.

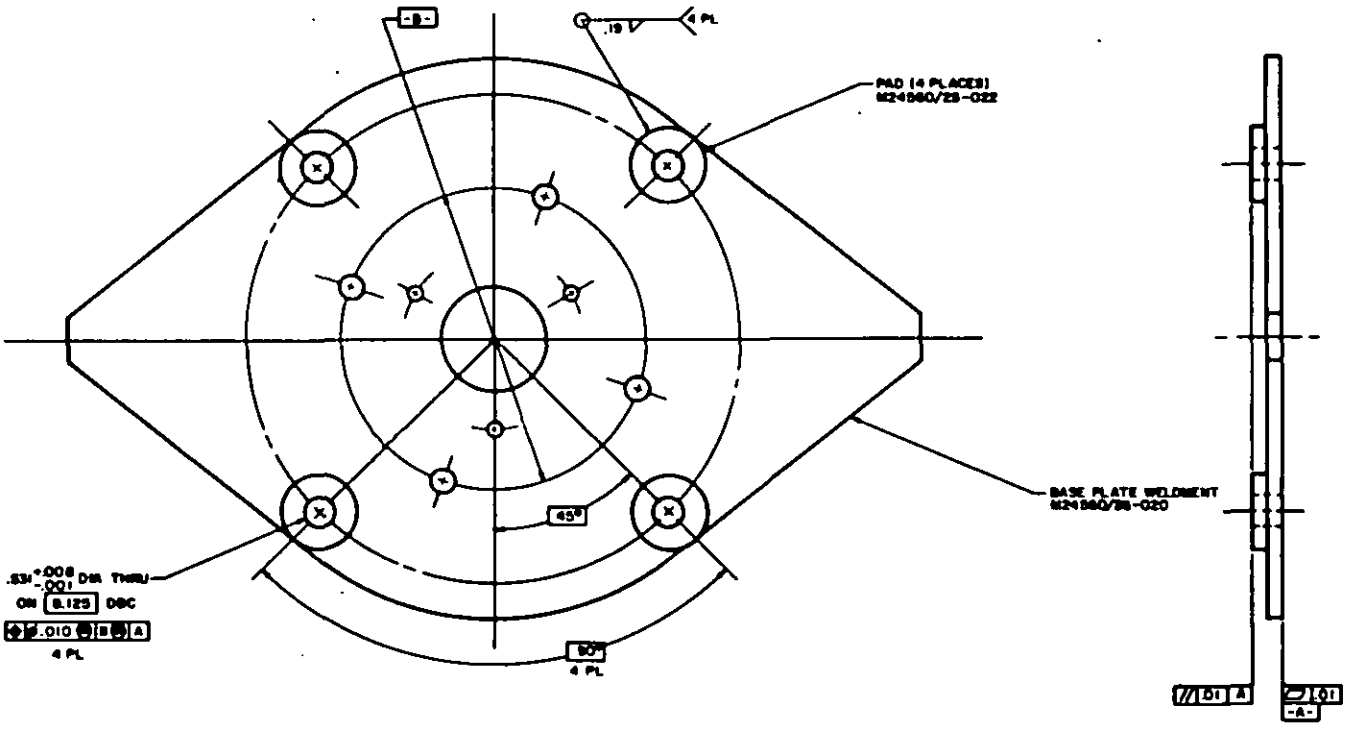


NOTE:

1. Weld in accordance with MIL-W-22248, class 3, using filler metal in accordance with type ER5183, ER5356, or ER5556 of ANSI/AWS A5.10.

FIGURE 6. Base plate weldment.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:59Z
Check the source to verify that this is the current version before use.

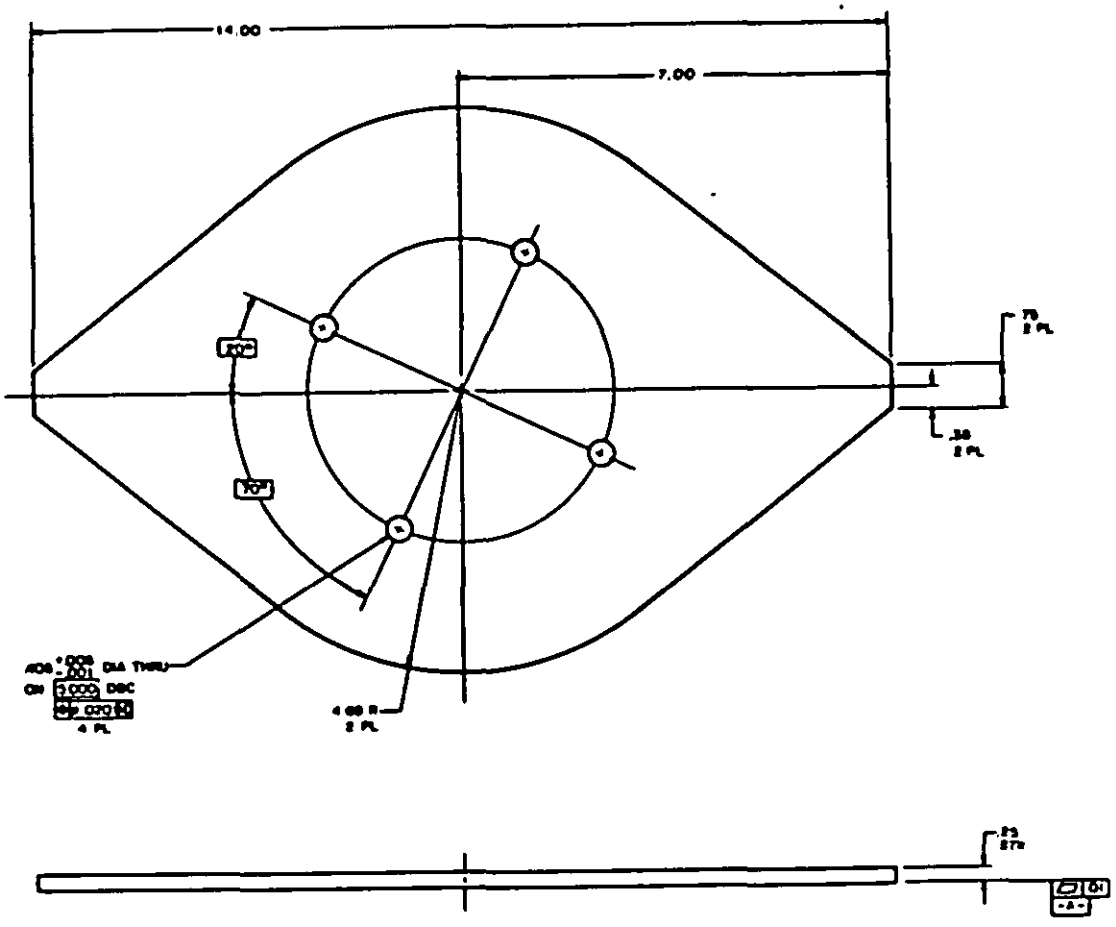



FIGURE 7. Base plate.



Source: https://assist.dla.mil -- Downloaded: 20260-19T22:59Z
Check the source to verify that this is the current version before use.


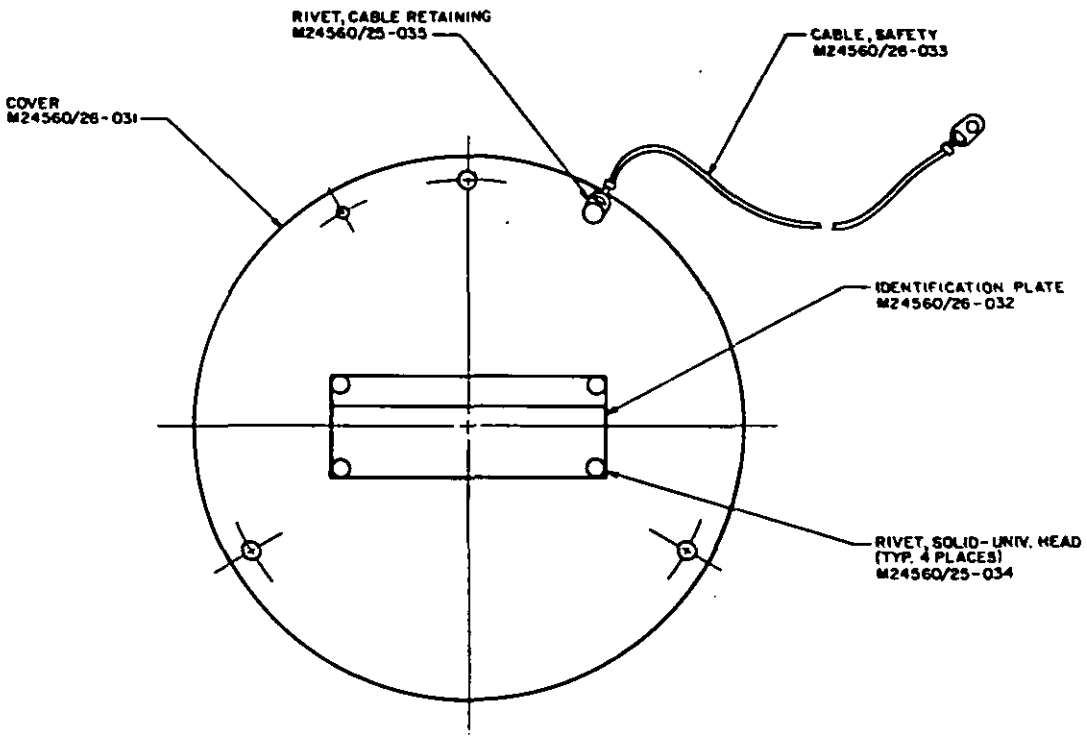



FIGURE 8. Cover assembly.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:59Z
Check the source to verify that this is the current version before use.

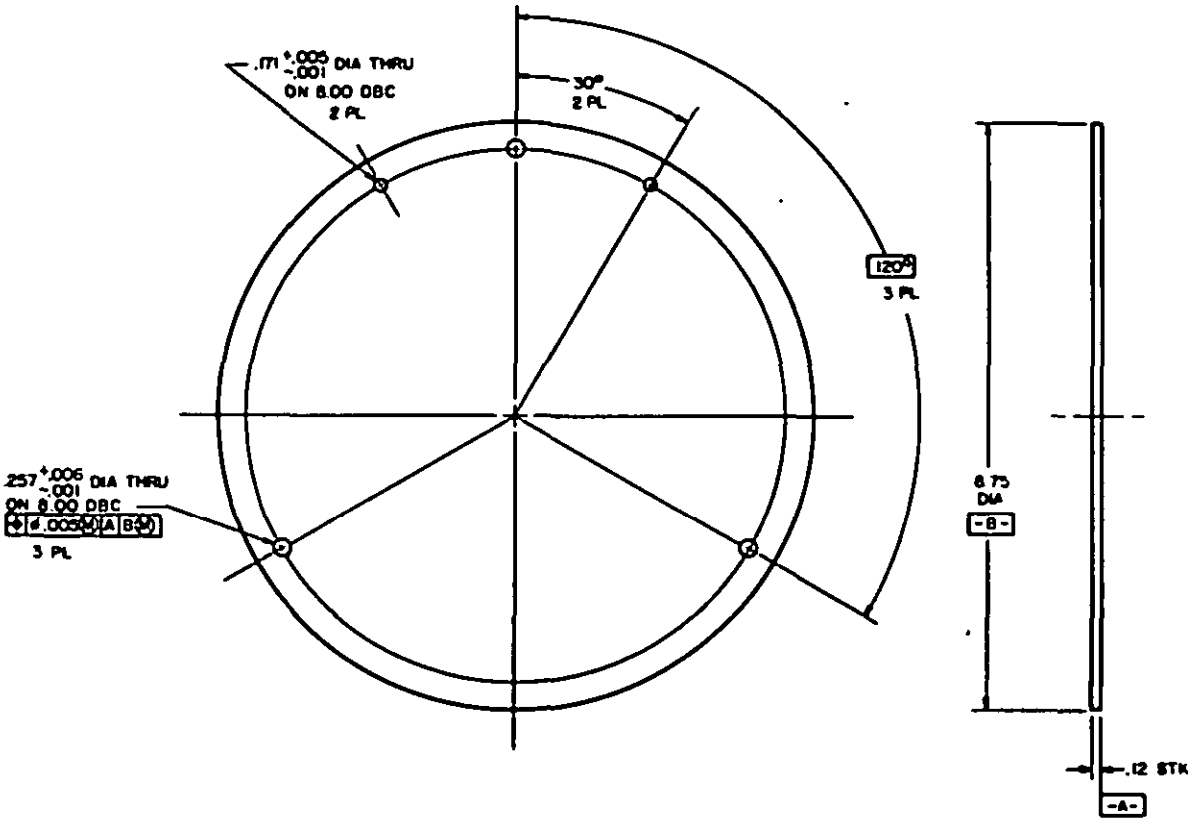


NOTES:


1. Anodize in accordance with MIL-A-8625, type II, class 2.
2. Finish:

   (a) Apply two coats epoxy-polyamide primer in accordance with MIL-P-24441/1, type I.
   (b) Apply two coats epoxy-polyamide coating in accordance with MIL-P-24441/4, type I. Color shall be lusterless black, FED-STD-595 number 37038.

FIGURE 9. Cover.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:59Z
Check the source to verify that this is the current version before use.

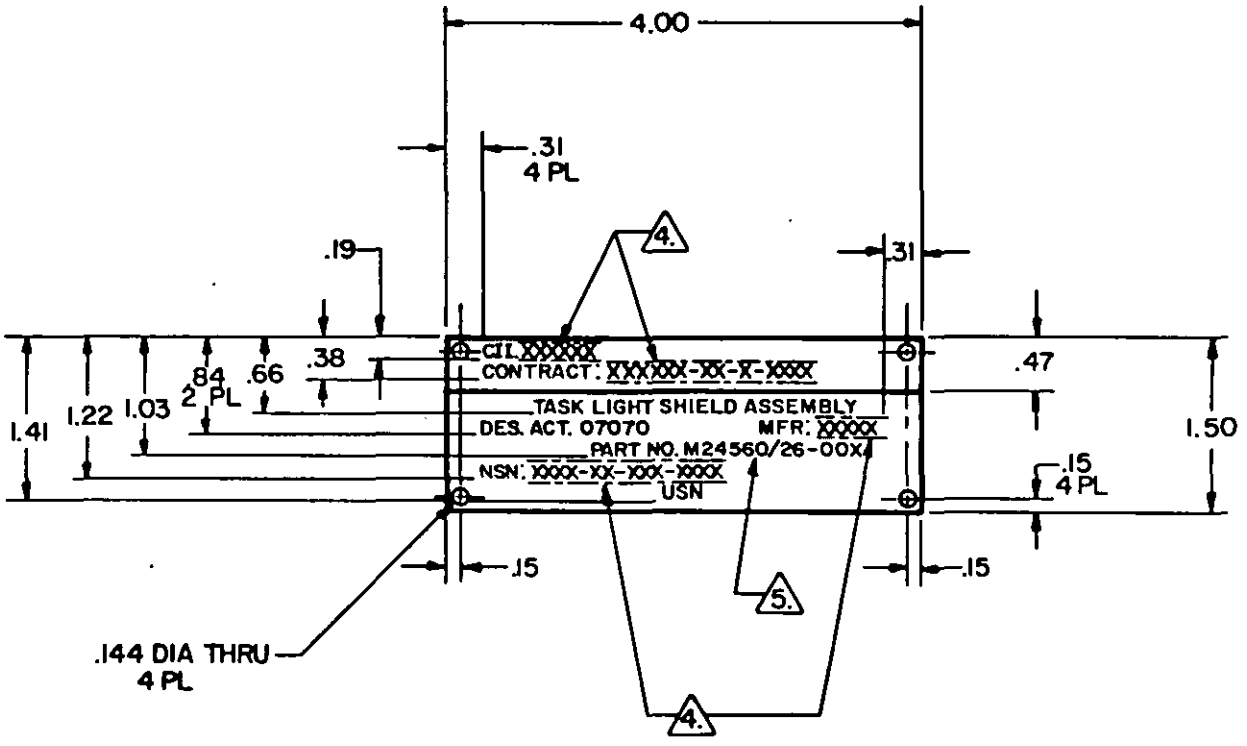


NOTES:

1. Prior to painting, anodize in accordance with MIL-A-8625, type II, class 1.
2. All characters approximately 1/10-inch high.
3. Where locating dimensions are not shown, characters shall be symmetrically positioned at the indicated position.
4. Apply Configuration Item Identifier (CII) number, contract number, Commercial and Government Entity (CAGE) number, and National Stock Number (NSN) as specified by the contracting activity. These numbers are illustrated on the figure as "x's" within phantom lines.
5. Apply part number M24560/26-001, M24560/26-002, or M24560/26-005, as appropriate.

FIGURE 10. Identification plate.



Source: https://assist.dla.mil -- Downloaded: 202610-19T22:59Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

DESIGN:
Dimensions and configuration: See figures.
Parts: See table I.
First article: Examination of product, magnetic permeability, operation, vibration, shock, salt spray.

GENERAL INFORMATION: Military part numbers and general information are as follows:

(a) Military part numbers: M24560/26-001 - Task light assembly using symbol 190.1 light fixture
M24560/26-002 - Task light assembly using symbol 192.1 light fixture
M24560/26-005 - Task light shield assembly

(b) Weight: The weight of the light assembly shall be not greater than 28 pounds.

NOTE:

1. 1/4-turn fastener, stud no. SQC4-20SS, retainer no. SR4SS, receptacle no. AJW4-55SS by Dzus Fastener Co., Inc., 425 Union Boulevard, West Islip, NY 11795, or equivalent.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:59Z
Check the source to verify that this is the current version before use.

TABLE I. Parts.

| Part number 1/ | Part name | Qty. | Specification | Additional information |
|---|---|---|---|---|
| M24560/26-010 | Task light shield weldment | 1 | | |
| M24560/26-011 | Screen | 2 | QQ-A-250/7 | Aluminum alloy, temper H32 |
| M24560/26-012 | Housing | 1 | QQ-A-250/7 | Aluminum alloy, temper H32 |
| M24560/26-013 | Support | 2 | QQ-A-250/7 | Aluminum alloy, temper H32 |
| M24560/26-020 | Base plate weldment | 1 | | |
| M24560/26-021 | Base plate | 1 | QQ-A-250/7 | Aluminum alloy, temper H32 |
| M24560/26-030 | Cover assembly | 1 | | |
| M24560/26-031 | Cover | 1 | QQ-A-250/7 | Aluminum alloy, temper H32 |
| M24560/26-032 | Identification plate | 1 | MIL-P-15024 | Types A, B, or C; color style IV |
| M24560/26-033 | Cable, safety | 1 | MS17339 | MS17339-2, 10.0 long |
| M24560/25-013 | Bracket | 3 | QQ-A-250/7 | Aluminum alloy, temper H32 |
| M24560/25-022 | Pad | 4 | QQ-A-250/7 | Aluminum alloy, temper H32 |
| M24560/25-034 | Rivet, solid - univ. head | 4 | MS20470 | MS20470A4-5-5A, 0.125 dia. x 0.344 long |
| M24560/25-035 | Rivet, cable retaining | 1 | MS17312 | MS17312-1, 0.156 dia. x 0.281 long |
| M24560/25-040 | Fastener | 3 | COML | See note 1 |
| M24560/25-041 | Stud | 3 | COML | CRES, 300 series |
| M24560/25-042 | Retainer | 3 | COML | CRES, 300 series |
| M24560/25-043 | Receptacle | 3 | COML | CRES, 300 series |
| M24560/4-001 | Navigation light assembly | 1 | MIL-P-24560/4 | Red, symbol 190.1 |
| M24560/6-001 | Navigation light assembly | 1 | MIL-P-24560/6 | Clear, symbol 192.1 |

1/ Part numbers M24560/26-010 through M24560/26-032 were assigned for reference purposes only.

Preparing activity:
Navy - SH
(Project 6220-N358-18)



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:59Z
Check the source to verify that this is the current version before use.