
MILITARY SPECIFICATION SHEET

LIGHT, APPROACH (HULL CONTOUR), BLUE, 120 VOLTS, 25 WATTS, ONE LAMP, SYMBOL 164.3

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the light described herein shall consist of this specification and the latest issue of MIL-L-24560(SH).

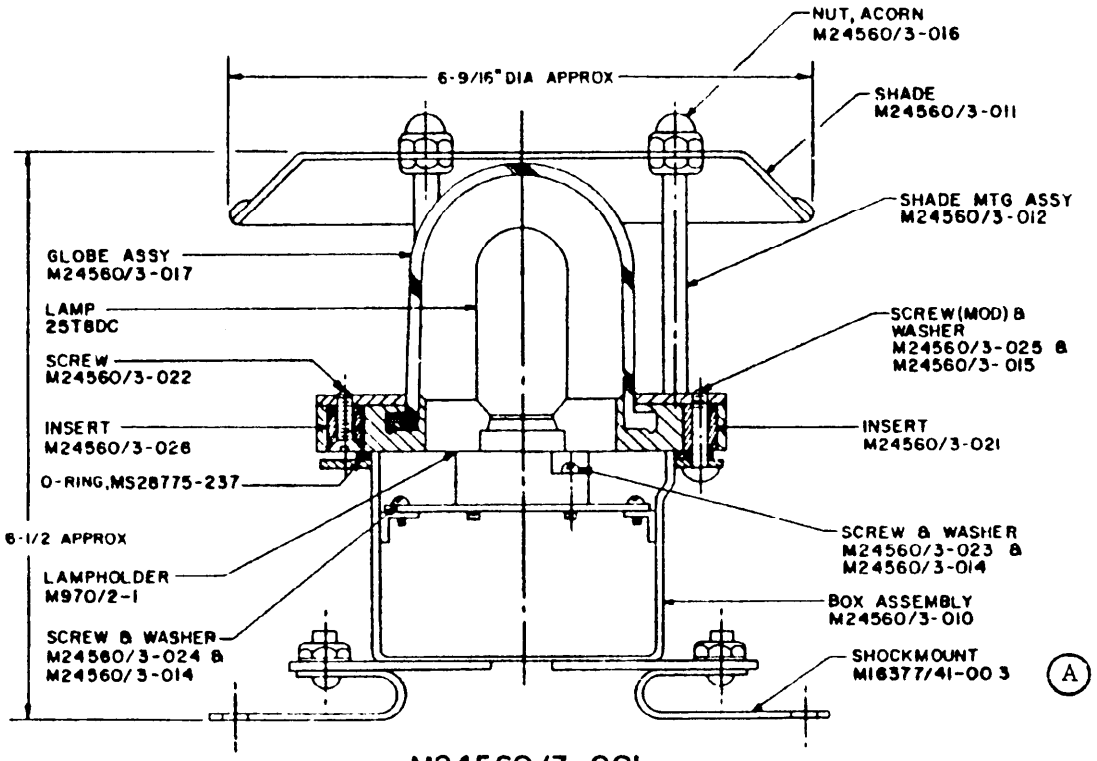

M24560/3-001

SH11410


ASSEMBLY, APPROACH, SYM 164.3

All dimensions in inches.
For tolerances, other than specified herein, see paragraph 3.4.1.1 of MIL-L-24560.

(A) denotes changes.

FSC 6220

Source: https://assist.dla.mil -- Downloaded: 20260-19T22:55Z
Check the source to verify that this is the current version before use.

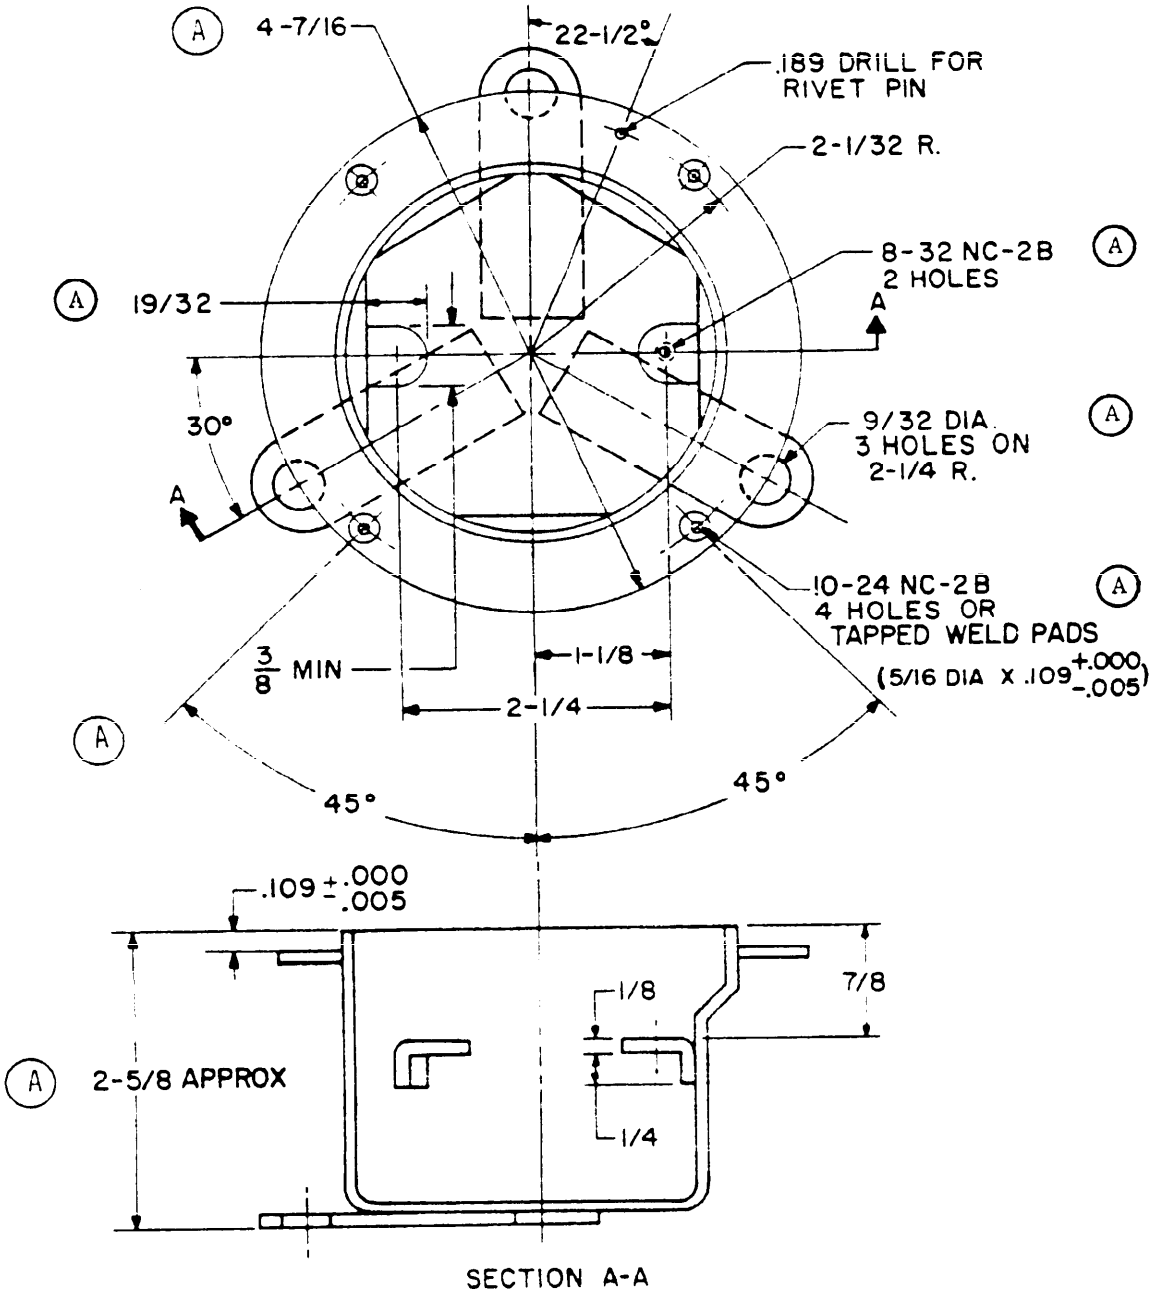


SECTION A-A

M24560/3-010

BOX ASSEMBLY

SH11410-1

Source: https://assist.dla.mil -- Downloaded: 202610-19T22:55Z
Check the source to verify that this is the current version before use.

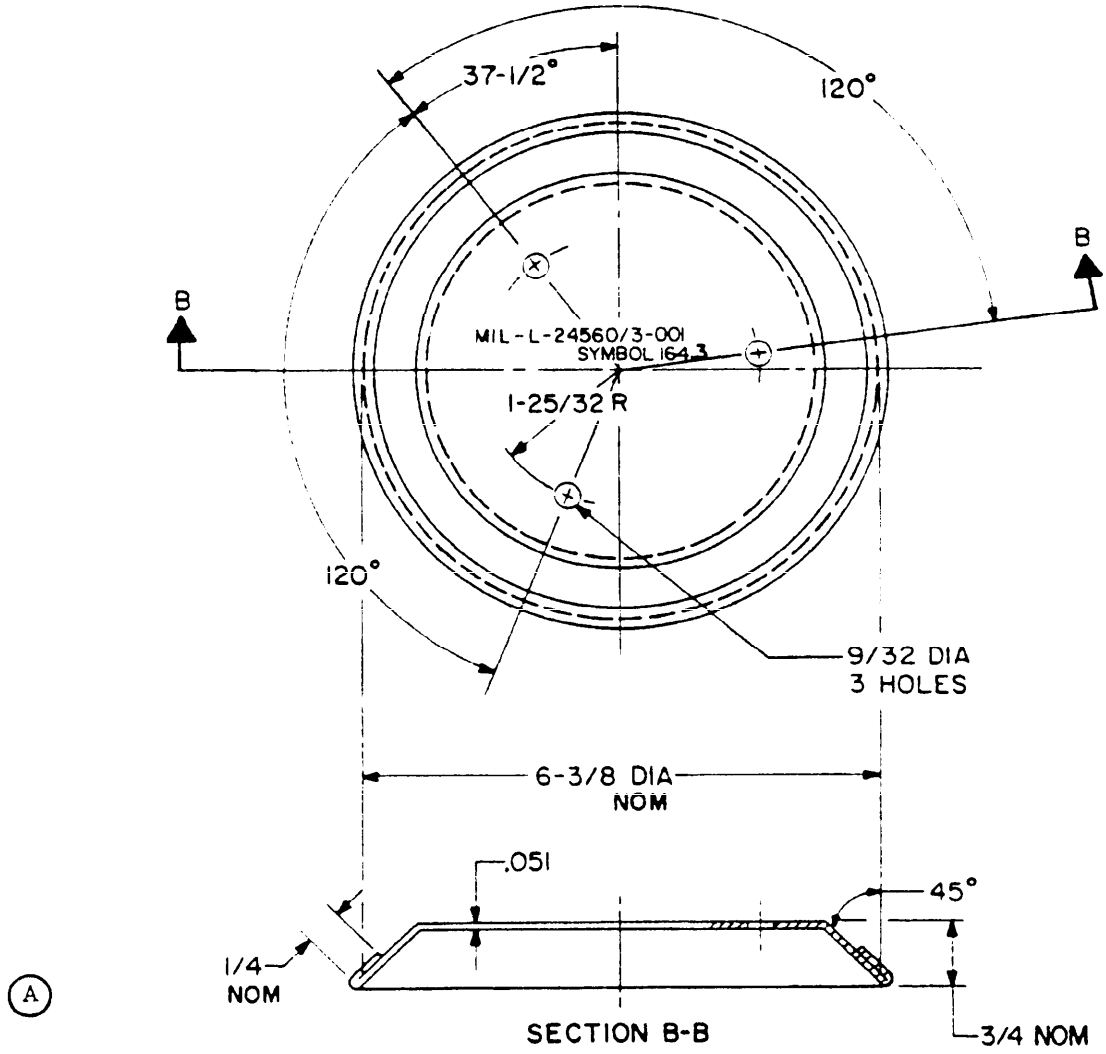


M24560/3-011

SHADE

SH11410-2

Source: https://assist.dla.mil -- Downloaded: 202610-19T22:55Z
Check the source to verify that this is the current version before use.

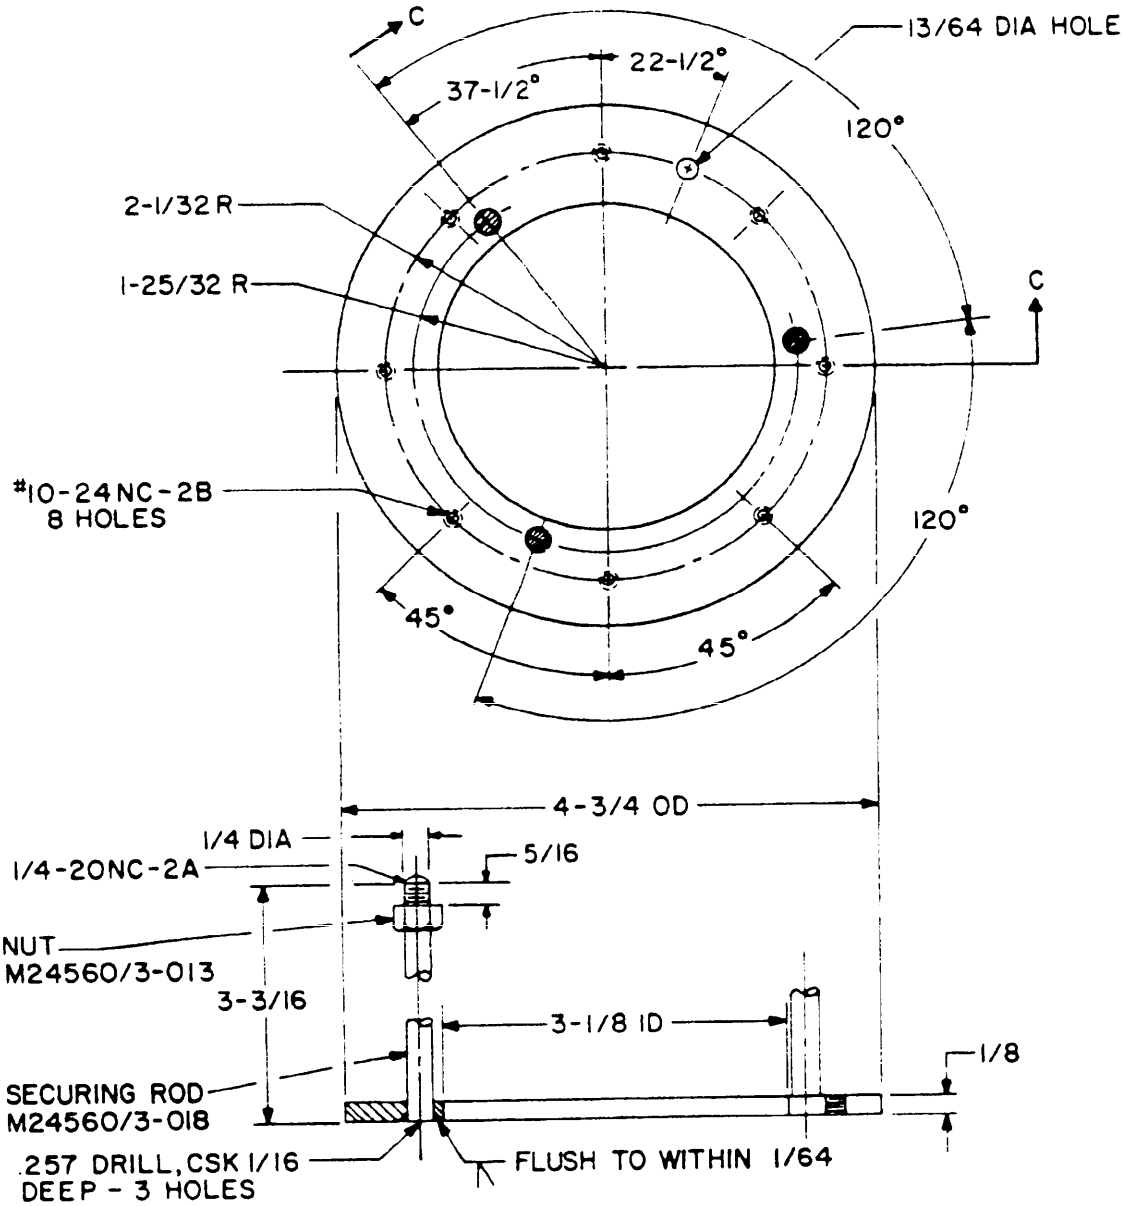

SECTION C-C


M24560/3-012

SHADE MOUNTING ASSEMBLY


SH11410-3

Source: https://assist.dla.mil -- Downloaded: 202610-19T22:55Z
Check the source to verify that this is the current version before use.

(A)

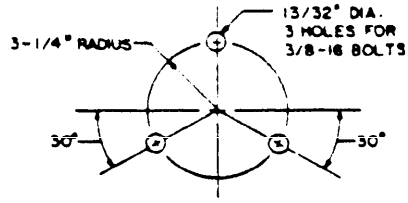

MOUNTING DIMENSIONS

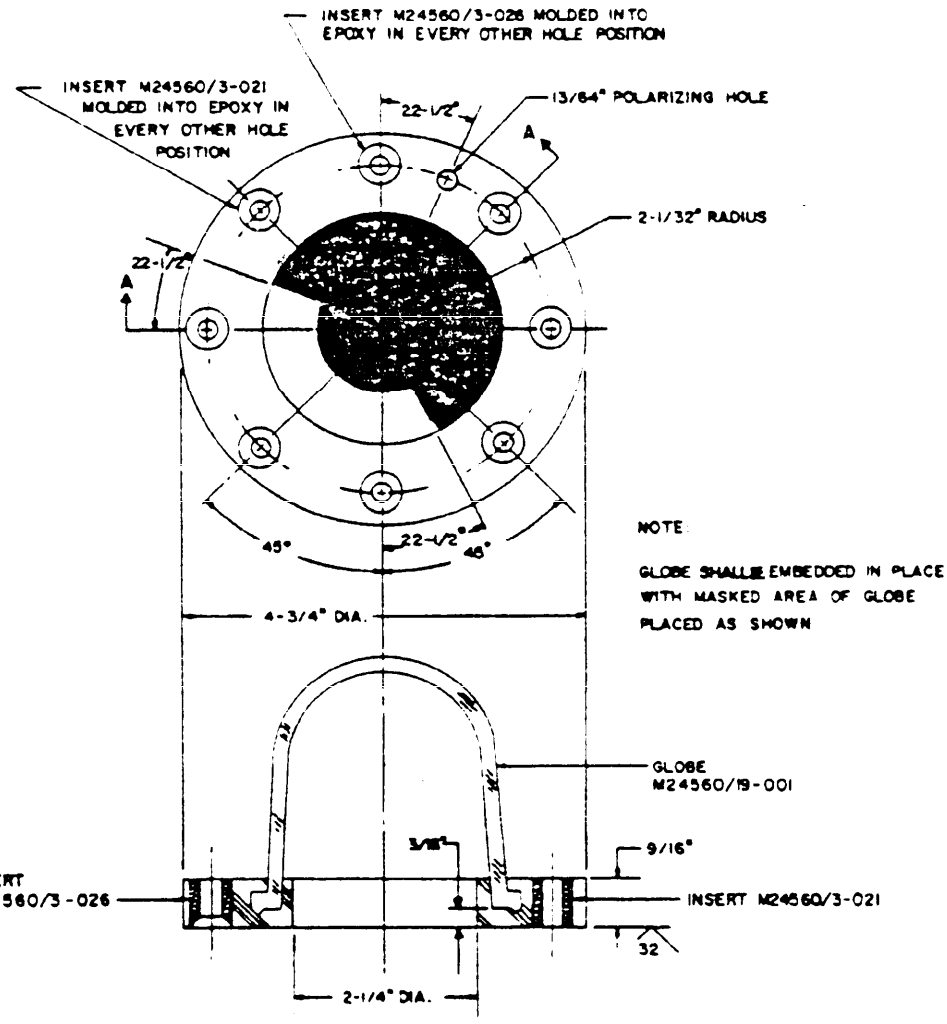


SECTION A-A

(A) (A) SH11410-4


M24560/3-017
GLOBE ASSEMBLY

Source: https://assist.dla.mil -- Downloaded: 202610-19T22:55Z
Check the source to verify that this is the current version before use.


Ⓐ

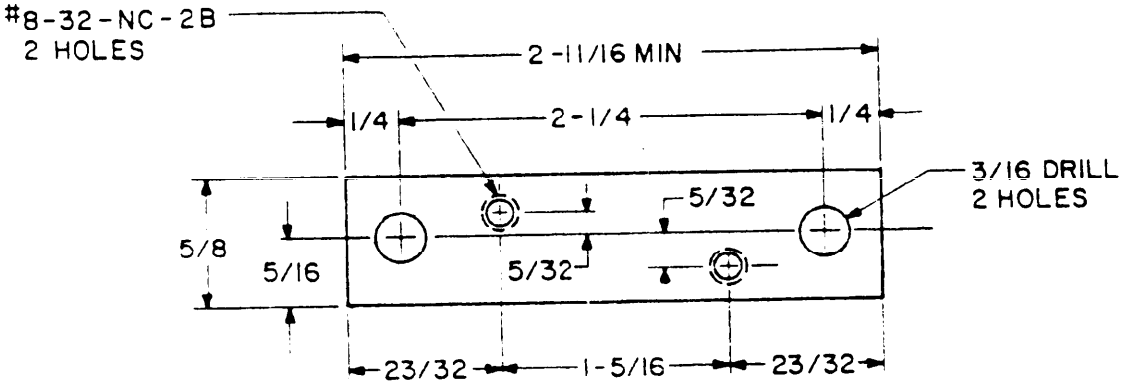

M24560/3-020
PLATE, LAMPHOLDER

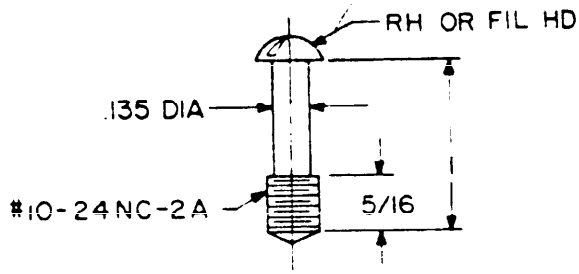

M24560/3-025
SCREW (MOD)

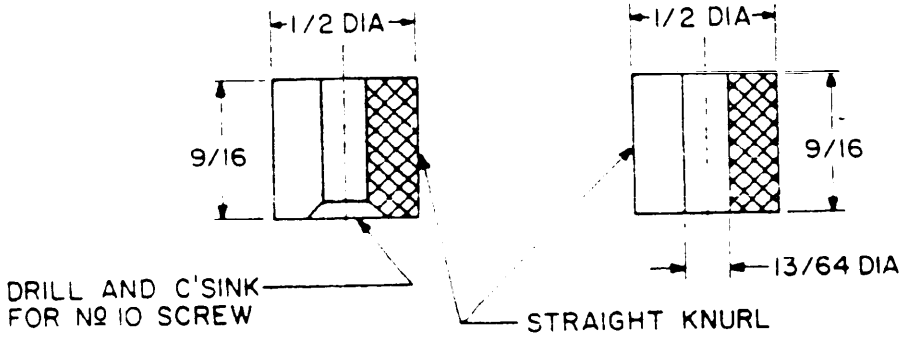

M24560/3-026
INSERT

M24560/3-021
INSERT

SH11410-5

Source: https://assist.dla.mil -- Downloaded: 202610-19T22:55Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

DESIGN:
Electrical rating: 120 volts, 60 Hertz, 25 watts
Dimensions and configuration: See figures
Enclosure: Splashproof (type I)
Parts: See table I
First article: Examination of product, magnetic permeability, operation, dielectric withstanding voltage, vibration, shock, salt spray, degree of enclosure.

GENERAL INFORMATION: Assignment of Military part numbers and general information is as follows:

a. Military part number: M24560/3-001 - (Light assembly - Sym 164.3).
b. Weight: The weight of this light assembly shall be 2.1 pounds, maximum.

NOTE:
1. The exterior surfaces shall be given two coats of gray enamel and (A) the interior surfaces shall be given two coats of white baked enamel of a good commercial grade. The underside of the shape (M24560/3-011) is considered to be an interior surface.

TABLE I. Parts.

Part number 1/	Part name	Quantity	Specification	Additional information
M24560/3-010	Box assembly	1	QQ-A-250/8	AL
M24560/3-011	Shade	1	QQ-A-250/8	AL
M24560/3-012	Shade mtg assembly	1	QQ-A-250/8	AL
M24560/3-013	Nut, hex	3	COML	CRES, 1/4-20 NC-2B
M24560/3-014	Washer, lock	4	COML	CRES, #8
M24560/3-015	Washer, lock	4	COML	CRES, #10
M24560/3-016	Nut, acorn	3	COML	CRES, 1/4-20 NC-2B self-lock
M24560/3-017	Globe assembly	1	----	----
M24560/3-018	Rod, securing	3	QQ-A-225/7	AL
M24560/3-019	Ring, globe	1	MIL-I-16923	Epoxy resin type C
M24560/3-020	Plate, lampholder	1	QQ-A-250/8	AL
M24560/3-021	Insert	5	QQ-A-225/7	AL
M24560/3-022	Screw, mach F.H.	4	COML	CRES, #10-24 NC-2A x 3/4 LG
M24560/3-023	Screw, mach R.H.	2	COML	CRES, #8-32 NC-2A x 5/8 LG
M24560/3-024	Screw, mach R.H.	2	COML	CRES, #8-32 NC-2A x 3/8 LG
M24560/3-025	Screw, mach R.H. (Mod)	4	COML	CRES, #10-24 NC-2A x 1 LG
M24560/3-026	Insert	4	QQ-A-225/7	AL
	Lamp	1	COML	25T8DC
M970/2-1	Lampholder	1	MIL-L-970/2	
(A) M16377/41-003	Shockmount	3	MIL-F-16377/41	AL
MS28775-237	O-Ring	1	MS28775	
M24560/19-001	Globe	1	MIL-L-24560/19	Blue

1/ Part numbers M24560/3-010 through M24560/3-026 were assigned for reference purposes only.

Preparing activity:
Navy - SH
(Project 6220-N296)

Source: https://assist.dla.mil -- Downloaded: 202610-19T22:55Z
Check the source to verify that this is the current version before use.