
INCH-POUND
MIL-L-24560/4A(SH)
17 August 1990
SUPERSEDING
MIL-L-24560/4(SH)
10 September 1979

MILITARY SPECIFICATION SHEET

# LIGHT, SIGNAL, RED, 120 VOLTS, 90 WATTS, SIX LAMPS, SYMBOL 190.1

**This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.**

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-L-24560(SH).

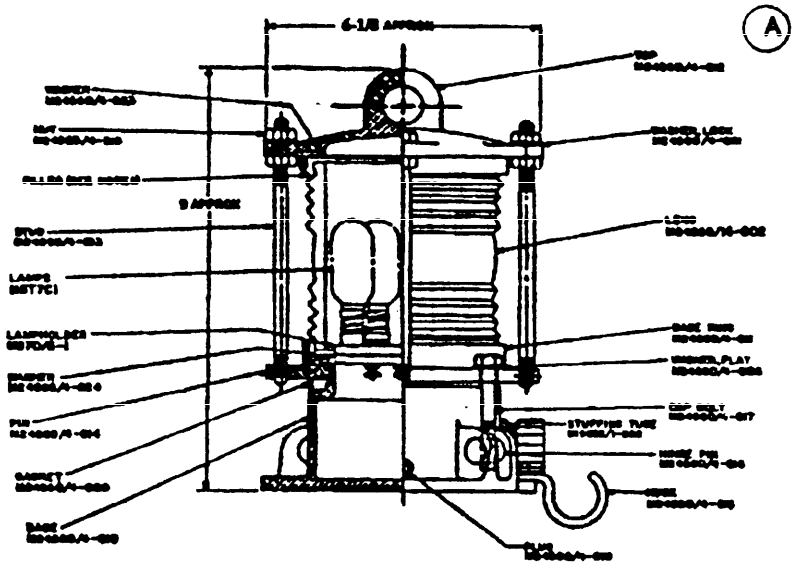


SH11411

M24560/4-001
ASSEMBLY, SIGNAL, SYM 190.1

FIGURE 1. Light assembly.


All dimensions are in inches.
For tolerances other than those specified herein, see MIL-L-24560.

(A) denotes changes.

AMSC N/A FSC 6220
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:55Z
Check the source to verify that this is the current version before use.

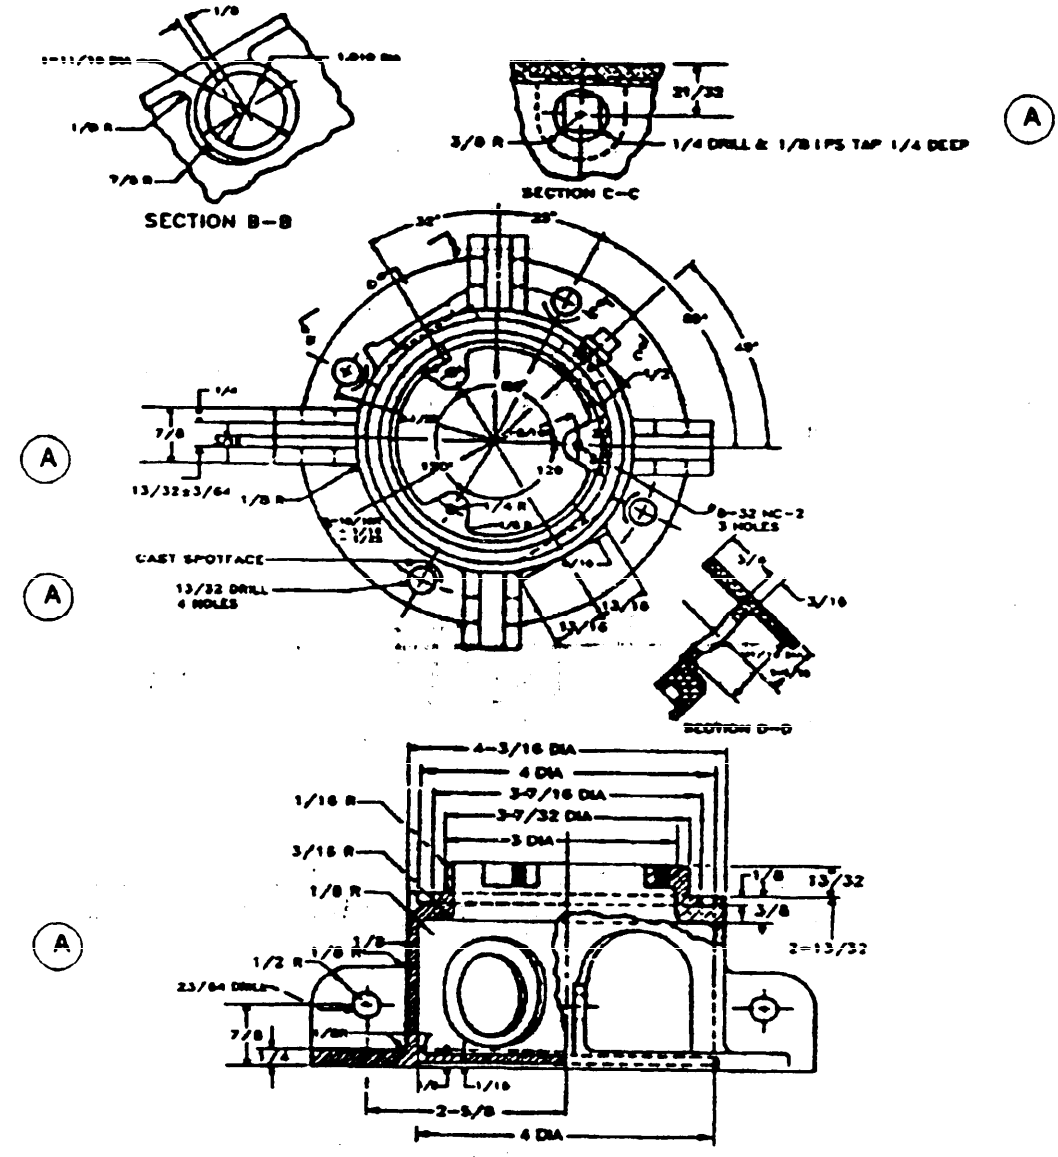


SH 11411-1

M24560/4-010

BASE


FIGURE 2. Base.




Source: https://assist.dla.mil -- Downloaded: 202610-19T22:55Z
Check the source to verify that this is the current version before use.

except where indicated as "CLEAR AREA" or "REMOVED" shall be finished white. [illegible] the inside surface of the window

NOTE: MOUNTING BOLTS SHALL BE 3/8-16 HEX. HD.t

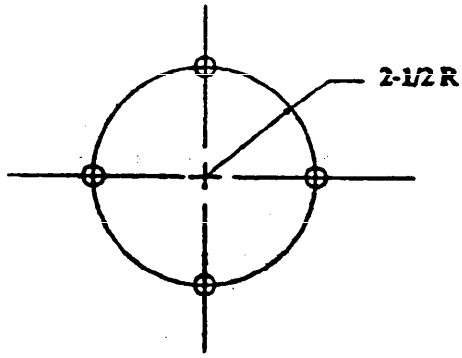


MOUNTING DIMENSIONS

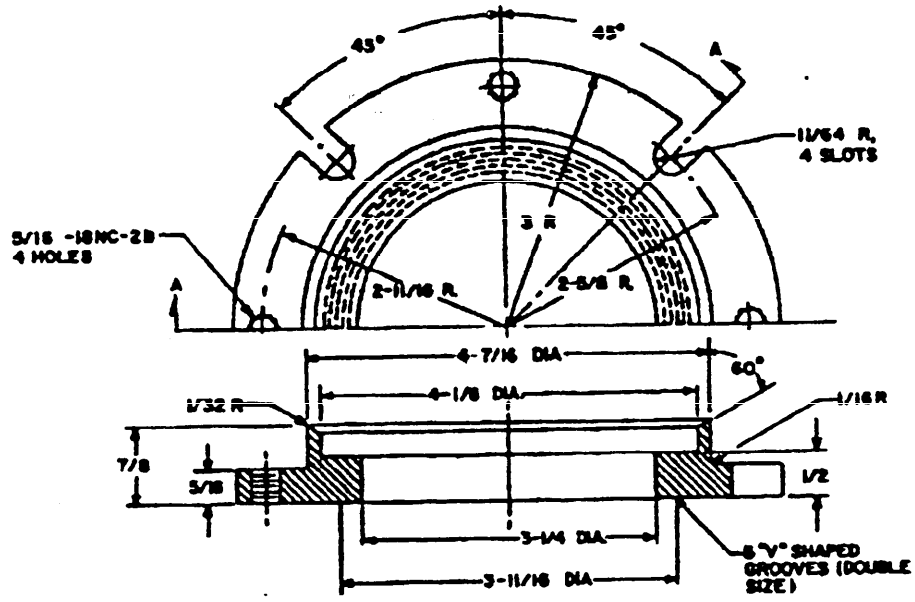


SECTION A-A

SH 11411-2


M24560/4-011

BASE RING

FIGURE 3. Mounting dimensions and base ring.



Source: https://assist.dla.mil -- Downloaded: 202610-19T22:55Z
Check the source to verify that this is the currentversion before use.

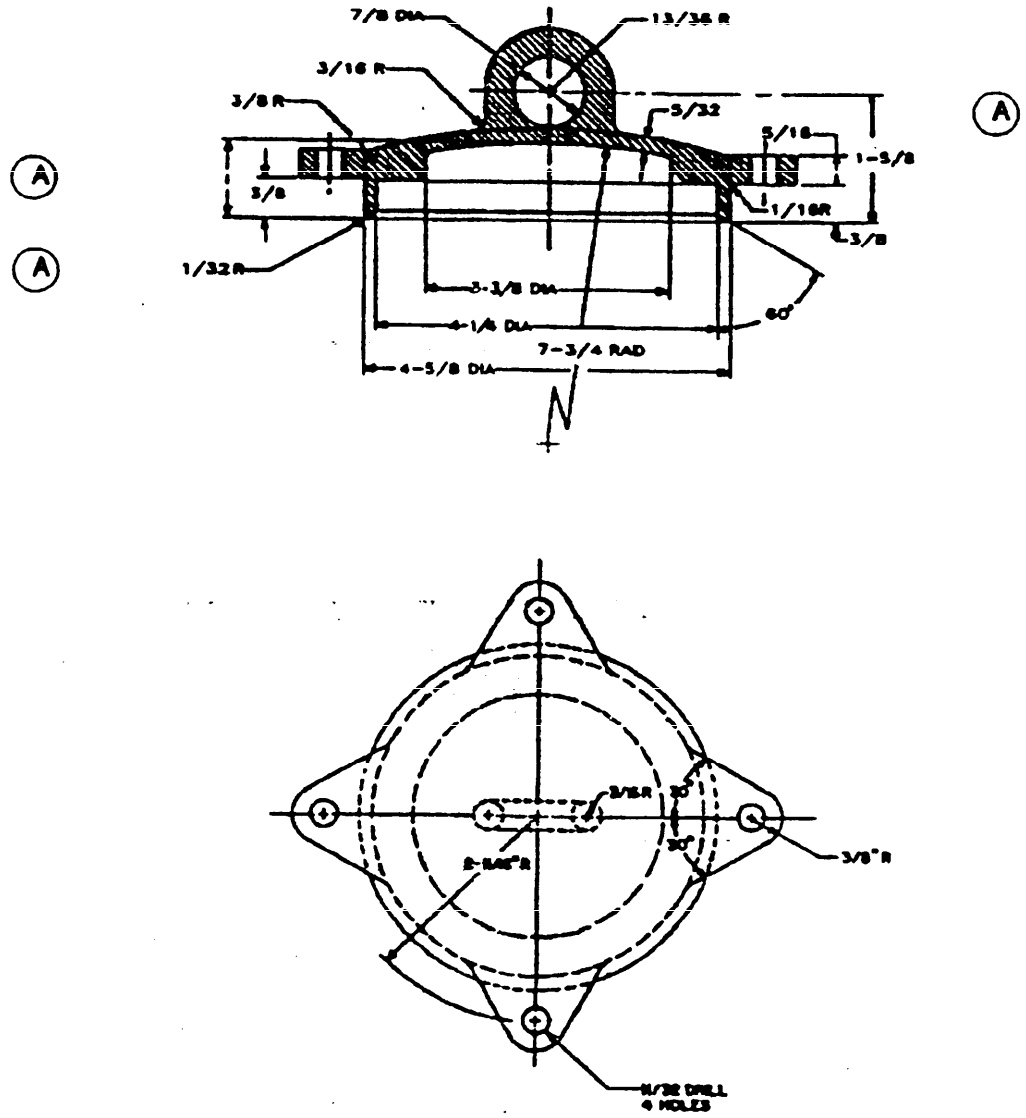


SH 11411-3


M24560/4-012

TOP


FIGURE 4. Top.




Source: https://assist.dla.mil -- Downloaded: 20261O-19T22:55Z
Check the source to verify that this is the currentversion before use.

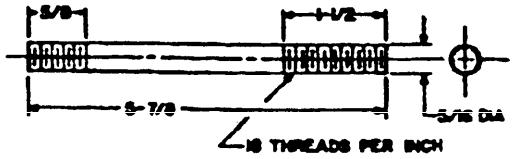


M24560/4-013
STUD

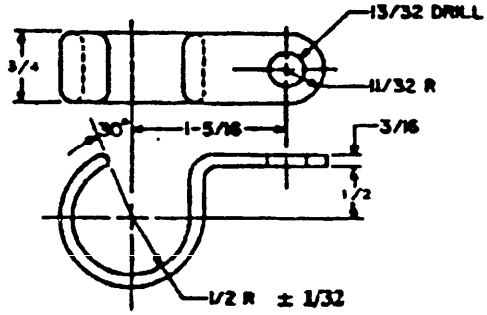


M24560/4-015
HOOK

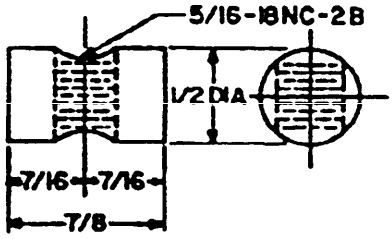



M24560/4-016
HINGE PIN

SH 11411-4


FIGURE 5. Stud, hook, and hinge pin.



Source: https://assist.dla.mil -- Downloaded: 202610-19T22:55Z
Check the source to verify that this is the current version before use.

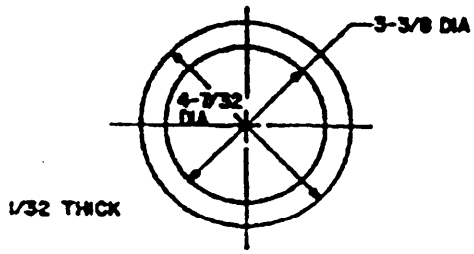


M24560/4-023
WASHER

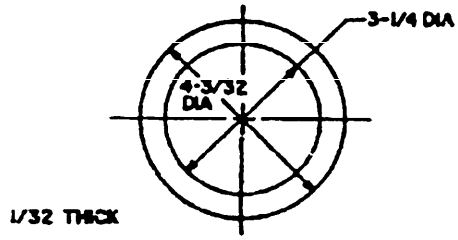


M24560/4-024
WASHER

SH 11411-S

FIGURE 6. Washers.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:55Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

DESIGN:
Electrical rating: 120 volts, 60 hertz, 90 watts.
Dimensions and configuration: See figures.
Enclosure: Splashproof (type I).
Parts: See table I.
First article: Examination of product, magnetic permeability, operation, dielectric withstanding voltage, vibration, shock, salt spray, degree of enclosure.

GENERAL INFORMATION: Military part numbers and general information are as follows:

(a) Military part number: M24560/4-001 - light assembly, symbol 190.1.
(A) (b) Weight: The weight of this light assembly shall be not greater than 14 pounds.

NOTES:

1. This space shall be packed with a caulking compound to provide a weather and heat resistant splashproof seal.
2. Gasket M24560/4-020 shall be in four segments of equal length cemented in place with seams left open to permit the light to breathe.

TABLE I. Parts.

| Part number 1/ | Part name | Qty. | Specification | Additional information |
|---|---|---|---|---|
| M24560/4-010 | Base | 1 | QQ-C-390 | Bronze |
| M24560/4-011 | Base ring | 1 | QQ-C-390 | Bronze |
| M24560/4-012 | Top | 1 | QQ-C-390 | Bronze |
| M24560/4-013 | Stud | 4 | QQ-B-637 | Brass |
| (A) M24560/4-014 | Pin | 4 | QQ-B-626 | Brass, 1/16 dia x length to suit 2/ |
| M24560/4-015 | Hook | 1 | QQ-B-613 | Brass |
| M24560/4-016 | Hinge pin | 4 | QQ-B-626 | Brass |
| (A) M24560/4-017 | Bolt, hex head | 4 | COML | Brass, 5/16-19 UNC-2A x 2-1/2 long |
| (A) M24560/4-018 | Nut, hex | 8 | COML | Brass, 5/16-18 UNC-2B |
| M24560/4-019 | Plug | 1 | COML | Brass, 1/8 IPS |
| (A) M24560/4-020 | Gasket | 1 | MIL-R-900 | Rubber, 1/4 x 1/4 x length to suit |
| M24560/4-021 | Washer, lock | 4 | COML | Bronze, 5/16 |
| M24560/4-022 | Washer, lock | 3 | COML | Phosphor bronze #8 |

See footnotes at end of table.



Source: https://assist.dla.mil -- Downloaded: 20261O-19T22:55Z
Check the source to verify that this is the current version before use.

TABLE I. Parts - Continued.

| Part number 1/ | Part name | Qty. | Specification | Additional information |
|---|---|---|---|---|
| M24560/4-023 | Washer (upper) | 1 | COML | Teflon |
| M24560/4-024 | Washer (lower) | 1 | COML | Teflon |
| (A) M24560/4-025 | Screw, mach R.H. | 3 | COML | Brass, 6-32 UNC-2A x 1 long |
| M24560/4-026 | Washer, flat | 4 | COML | Brass, 3/8 ID x 7/8 OD x 0.070 thick |
| M19622/1-002 | Stuffing tube | 1 | MIL-S-19622/1 | |
| M970/5-1 | Lampholder | 1 | MIL-L-970/5 | |
| | Lamp | 6 | COML | 15T7C |
| M24560/16-002 | Lens | 1 | MIL-L-24560/16 | Red |

1/ Part numbers M24560/4-010 through M24560/4-026 were assigned for reference purposes only.

(A) 2/ Pin M24560/4-014 may be CRES in lieu of brass.

Preparing activity:
Navy - SH
(Project 6220-N358-01)



Source: https://assist.dla.mil -- Downloaded: 20261O-19T22:55Z
Check the source to verify that this is the current version before use.