
MILITARY SPECIFICATION SHEET

LIGHT, SIGNAL, CLEAR, 120 VOLTS, 45 WATTS, THREE LAMPS, SYMBOL 192.1

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the light described herein shall consist of this specification and the latest issue of MIL-L-24560(SH).

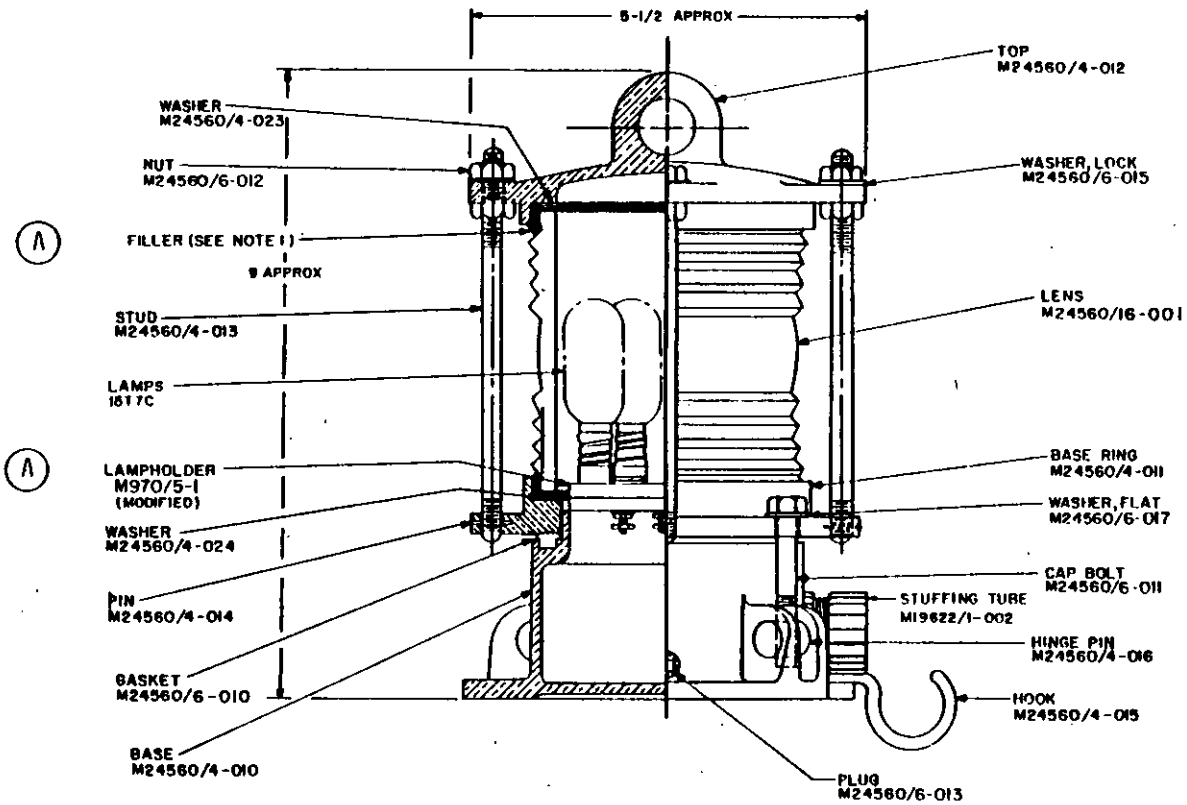

M24560/6-001

ASSEMBLY, SIGNAL, SYM 192.1

SH11413

All dimensions in inches.
For tolerances, other than specified herein, see paragraph 3.4.1.1 of MIL-L-24560.

(A) denotes changes.

FSC 6220

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:55Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

DESIGN:
Electrical rating: 120 volts, 60 Hertz, 45 watts
Dimensions and configuration: See figures
Enclosure: Splashproof (type I)
Parts: See table I
First article: Examination of product, magnetic permeability, operation, dielectric withstanding voltage, vibration, shock, salt spray, degree of enclosure.

GENERAL INFORMATION: Assignment of Military part numbers and general information is as follows:

a. Military part number: M24560/6-001 - (Light assembly - sym 192.1)
b. Supersedes symbol 192.1 NAVSHIPS Drawing 4335L
c. Weight: The weight of this light assembly shall be 14 pounds maximum.

NOTES:
1. This space shall be packed with a type of caulking compound, to provide a weather and heat resistant splashproof seal.
2. Gasket M24560/6-010 shall be in four segments of equal length cemented in place with seams left open, to permit the light to breathe.

TABLE I. Parts.

Part number 1/	Part name	Quantity	Specification	Additional information
M24560/6-010	Gasket	1	MIL-R-900	Rubber, 3/16 x 1/4 x length to suit
M24560/6-011	Bolt, hex head	4	COML	Brass, 5/16 - 18 NC-2 x 2-3/8 LG
M24560/6-012	Nut hex	8	COML	Brass, 5/16 - 18 NC-2
M24560/6-013	Plug	1	COML	Brass, 1/8 IPS
M24560/6-014	Washer, lock	3	COML	Phosphor bronze #8
M24560/6-015	Washer, lock	4	COML	Bronze, 5/16
M24560/6-016	Screw, mach R.H.	3	COML	Brass, #8-32 NC-2 x 1 LG
M24560/6-017	Washer, flat	4	COML	Brass, 11/32 ID x 3/4 OD x 0.040 TK
M24560/4-010	Base	1	QQ-C-390	Bronze
M24560/4-011	Base ring	1	QQ-C-390	Bronze
M24560/4-012	Top	1	QQ-C-390	Bronze
M24560/4-013	Stud	4	QQ-B-637	Brass
M24560/4-014	Pin	4	QQ-B-626	Brass, 1/16 dia x length to suit
M24560/4-015	Hook	1	QQ-B-613	Brass
M24560/4-016	Hinge pin	4	QQ-B-626	Brass
M24560/4-023	Washer (upper)	1	COML	TEFLON
M24560/4-024	Washer (lower)	1	COML	TEFLON
M19622/1-002	Stuffing tube	1	MIL-S-19622/1	
M970/5-1 (Mod)	Lampholder	1	MIL-L-970/5	3 Sockets only 120° apart
(A)	Lamp	3	COML	15T7C
M24560/16-001	Lens	1	MIL-L-24560/16	Clear

1/ Part numbers M24560/6-010 through M24560/6-017 were assigned for reference purposes only.

Preparing activity:
Navy - SH
(Project 6220-N297)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:55Z
Check the source to verify that this is the current version before use.