INCH-POUND
MIL-L-24560/6B(SH)
17 August 1990
SUPERSEDING
MIL-L-24560/6A(SH)
18 November 1981


MILITARY SPECIFICATION SHEET

# LIGHT, SIGNAL, CLEAR, 120 VOLTS, 45 WATTS, THREE LAMPS, SYMBOL 192.1

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-L-24560(SH).

(B)

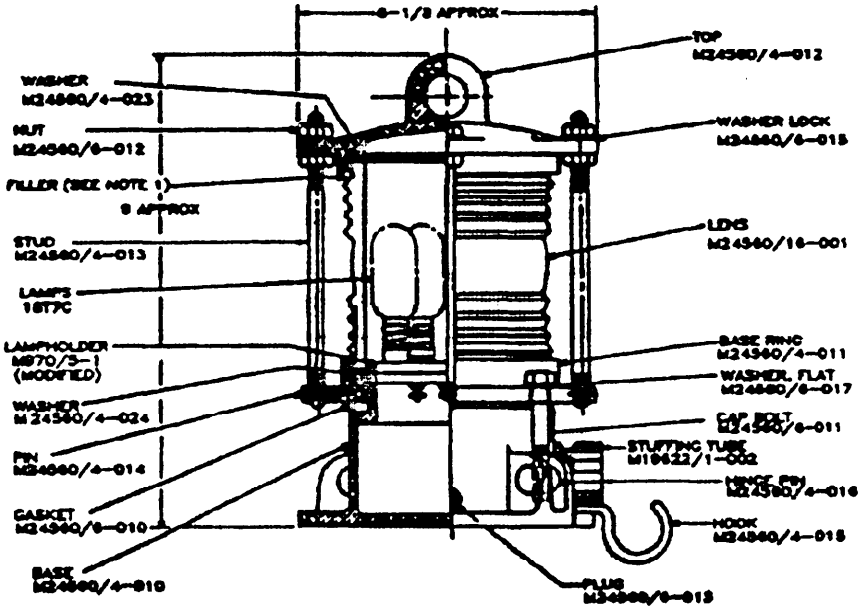


SIZE 11413 M24560/6-001

ASSEMBLY, SIGNAL, SYM 192.1

FIGURE 1. Light assembly.

All dimensions are in inches.
For tolerances other than those specified herein, see MIL-L-24560.

(B) denotes changes.

AMSC N/A FSC 6220

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.



Source: https://assist.dla.mil -- Downloaded: 20261O-19T22:55Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

DESIGN:
Electrical rating: 120 volts, 60 hertz, 45 watts.
Dimensions and configuration: See figure.
Enclosure: Splashproof (type I).
Parts: See table I.
First article: Examination of product, magnetic permeability, operation, dielectric withstanding voltage, vibration, shock, salt spray, degree of enclosure.

GENERAL INFORMATION: Military part numbers and general information are as follows:

(a) Military part number: M24560/6-001 - light assembly, symbol 192.1.
(B) (b) Weight: The weight of this light assembly shall be not greater than 14 pounds.

NOTES:

(B) 1. This space shall be packed with a caulking compound to provide a weather and heat resistant splashproof seal.
2. Gasket, M24560/6-010 shall be in four segments of equal length, cemented in place with seams left open to permit the light to breathe.

TABLE I. Parts.

| | Part number 1/ | Part name | Qty. | Specification | Additional information |
|---|---|---|---|---|---|
| (B) | M24560/6-010 | Gasket | 1 | MIL-R-900 | Rubber, 1/4 x 1/4 x length to suit |
| (B) | M24560/6-011 | Bolt, hex head | 4 | COML | Brass, 5/16-18 UNC-2 x 2-1/2 long |
| (B) | M24560/6-012 | Nut, hex | 8 | COML | Brass, 5/16-18 UNC-2 |
| | M24560/6-013 | Plug | 1 | COML | Brass, 1/8 IPS |
| | M24560/6-014 | Washer, lock | 3 | COML | Phosphor bronze #8 |
| | M24560/6-015 | Washer, lock | 4 | COML | Bronze, 5/16 |
| | M24560/6-016 | Screw, mach R.H. | 3 | COML | Brass, #8-32 UNC-2 x 1 long |
| (B) | M24560/6-017 | Washer, flat | 4 | COML | Brass, 3/8 ID x 7/8 OD x 0.070 thick |
| | M24560/4-010 | Base | 1 | QQ-C-390 | Bronze |
| | M24560/4-011 | Base ring | 1 | QQ-C-390 | Bronze |
| | M24560/4-012 | Top | 1 | QQ-C-390 | Bronze |
| | M24560/4-013 | Stud | 4 | QQ-B-637 | Brass |
| (B) | M24560/4-014 | Pin | 4 | QQ-B-626 | Brass, 1/16 dia x length to suit 2/ |

See footnotes at end of table.



Source: https://assist.dla.mil -- Downloaded: 20260-19T22:55Z
Check the source to verify that this is the current version before use.

TABLE I. Parts - Continued.

| Part number 1/ | Part name | Qty. | Specification | Additional information |
|---|---|---|---|---|
| M24560/4-015 | Hook | 1 | QQ-B-613 | Brass |
| M24560/4-016 | Hinge pin | 4 | QQ-B-626 | Brass |
| M24560/4-023 | Washer (upper) | 1 | COML | Teflon |
| M24560/4-024 | Washer (lower) | 1 | COML | Teflon |
| M19622/1-002 | Stuffing tube | 1 | MIL-S-19622/1 | |
| M970/5-1 (Mod) | Lampholder | 1 | MIL-L-970/5 | Three sockets only 120 degrees apart |
| | Lamp | 3 | COML | 15T7C |
| M24560/16-001 | Lens | 1 | MIL-L-24560/16 | Clear |

1/ Part numbers M24560/6-010 through M24560/6-017 were assigned for reference purposes only.

(B) 2/ Pin M24560/4-014 may be CRES in lieu of brass.

Preparing activity:
Navy SH
(Project 6220-N358-03)



Source: https://assist.dla.mil -- Downloaded: 20261O-19T22:55Z
Check the source to verify that this is the current version before use.