
MIL-L-24560/9A(SH)
19 October 1981
SUPERSEDING
MIL-L-24560/9(SH)
10 September 1979

MILITARY SPECIFICATION SHEET

LIGHTS, NAVIGATION, SIDE, RED AND GREEN, 120 VOLTS, 50 WATTS, ONE LAMP, SYMBOLS 182.2 AND 183.2

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquisition of the lights described herein shall consist of this specification and the latest issue of MIL-L-24560(SH).

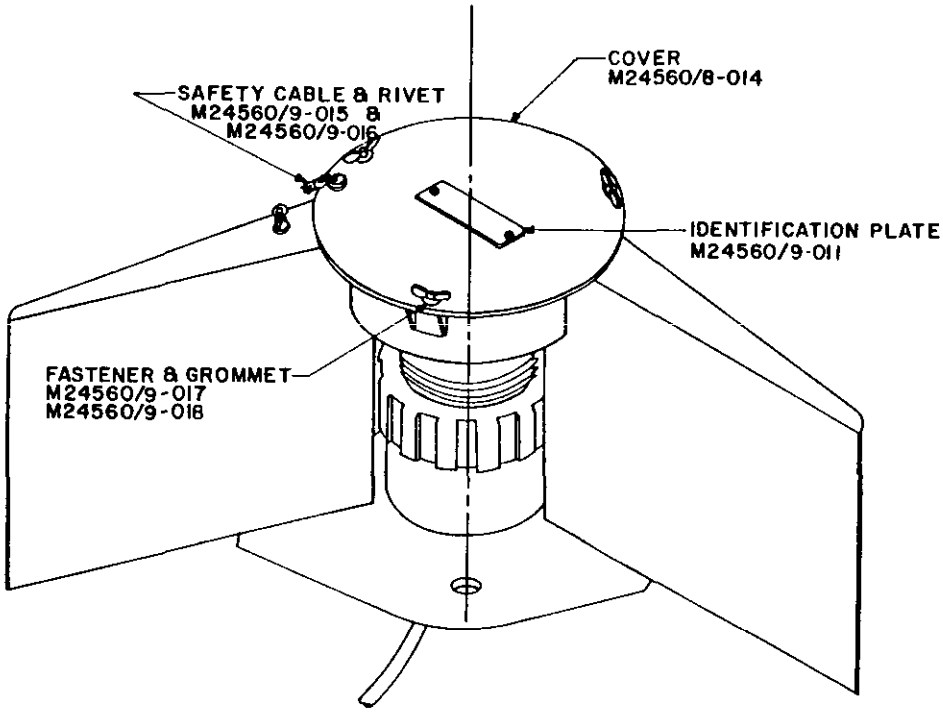

ASSEMBLY, SIDE LIGHT
M24560/9-001 - PORT - SYM. 182.2
M24560/9-002 - STBD - SYM. 183.2


SH 11416


All dimensions in inches.
For tolerances, other than specified herein, see paragraph 3.4.1.1 of MIL-L-24560.

(A) denotes changes.

FSC 6220

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:56Z
Check the source to verify that this is the current version before use.

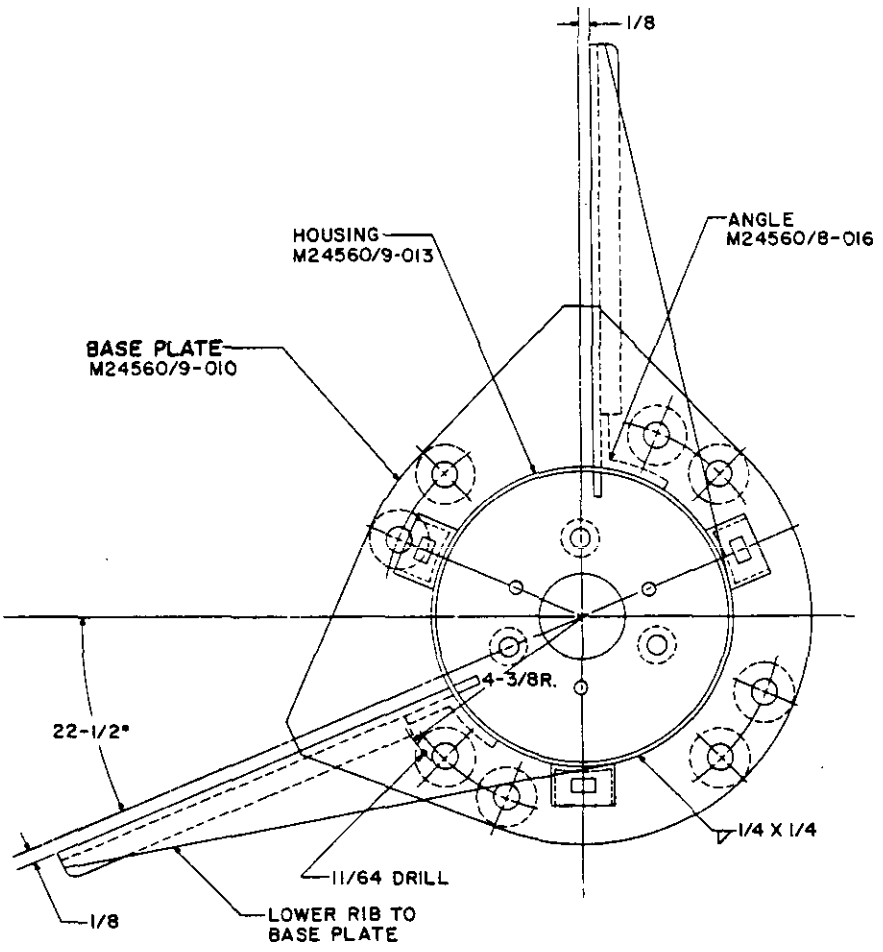


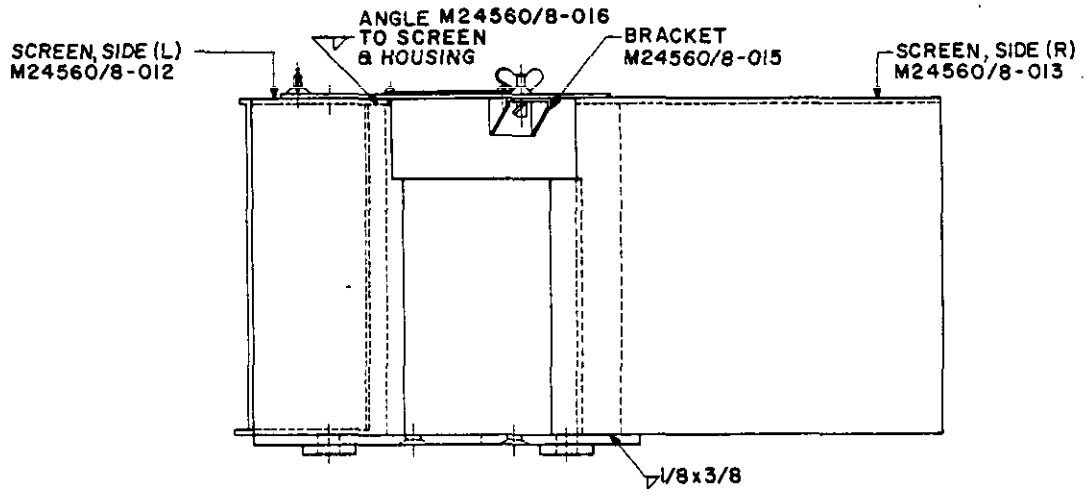


SH 11416-1

FABRICATION DETAILS
M24560/9-005

Source: https://assist.dla.mil -- Downloaded: 202640-19T22:56Z
Check the source to verify that this is the current version before use.

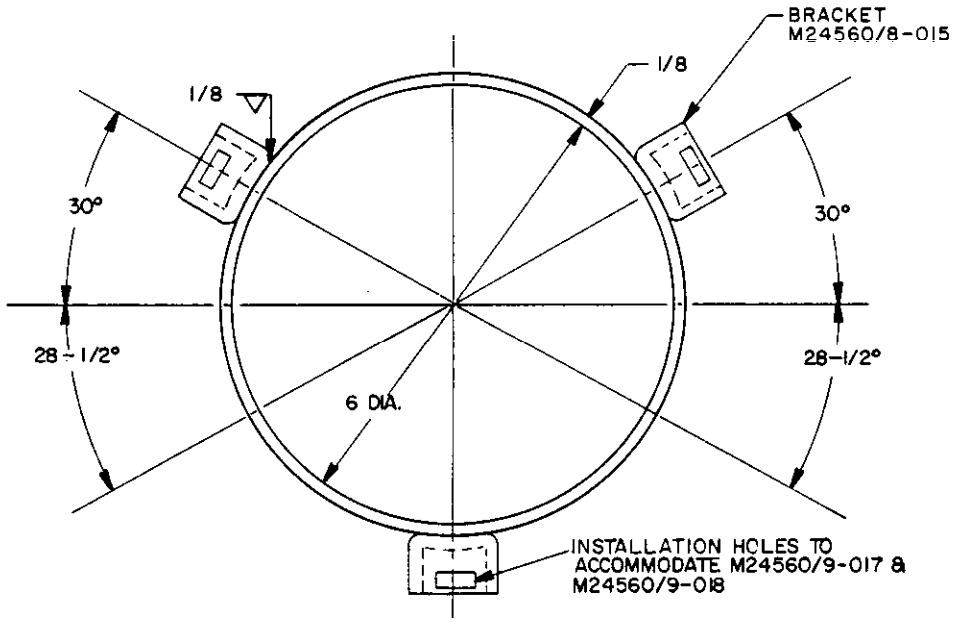


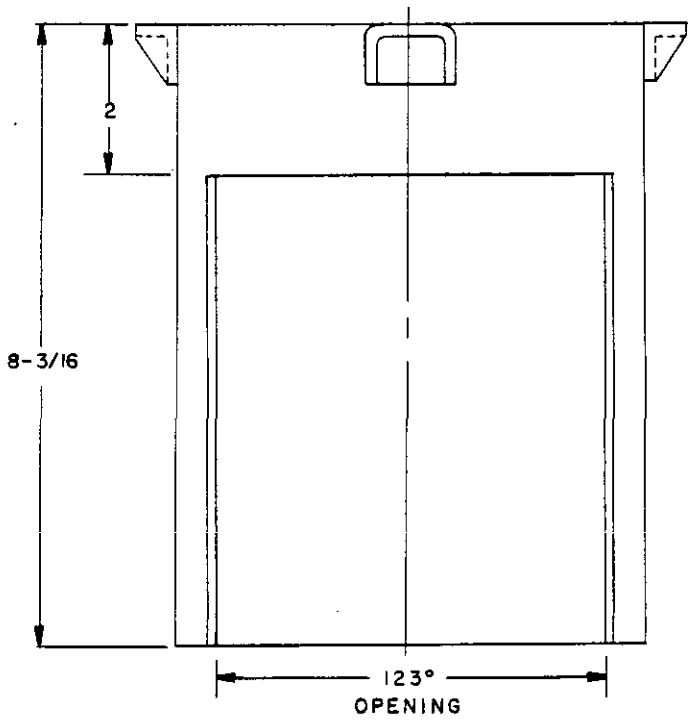


HOUSING
M24560/9-013

SH 11416-2

Source: https://assist.dla.mil -- Downloaded: 202610-19T22:56Z
Check the source to verify that this is the current version before use.

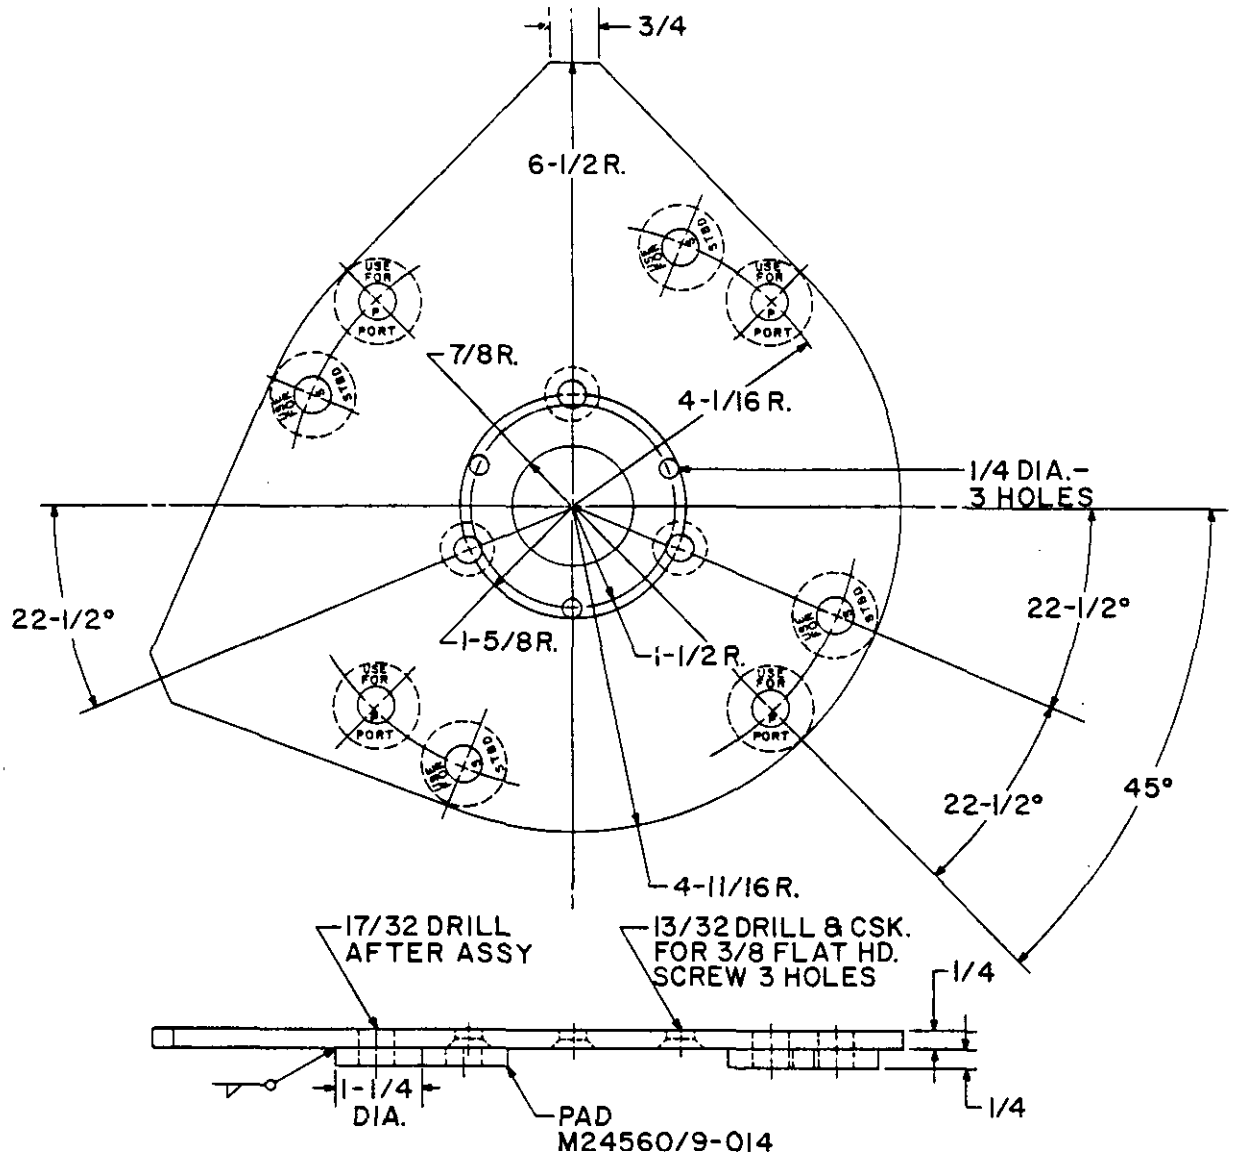

BASE PLATE
M24560/9-010

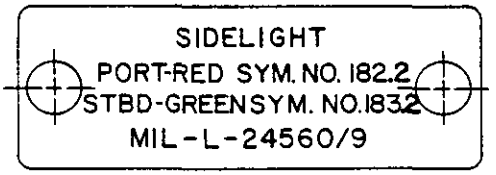

SH 11416-3

IDENTIFICATION PLATE
M24560/9-011

Source: https://assist.dla.mil -- Downloaded: 202640-19T22:56Z
Check the source to verify that this is the currentversion before use.

REQUIREMENTS:

DESIGN:

Electrical rating: 120 volts, 60 Hertz, 50 watts
Dimensions and configuration: See figures
Enclosure: Splashproof (type I)
Parts: See table I
First article: Examination of product, magnetic permeability, operation, vibration, shock, salt spray

GENERAL INFORMATION: Assignment of Military part numbers and general information is as follows:

a. Military part number: M24560/9-001, Port Light assembly (Sym 182.2)
M24560/9-002, Stbd Light assembly (Sym 183.2)
M24560/9-005, Side light shield assembly

(A) b. Weight: The weight of each light assembly shall be 18 pounds maximum.

NOTE 1. Spring-lock fastener shall be 1/4 wing head with clinch grommet, Simmons Fastner, No. Broadway, Albany, NY, or equal.

(A) NOTE 2. All illuminated surfaces of the shield assembly shall be given two coats of dull black paint per DOD-P-15146 Formula No. 104 and all other surfaces shall be given two coats of gray enamel of a good commercial grade.

(A) NOTE 3. Side light shield assembly M24560/9-005 consists of all parts listed in table I less light assembly.

TABLE I. Parts.

Part number 1/	Part name	Quantity	Specification	Additional information
M24560/9-010	Base Plate	1	COML	AL, 5052-H32
M24560/9-011	Identification Plate	1	MIL-P-15024	AL, Type H Size 4 normal service of MIL-P-15024/5
M24560/9-012	Screw, Mach F. H.	3	COML	CRES, 3/8-16 NC-2A x 5/8 LG
M24560/9-013	Housing	1	COML	AL, 5052-H32
M24560/9-014	Pad	4	COML	AL, 5052-H32
M24560/9-015	Rivet	4	COML	AL,
M24560/9-016	Safety Cable	1	COML	
M24560/9-017	Fastener	3	COML	See Note 1
M24560/9-018	Grommet	3	COML	See Note 1
M24560/8-012	Side Screen (Left)	1	COML	AL, 5052-H32
M24560/8-013	Side Screen (Right)	1	COML	AL, 5052-H32
M24560/8-014	Cover	1	COML	AL, 5052-H32
M24560/8-015	Bracket	3	COML	AL, 5052-H32
M24560/8-016	Angle	2	COML	AL, 5052-H32
M24560/2-002	Light Assembly - Red	1	MIL-L-24560/2	For use with Sym 182.2
M24560/2-003	Light Assembly - Green	1	MIL-L-24560/2	For use with Sym 183.2

1/ Part numbers M24560/9-010 through M24560/9-018 were assigned for reference purposes only.

Preparing activity:
Navy - SH
(Project 6220-N287)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:56Z
Check the source to verify that this is the current version before use.